

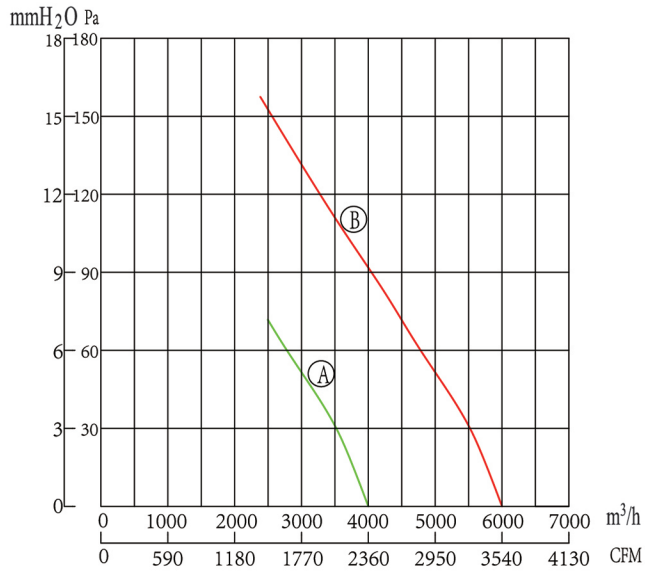


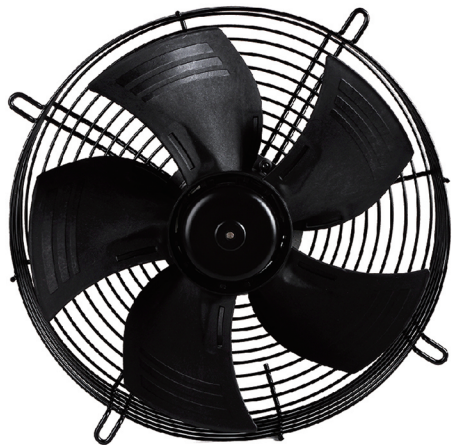


- 防护等级：IP54
- 绝缘等级：F
- 叶片数：5
- 叶片材质：PP
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C - +60°C
- 工作电压：200V-277V/1P 380V-480V/3P
- 调速方式：0~10V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Number of blades: 5
- Blades: PP
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 200V-277V/1P 380V - 480V/3P
- Std. Control: 0~10V or PWM Control

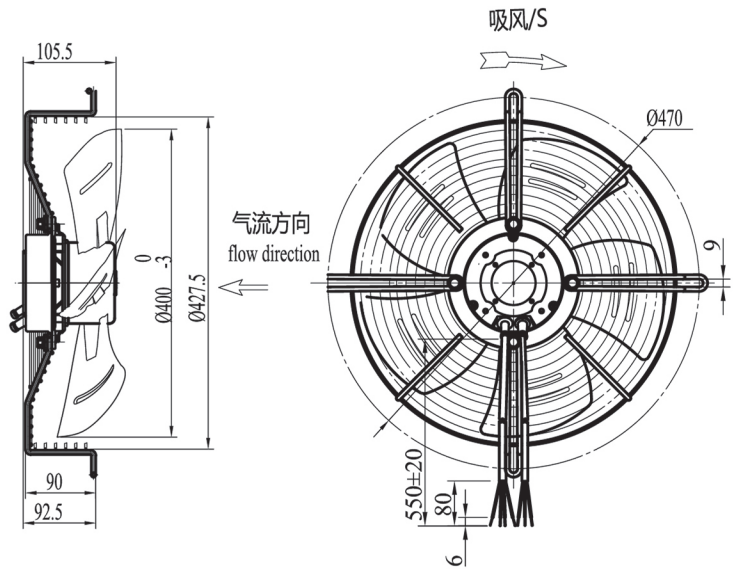


技术参数 Technical data

型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
BY2EC400/092/ I -IPSPK ①	230	50/60	1.2	173	1080	4000	75	2.7	69
BY2EC400/102/ III -IPSPK ②	230	50/60	2.3	500	1760	6000	180	3.2	79
BY6EC400/102/ IX -3PSPK ③	400	50/60	0.9	500	1760	6000	180	3.2	79

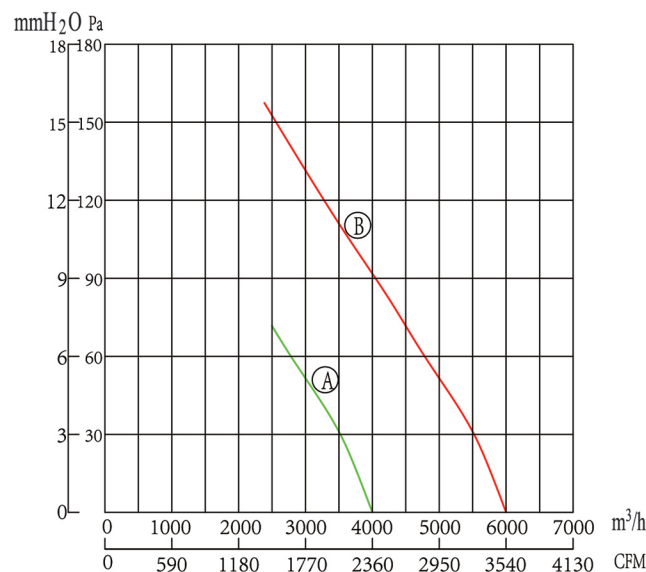

- 防护等级：IP54
- 绝缘等级：F
- 叶片数：5
- 叶片材质：PP
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C - +60°C
- 工作电压：200V-277V/1P 380V-480V/3P
- 调速方式：0~10V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Number of blades: 5
- Blades: PP
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 200V-277V/1P 380V - 480V/3P
- Std. Control: 0~10V or PWM Control

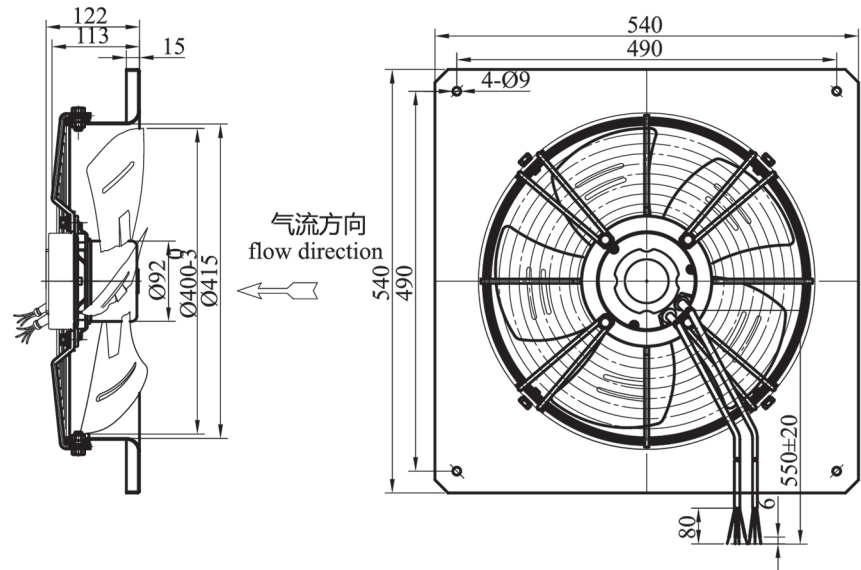

技术参数 Technical data

型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
BY2EC400/092/ I -IPSPK ①	230	50/60	1.2	173	1080	4000	75	2.7	69
BY2EC400/102/ III -IPSPK ②	230	50/60	2.3	500	1760	6000	180	3.2	79
BY6EC400/102/ IX -3PSPK ③	400	50/60	0.9	500	1760	6000	180	3.2	79