


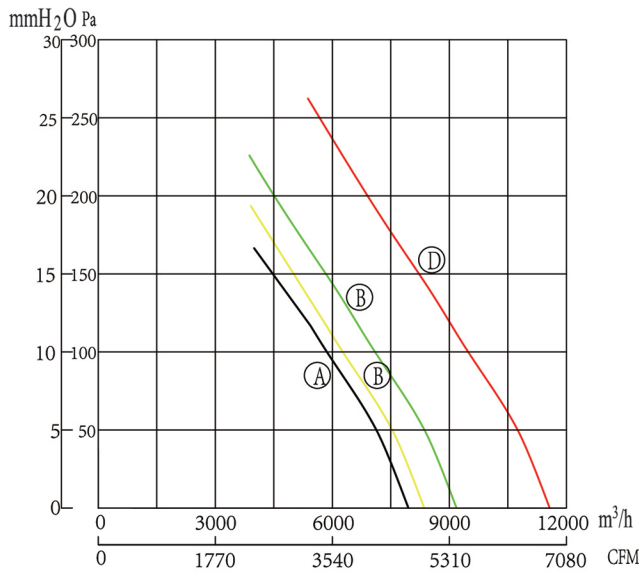


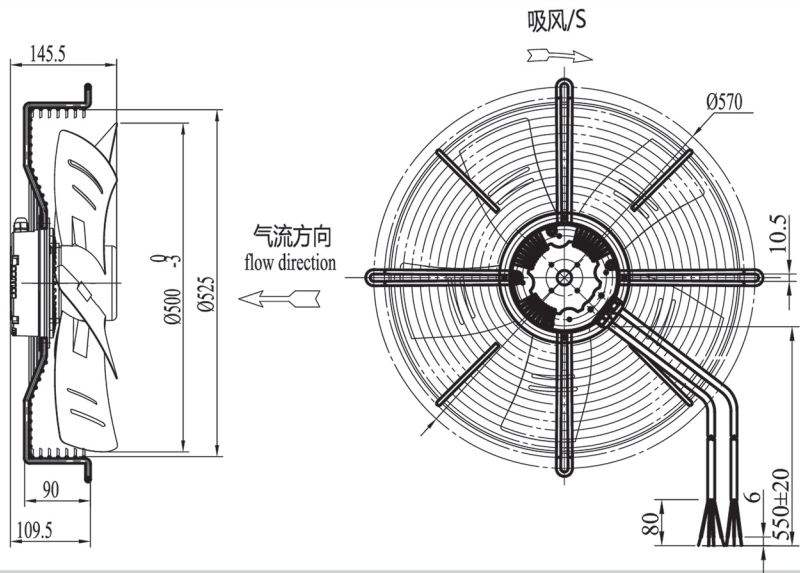


- 防护等级：IP54
 - 绝缘等级：F
 - 叶片数：5
 - 叶片材质：PP
 - 电机工作制：S1
 - 轴承：免维护深沟球轴承
 - 工作环境温度：-25°C - +60°C
 - 工作电压：200V-277V/1P 380V-480V/3P
 - 调速方式：0~10V或PWM控制
- Type of Protection: IP54
 - Insulation Class: F
 - Number of blades: 5
 - Blades: PP
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Perm.amb.temp.: -25°C - +60°C
 - Operating Voltage: 200V-277V/1P 380V - 480V/3P
 - Std. Control: 0~10V or PWM Control

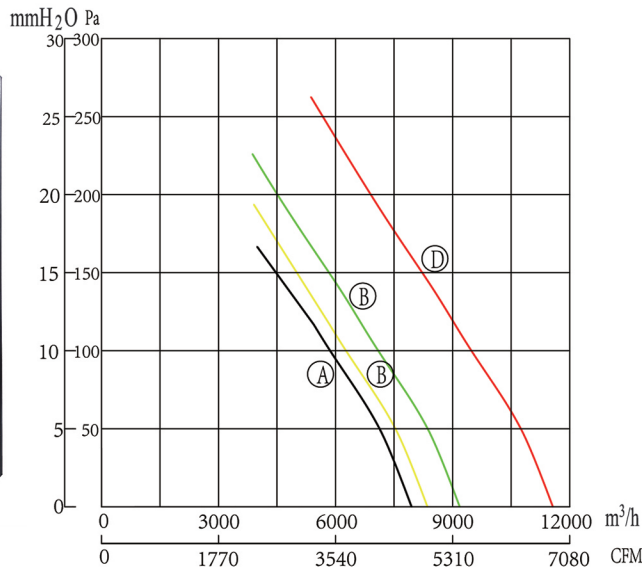

技术参数 Technical data									
型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
BY2EC500/102/III-1PSPK ①	230	50/60	2.2	500	1260	8200	120	15	70
BY6EC500/102/IX-3PSPK ②	400	50/60	1.0	630	1370	8400	150	2.7	72
BY2EC500/138/III-1PSPK ③	230	50/60	3.2	740	1440	9100	180	3.2	74
BY6EC500/138/IV-3PSK ④	400	50/60	2.1	1300	1770	11500	240	3.2	80

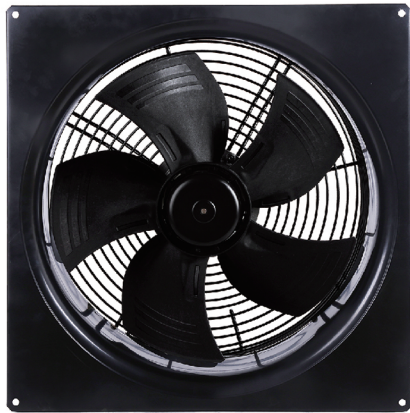

- 防护等级：IP54
 - 绝缘等级：F
 - 叶片数：5
 - 叶片材质：PP
 - 电机工作制：S1
 - 轴承：免维护深沟球轴承
 - 工作环境温度：-25°C - +60°C
 - 工作电压：200V-277V/1P 380V-480V/3P
 - 调速方式：0~10V或PWM控制
- Type of Protection: IP54
 - Insulation Class: F
 - Number of blades: 5
 - Blades: PP
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Perm.amb.temp.: -25°C - +60°C
 - Operating Voltage: 200V-277V/1P 380V - 480V/3P
 - Std. Control: 0~10V or PWM Control

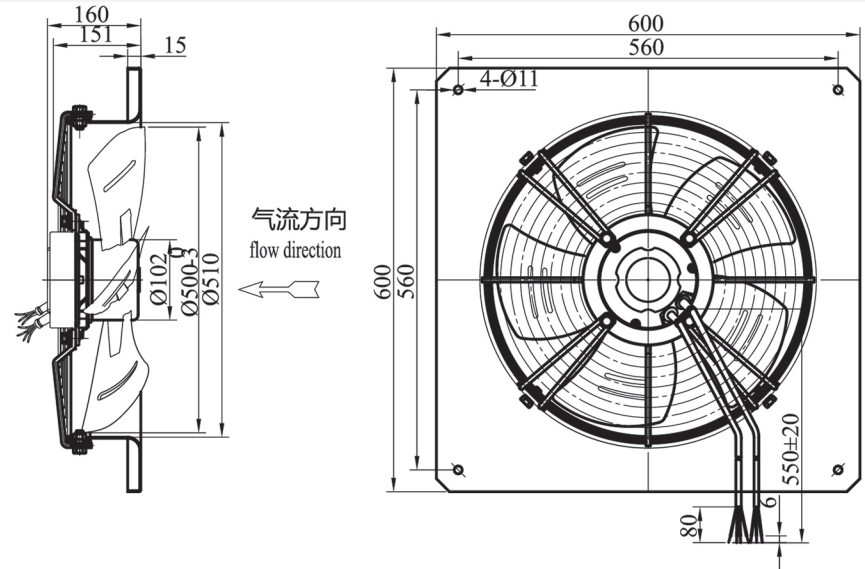

技术参数 Technical data									
型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
BY2EC500/102/III-1PSPK ①	230	50/60	2.2	500	1260	8200	120	15	70
BY6EC500/102/IX-3PSPK ②	400	50/60	1.0	630	1370	8400	150	2.7	72
BY2EC500/138/III-1PSPK ③	230	50/60	3.2	740	1440	9100	180	3.2	74
BY6EC500/138/IV-3PSK ④	400	50/60	2.1	1300	1770	11500	240	3.2	80