



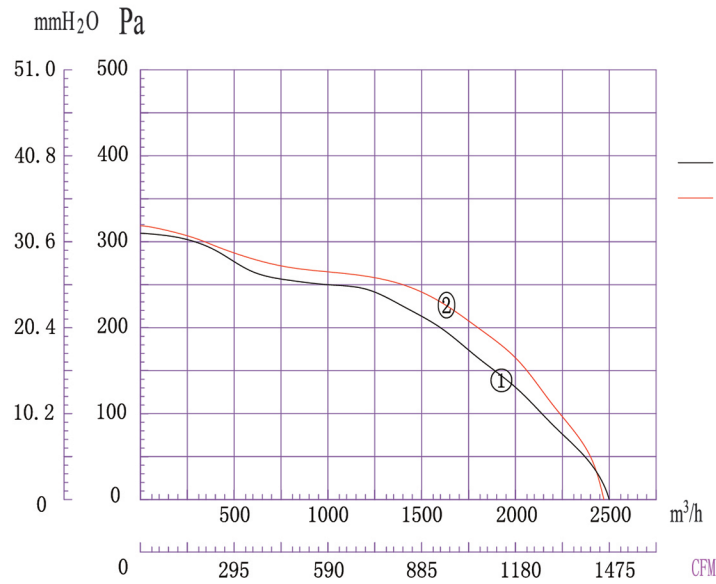


- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

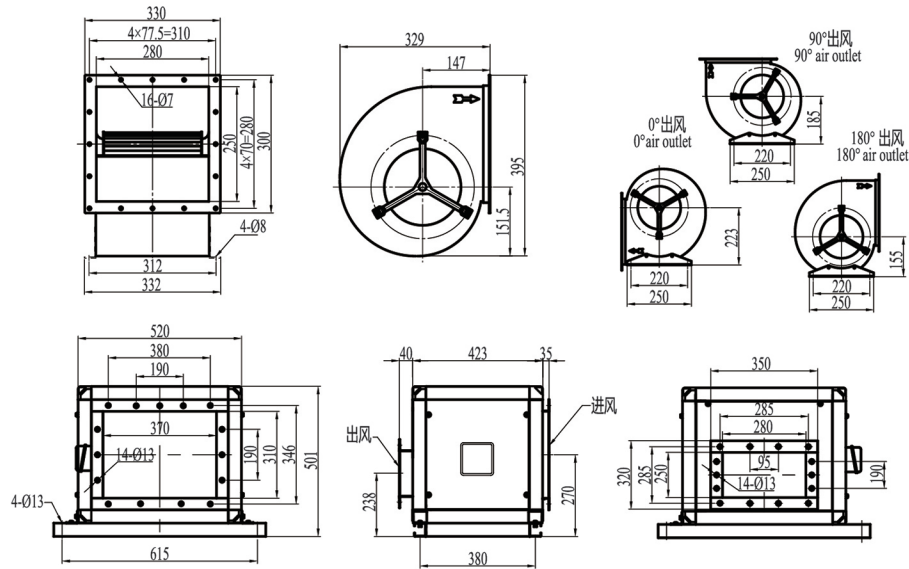


技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF(SJX)4D-200-QS1a	①	380	50	0.65	390	1210	64	—	2500	0	12
DYF(SJX)4E-200-QS2a	②	220	50	2.05	430	1050	61	12	2450	0	12

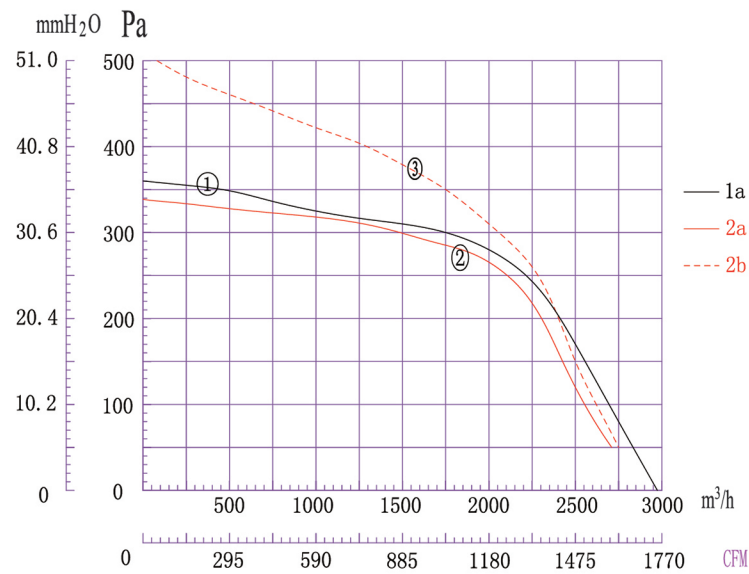

- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

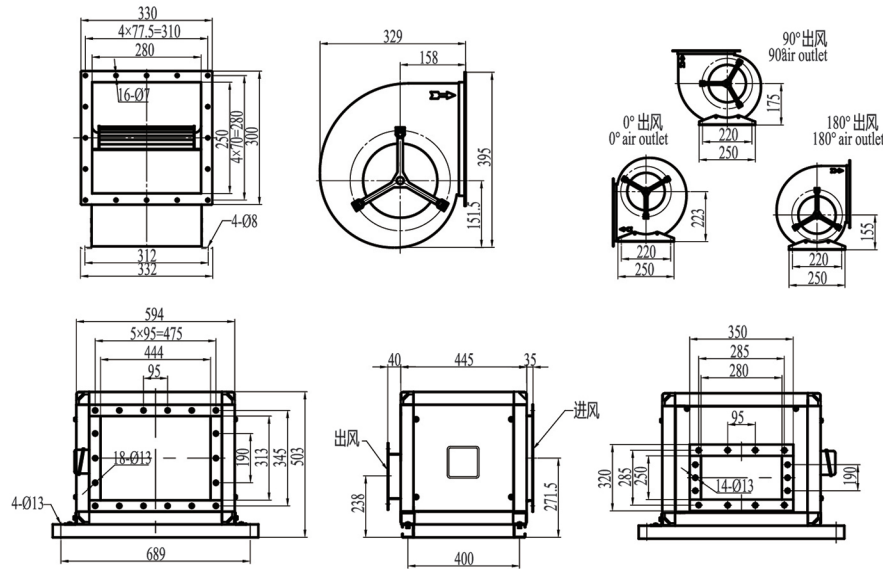

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF(SJX)4D-225A-QS1a	①	380	50	1.75	450	1320	65	—	2950	0	12.6
DYF(SJX)4E-225A-QS2a	②	220	50	2.55	625	1050	66	12	2800	0	
DYF(SJX)4E-225A-QS2b	③	230	60	4.6	1000	1650	63	18	2750	0	