


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

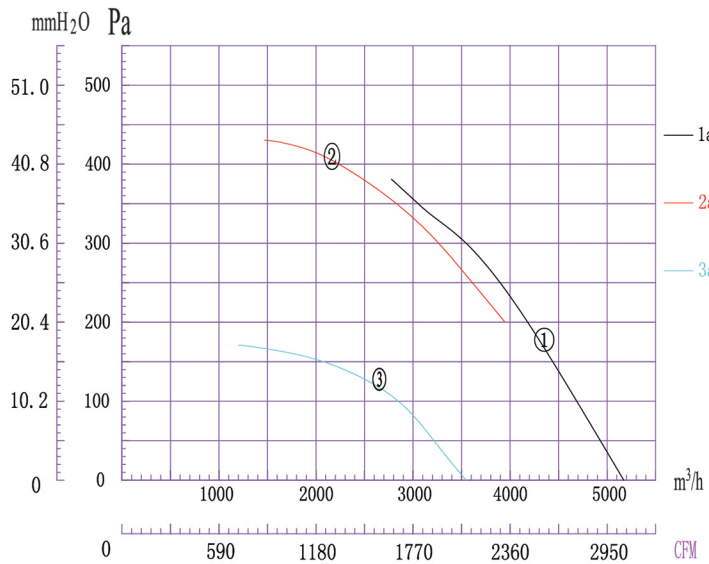

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

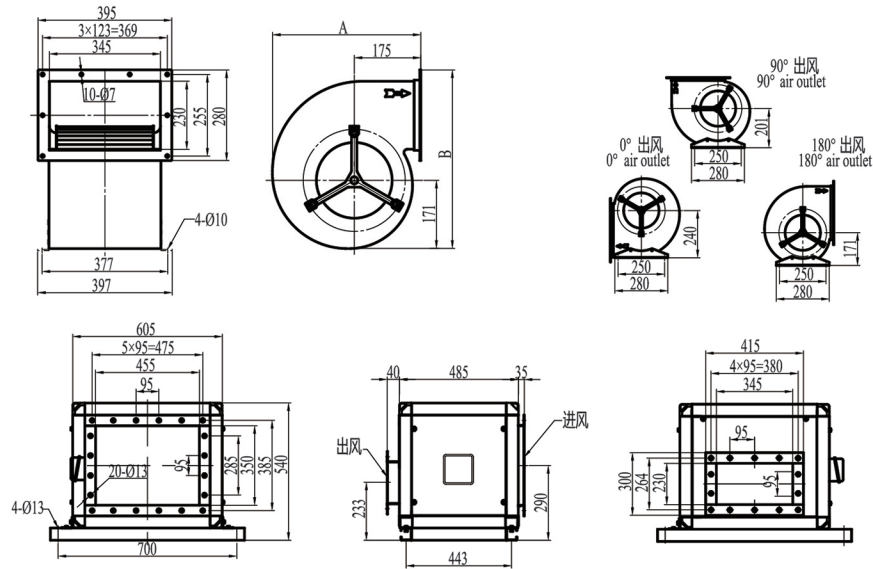

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg	A	B
DYF(SJX)4D-250C-QS1a	①	380	50	2.5	1380	1360	77	—	4200	0	22	374	426
DYF(SJX)4E-250C-QS2a	②	220	50	5.3	1000	1390	73	22	3750	0		382	413
DYF(SJX)6D-250C-QS3a	③	380	50	1.3	500	900	68	—	2850	0	21	374	426


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

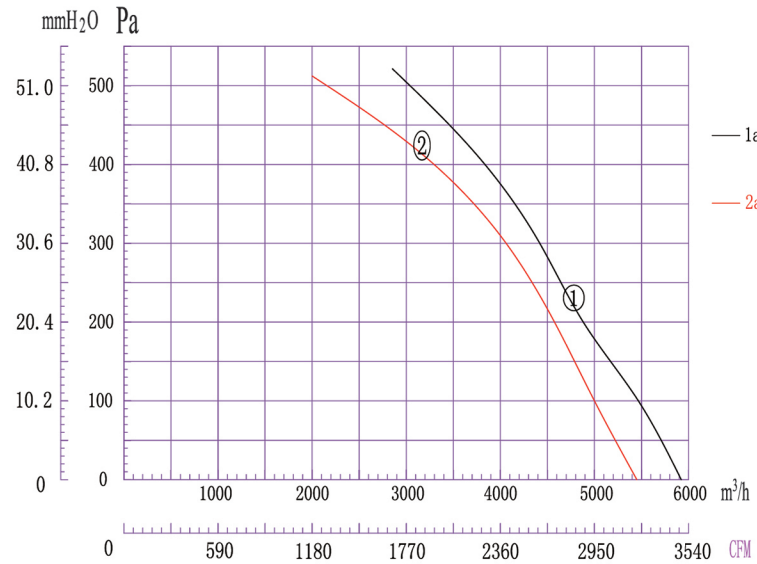

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

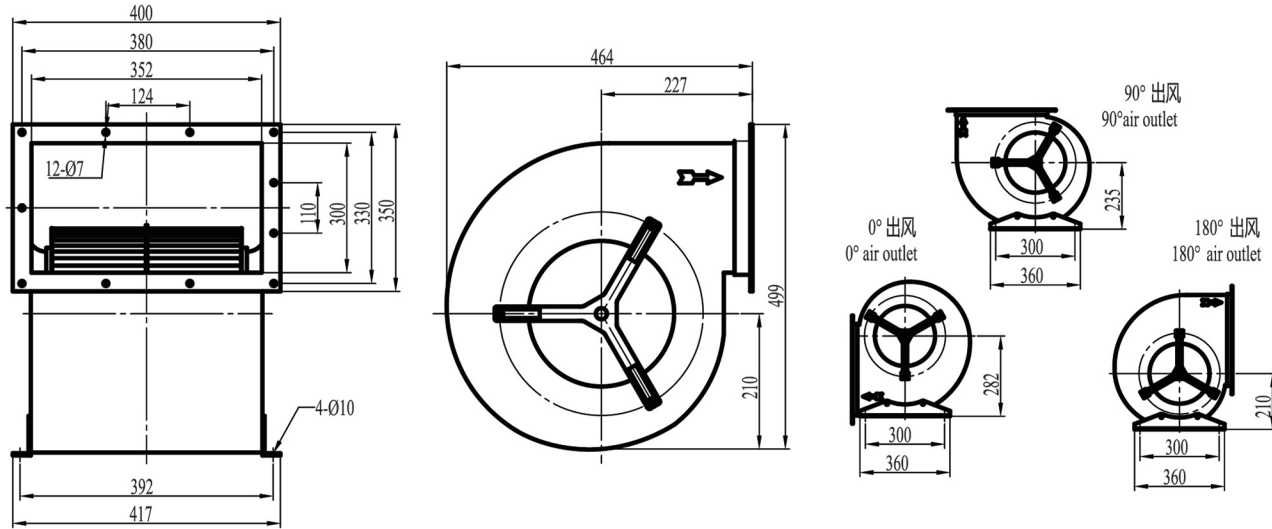

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Speed r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF4D-280-QS1a	①	380	50	3.3	1550	1420	75	—	5800	0	28
DYF4E-280-QS2a	②	220	50	6.4	1500	1330	73	35	5400	0	28