


AL FAN

EC CENTRIFUGAL FAN

EC SHADED-POLE MOTOR



AC AXIAL FAN

AC CENTRIFUGAL FAN

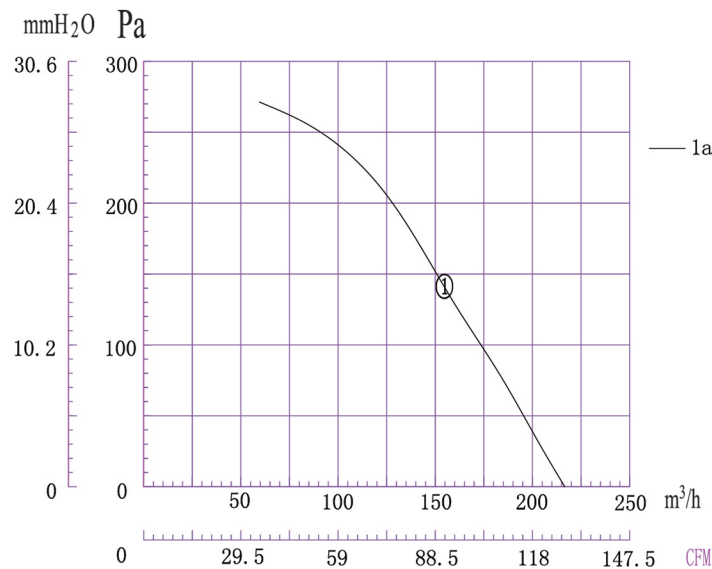


- 防护等级：IP54
- 绝缘等级：“B”“F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

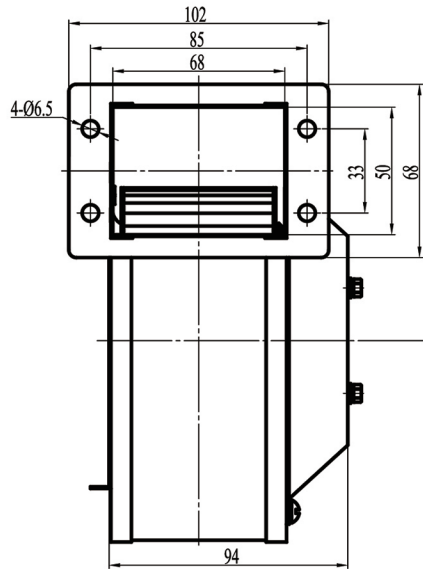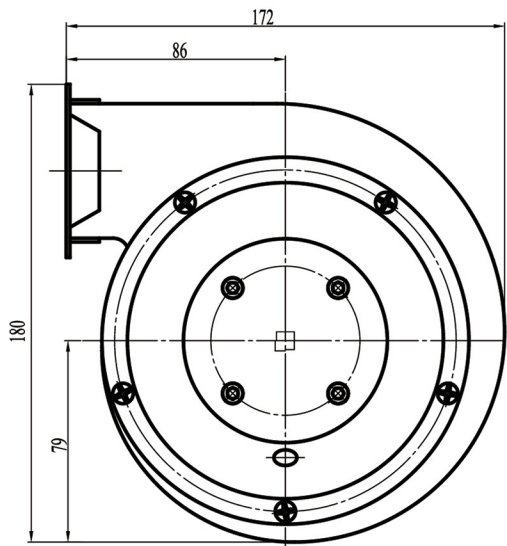




技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF2E-120-QD1a	①	220	50	0.3	58	2350	59	1.5	220	0	2.0

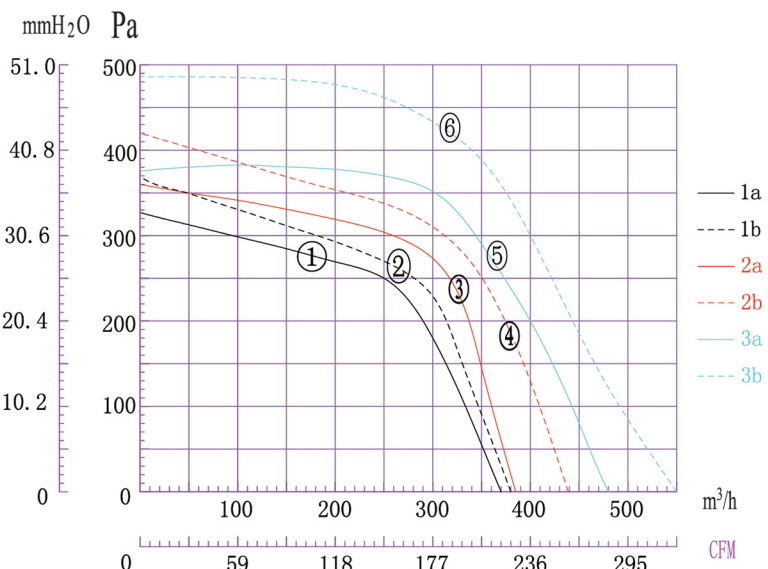

- 防护等级：IP54
- 绝缘等级：“B”“F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

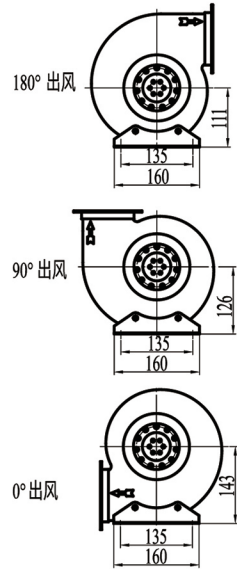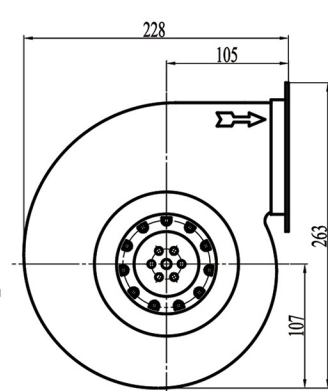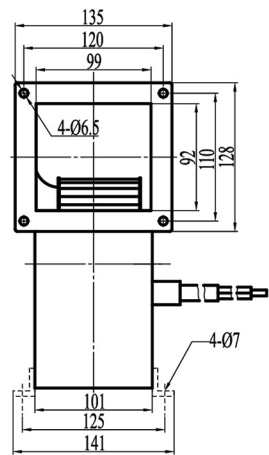

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF2E-140-QD1a	①	220	50	0.4	115	1500	60	2.5	370	0	2.6
DYF2E-140-QD1b	②	230	60	0.5	130	1600	62	3	380	0	2.9
DYF2E-140-QD2a	③	220	50	0.68	150	2300	64	6	385	0	2.9
DYF2E-140-QD2b	④	230	60	1.2	250	1600	67	6	435	0	2.9
DYF2E-140-QD3a	⑤	220	50	0.65	150	2400	73	6	480	0	2.9
DYF2E-140-QD3b	⑥	230	60	1.3	270	2800	76	6	560	0	2.9

AL FAN

EC CENTRIFUGAL FAN

EC SHADED-POLE MOTOR

AC AXIAL FAN

AC CENTRIFUGAL FAN