


离心风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

罩极电机
EC SHADED-POLE MOTOR


外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN

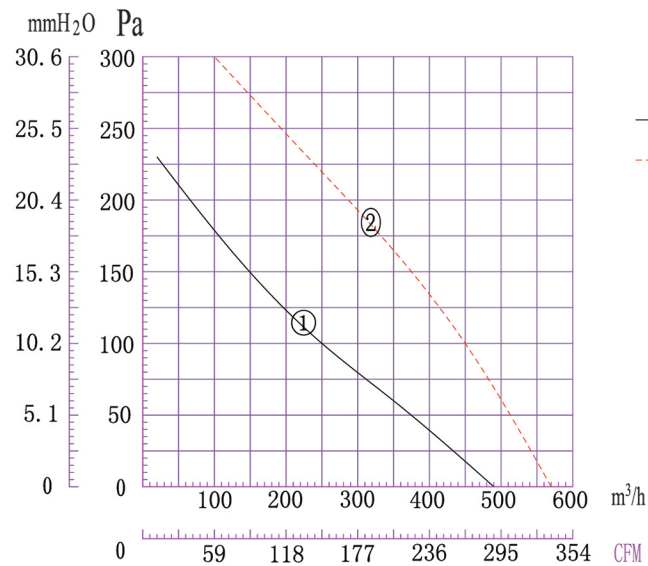


- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: PP
- 工作环境温度: -40°C - +60°C
- 叶轮结构: 整体式

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: PP
- Perm.amb.temp.: -40°C - +60°C
- Impeller structure: Unitary type

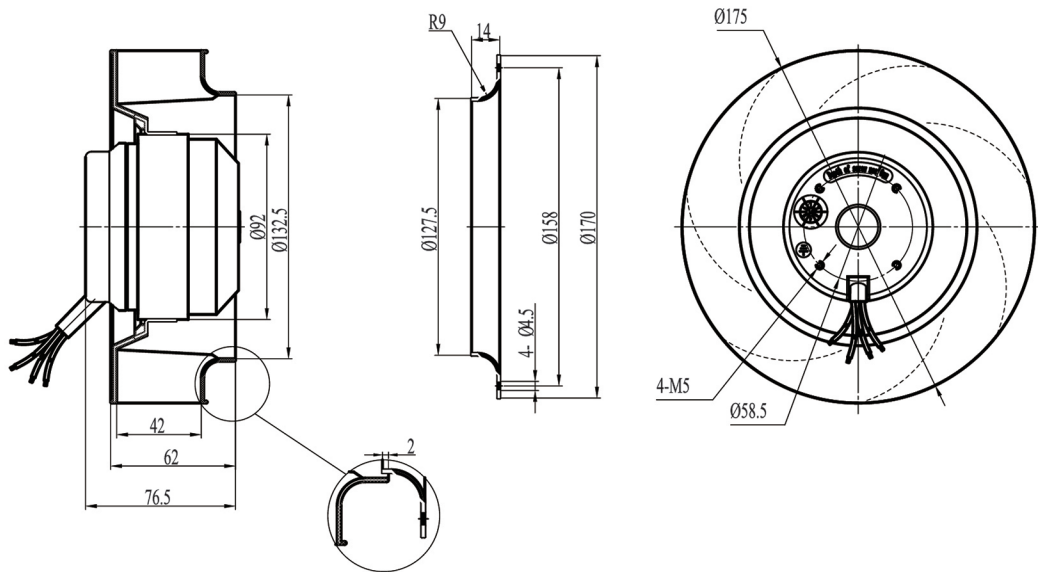


技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF2E-175-HW1a	①	220	50	0.31	70	2750	65	4	490	0	1.25
DYF2E-175-HW1b	②	230	60	0.36	84	3100	67	4	570	0	

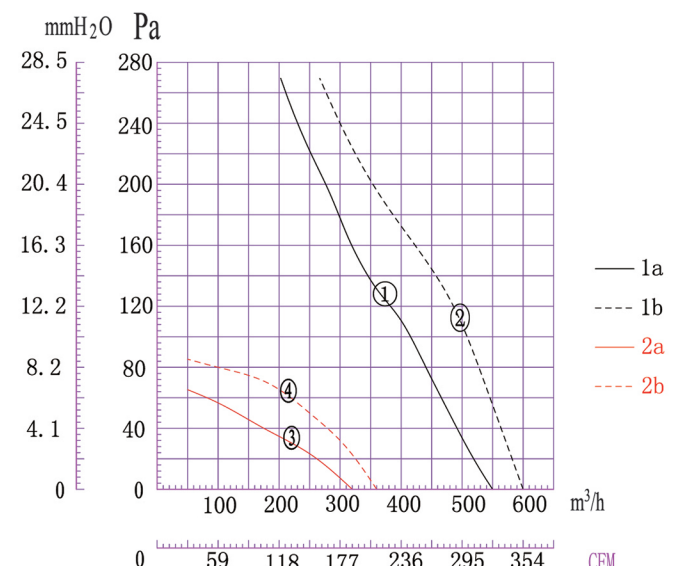

- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: PP
- 工作环境温度: -40°C - +60°C
- 叶轮结构: 组合式或整体式

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: PP
- Perm.amb.temp.: -40°C - +60°C
- Impeller structure: Combined type or Unitary type

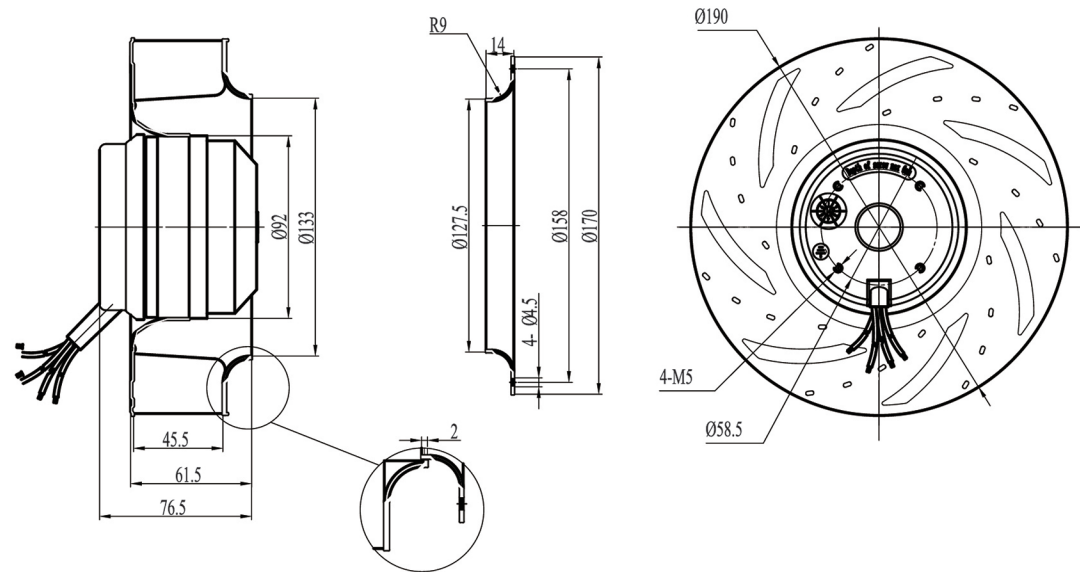

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF2E-190-HW1a	①	220	50	0.33	75	2640	66	4	540	0	1.9
DYF2E-190-HW1b	②	230	60	0.4	85	2700	68	4	600	0	
DYF4E-190-HW2a	③	220	50	0.14	30	1370	46	2	320	0	1.4
DYF4E-190-HW2b	④	230	60	0.19	40	1650	51	2	365	0	

轴流风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

罩极电机
EC SHADED-POLE MOTOR

外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN