


AL FAN
轴流风机

EC CENTRIFUGAL FAN
离心风机

EC SHADED-POLE MOTOR
罩极电机


AC AXIAL FAN
外转子轴流风机

AC CENTRIFUGAL FAN
离心风机

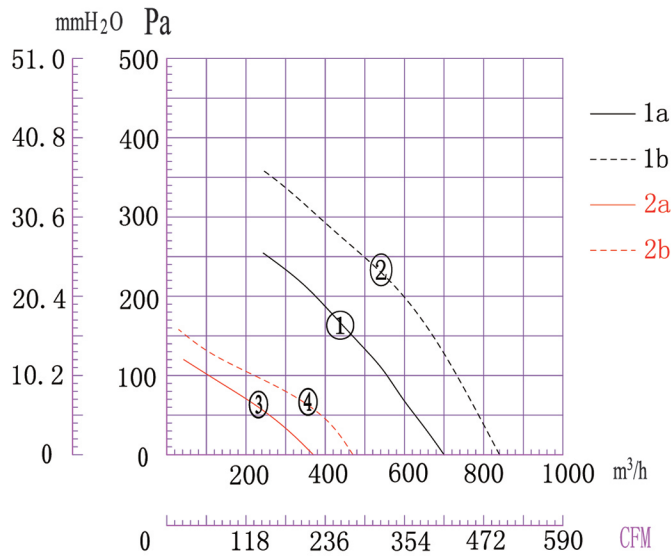


- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: PP
- 工作环境温度: -40°C - +60°C
- 叶轮结构: 整体式

- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: PP
- Perm.amb.temp.: -40°C - +60°C
- Impeller structure: Unitary type

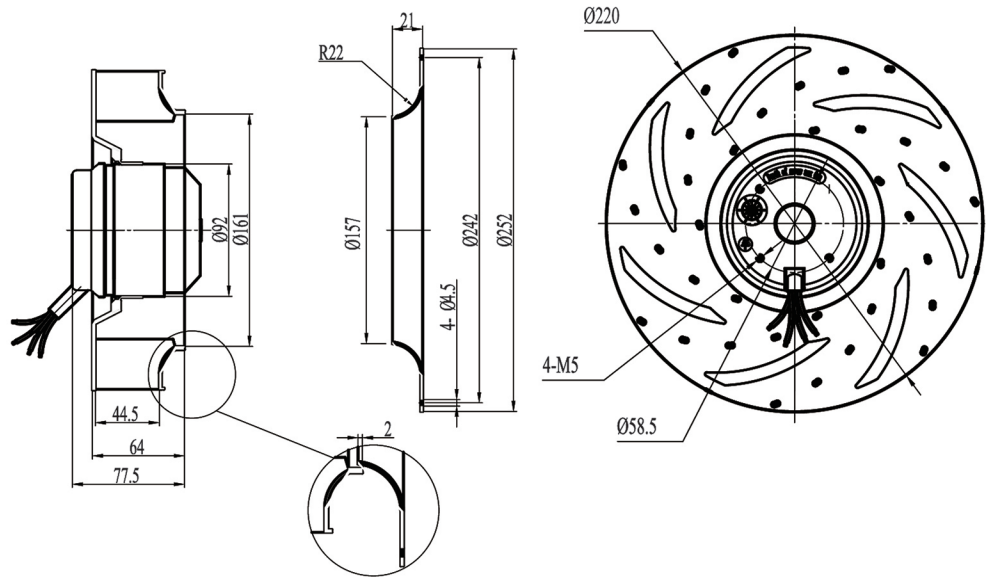


技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF2E-220-HW1a	①	220	50	0.48	110	2510	66	3	700	0	1.75
DYF2E-220-HW1b	②	230	60	0.58	135	2700	73	3	840	0	
DYF4E-220-HW2a	③	220	50	0.20	45	1450	55	2	370	0	1.75
DYF4E-220-HW2b	④	230	60	0.26	60	1700	60	2	470	0	

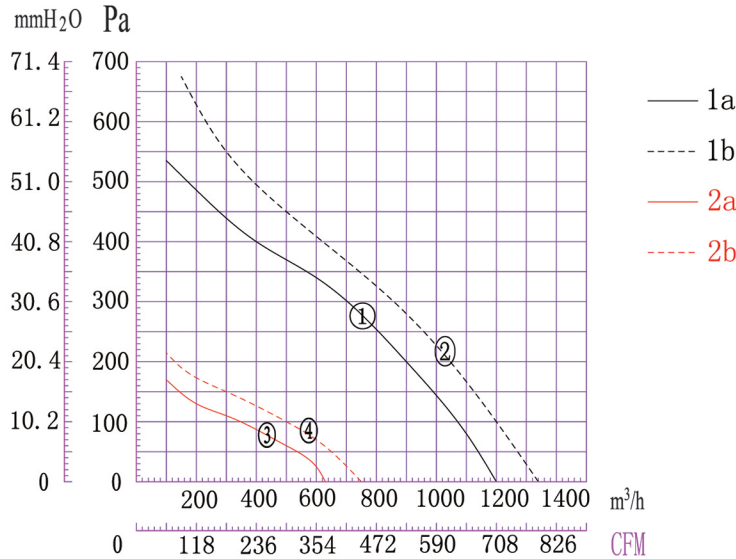

- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: PP
- 工作环境温度: -40°C - +60°C
- 叶轮结构: 组合式或整体式

- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: PP
- Perm.amb.temp.: -40°C - +60°C
- Impeller structure: Combined type or Unitary type

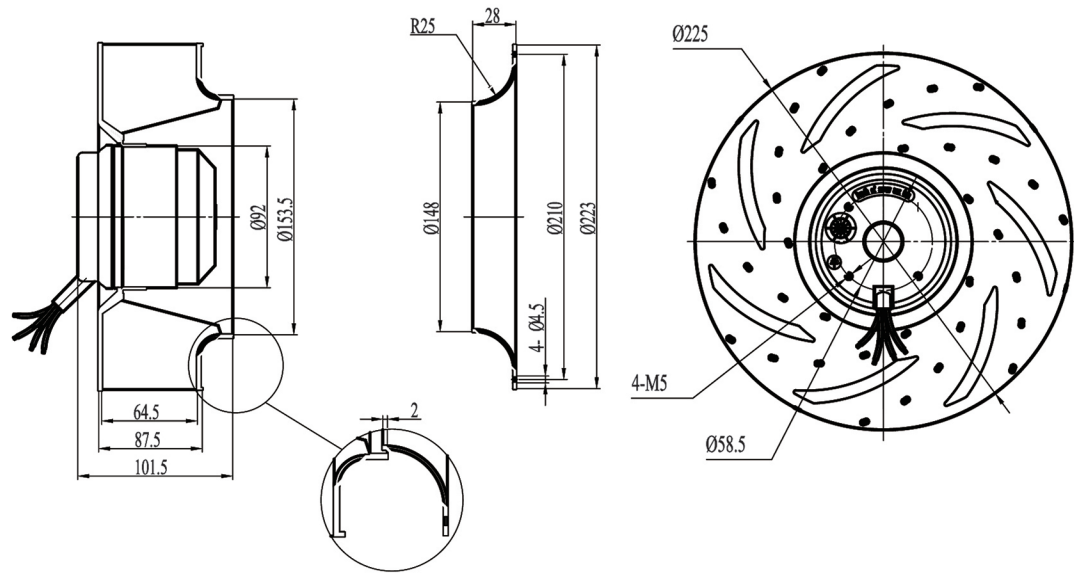

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF2E-225-HW1a	①	220	50	0.78	170	2580	70	6	1200	0	2.5
DYF2E-225-HW1b	②	230	60	0.95	200	3000	72	6	1340	0	
DYF4E-225-HW2a	③	220	50	0.27	54	1450	53	2	630	0	2.25
DYF4E-225-HW2b	④	230	60	0.32	64	1700	59	2	750	0	

AL FAN
轴流风机

EC CENTRIFUGAL FAN
离心风机

EC SHADED-POLE MOTOR
罩极电机

AC AXIAL FAN
外转子轴流风机

AC CENTRIFUGAL FAN
离心风机