


离心风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

罩极电机
EC SHADED-POLE MOTOR




外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN

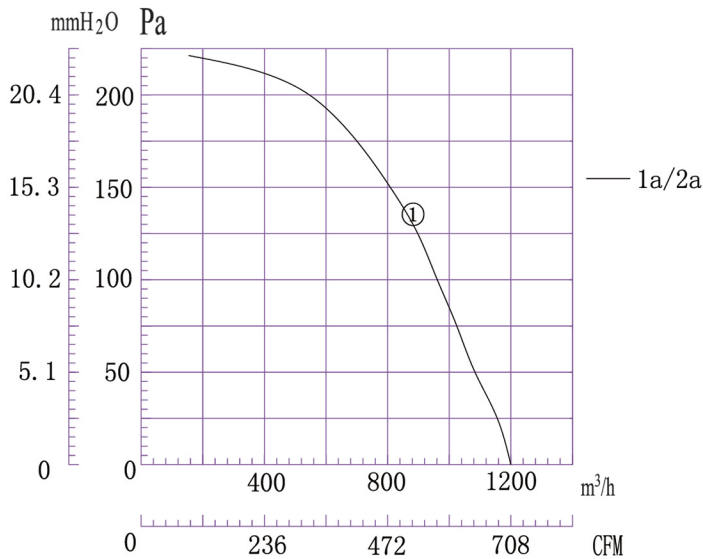


- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

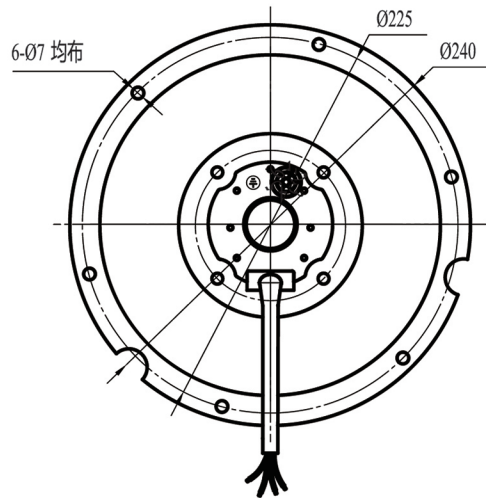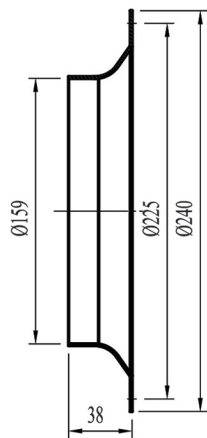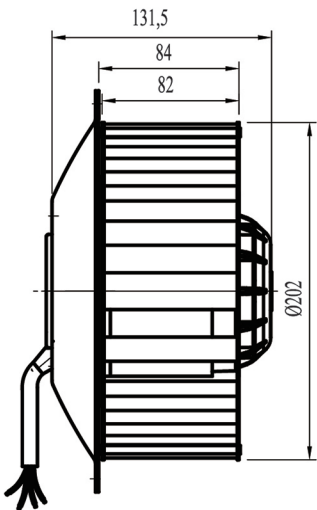




技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Rated Speed r/min	噪音 Noise level dB(A)	电容 Capacitor µF	最大风量 Max. Air Volume m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF4D-200-QW1a	①	380/220	50	0.63/1.09	330	1270	59	/	1200	0	5
DYF4E-200-QW2a	①	220	50	1.52	330	1280	59	8	1200	0	5

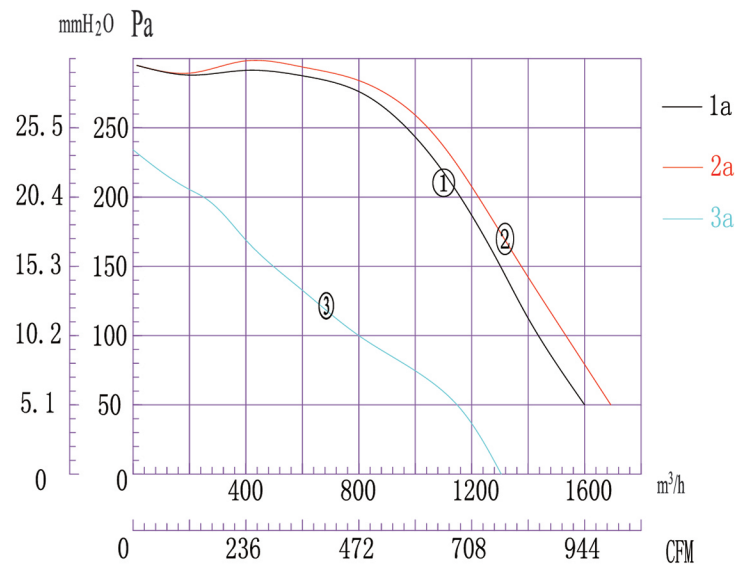

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

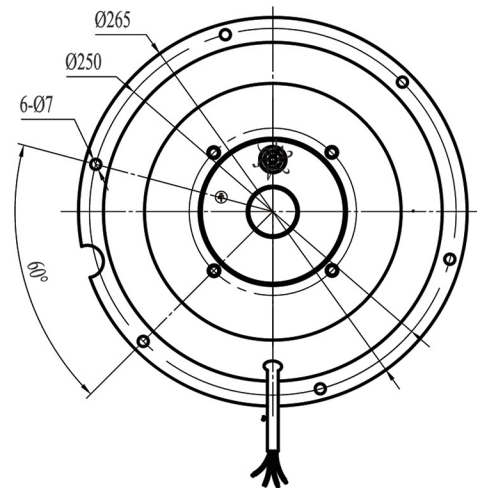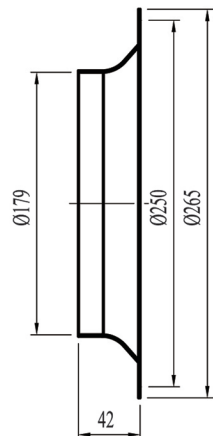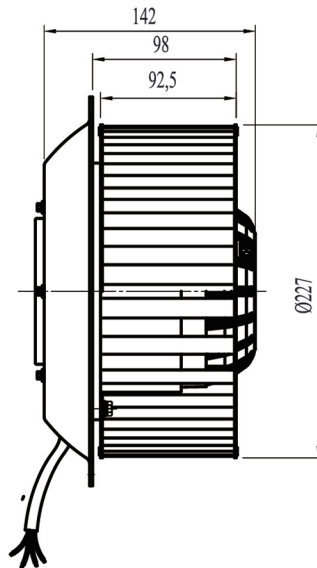

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Rated Speed r/min	噪音 Noise level dB(A)	电容 Capacitor µF	最大风量 Max. Air Volume m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF4D-225-QW1a	①	380/220	50	0.82/1.43	490	1300	65	/	1600	50	7.5
DYF4E-225-QW2a	②	220	50	2.3	510	1320	65	15	1710	50	7.5
DYF6D-225-QW3a	③	380/220	50	0.81/1.4	300	930	59	/	1300	0	7.5

离心风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

罩极电机
EC SHADED-POLE MOTOR

外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN