



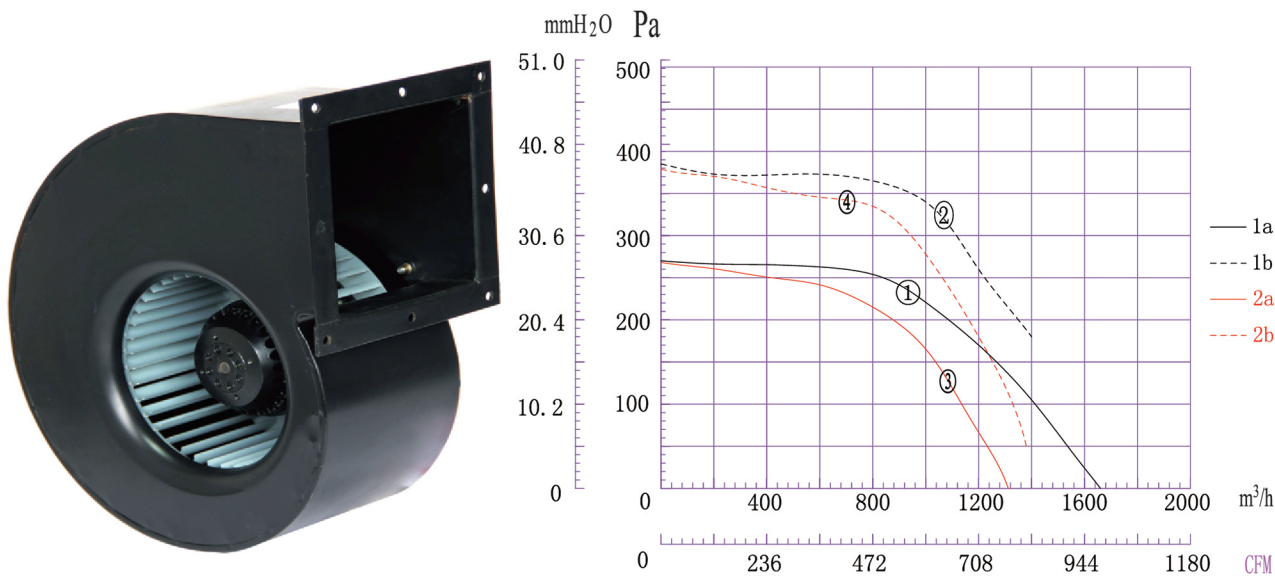


- 防护等级: IP54
- 绝缘等级: "B" "F"
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: "B" "F"
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

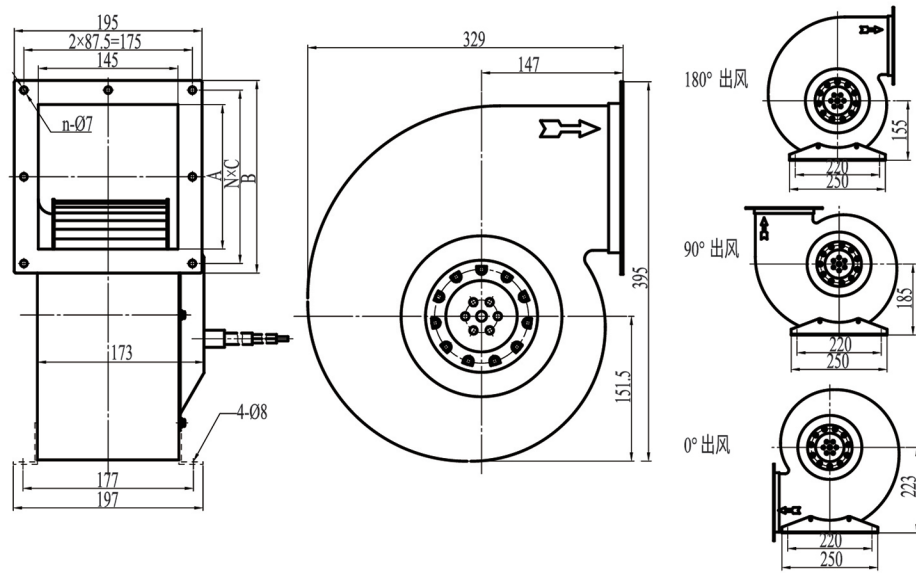


技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg	A	B	C	N	n
DYF4D-200-QD1a	①	380	50	0.65	350	1350	72	—	1660	0	7.2	250	300	93	3	10
DYF4D-200-QD1b	②	400	60	0.65	350	1550	70	—	1400	0	—	—	—	—	—	—
DYF4E-200-QD2a	③	220	50	1.6	320	1330	70	6	1350	0	7.2	150	200	90	2	8
DYF4E-200-QD2b	④	230	60	1.75	385	1600	69	8	1380	0	—	—	—	—	—	—

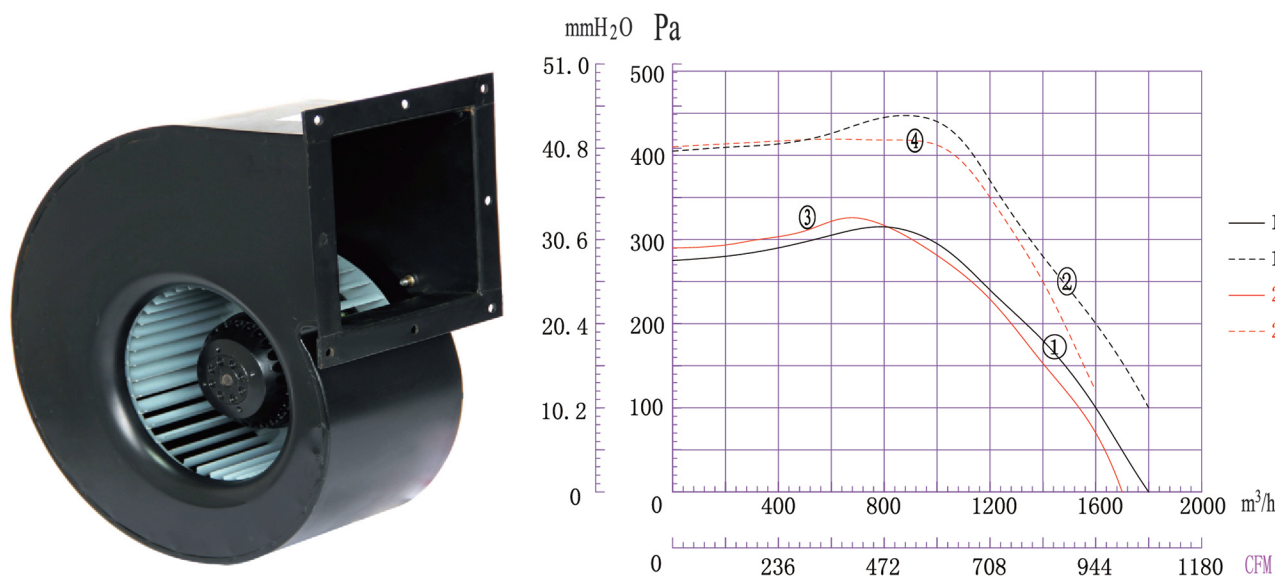

- 防护等级: IP54
- 绝缘等级: "B" "F"
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: "B" "F"
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

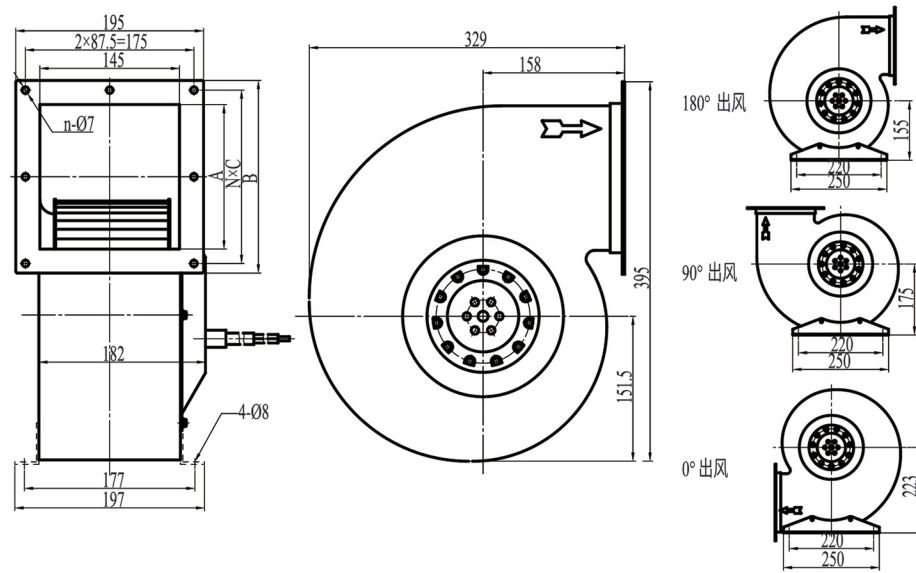

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg	A	B	C	N	n
DYF4D-225-QD1a	①	380	50	0.84	460	1310	76	—	1800	0	10.1	250	300	93	3	10
DYF4D-225-QD1b	②	400	60	1.0	500	1450	74	—	1800	0	—	—	—	—	—	—
DYF4E-225-QD2a	③	220	50	2.55	495	1330	74	8	1700	0	10.3	150	200	90	2	8
DYF4E-225-QD2b	④	230	60	1.77	380	1700	73	8	1600	0	—	—	—	—	—	—