


离心风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN

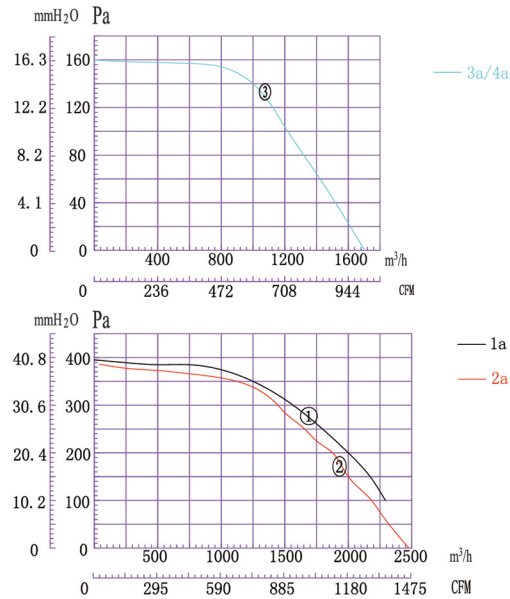


- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

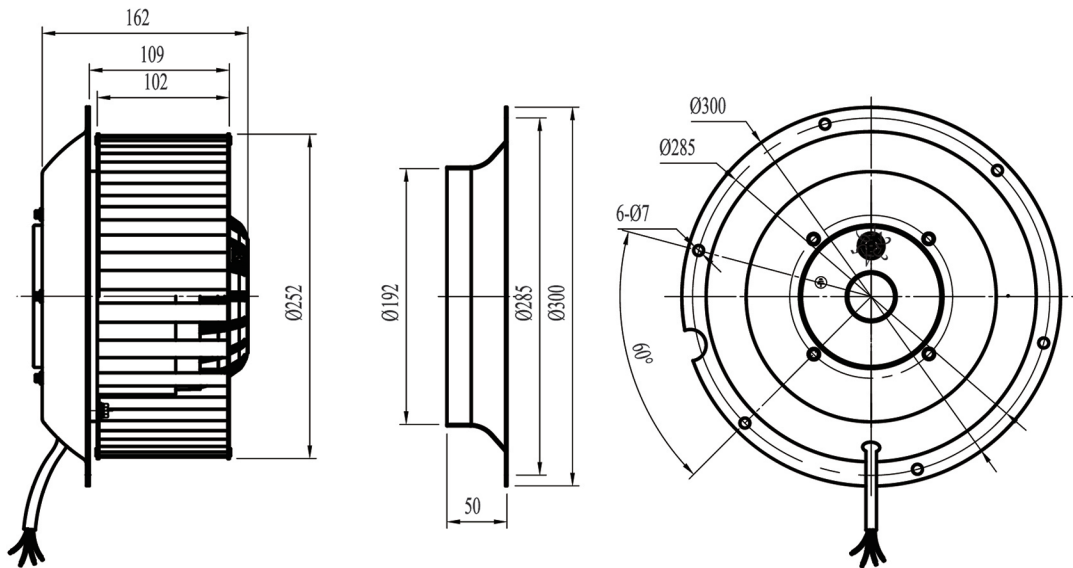


技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Rated Speed r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Max. Air Volume m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF4D-250-QW1a	①	380/220	50	1.8/3.1	870	1400	72	/	2300	100	10
DYF4E-250-QW2a	②	220	50	4.1	900	1330	72	25	2670	0	10
DYF6D-250-QW3a	③	380/220	50	0.81/1.4	320	910	62	/	1545	0	10
DYF6E-250-QW4a	③	220	50	1.6	320	900	62	10	1545	0	10

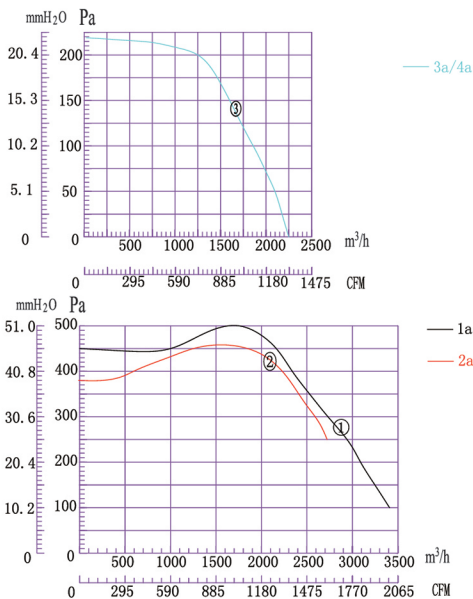

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

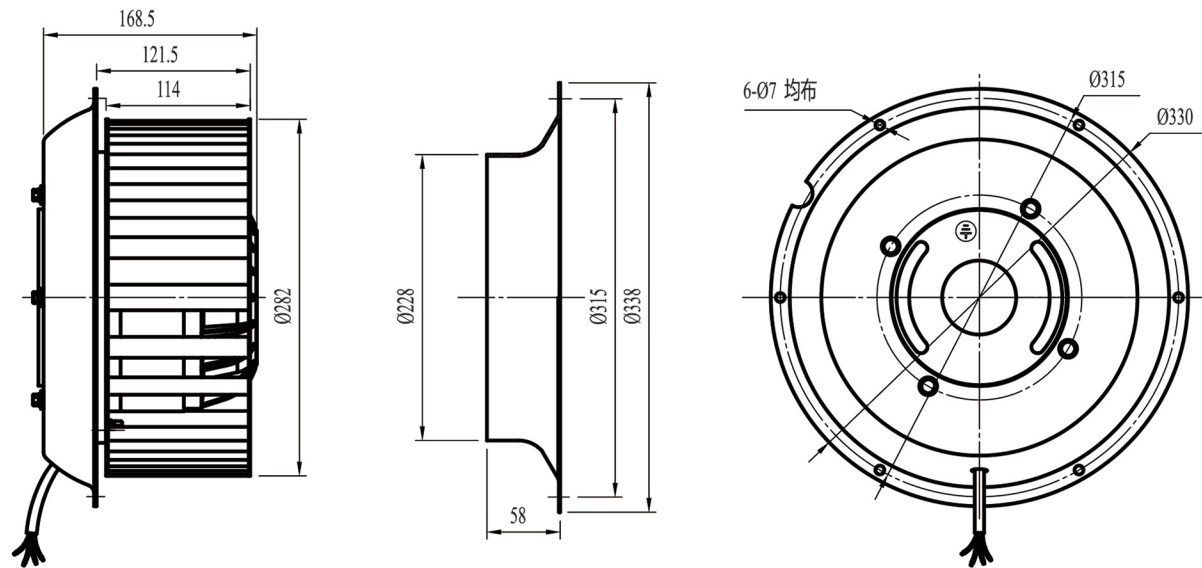

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Rated Speed r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Max. Air Volume m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF4D-280-QW1a	①	380/220	50	3.2/5.4	1700	1360	77	/	3400	100	15
DYF4E-280-QW2a	②	220	50	7.3	1600	1360	77	30	2800	250	15
DYF6D-280-QW3a	③	380/220	50	0.88/1.48	450	900	65	/	2250	0	15
DYF6E-280-QW4a	③	220	50	2.5	450	900	65	15	2250	0	15

轴流风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN