


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

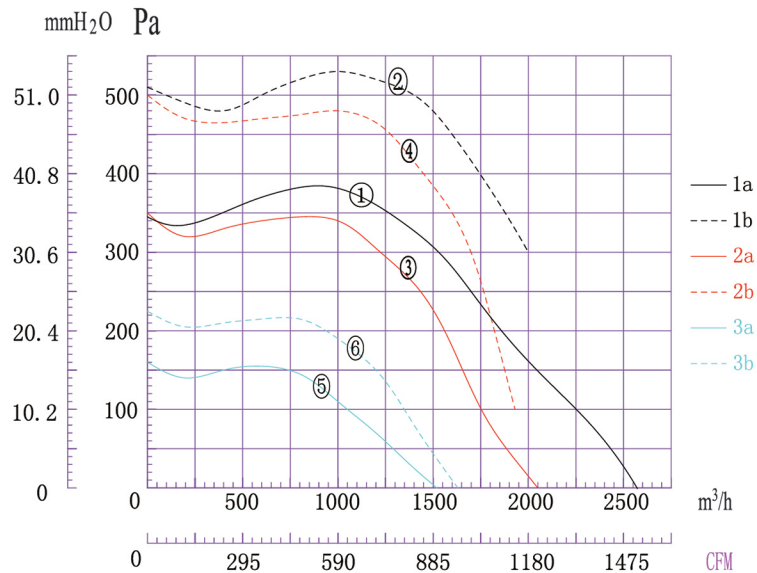

- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

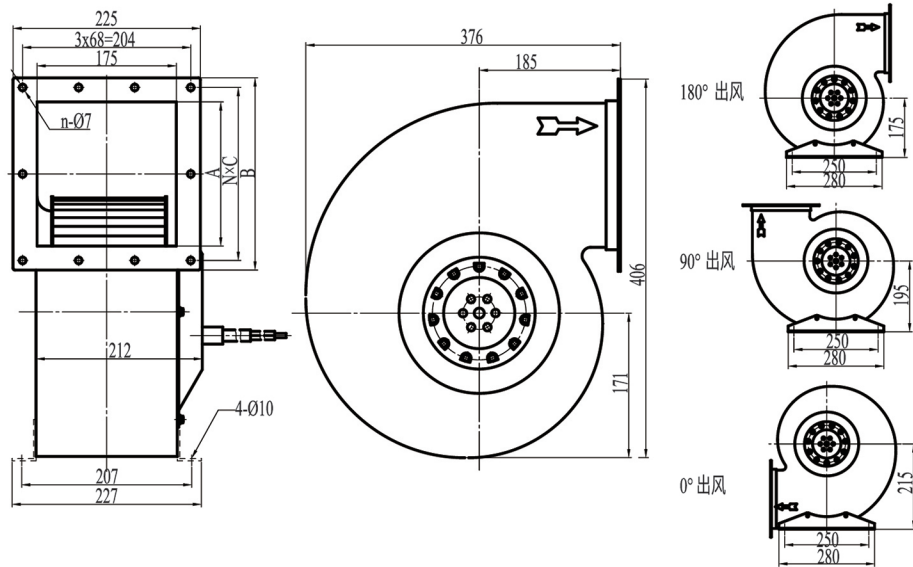

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg	A	B	C	N	n
DYF4D-250-QD1a	①	380	50	1.45	700	1300	78	—	2600	0	14	260	310	72.5	4	14
DYF4D-250-QD1b	②	400	60	2	800	1550	74	—	1960	0	14	260	310	72.5	4	14
DYF4E-250-QD2a	③	220	50	3.15	700	1300	75	12	2030	0	14	165	215	65	3	12
DYF4E-250-QD2b	④	230	60	3.8	800	1550	76	15	1900	0	14	165	215	65	3	12
DYF6E-250-QD3a	⑤	220	50	1.3	250	900	67	8	1500	0	12	165	215	65	3	12
DYF6E-250-QD3b	⑥	230	60	1.6	300	950	68	8	1610	0	12	165	215	65	3	12


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

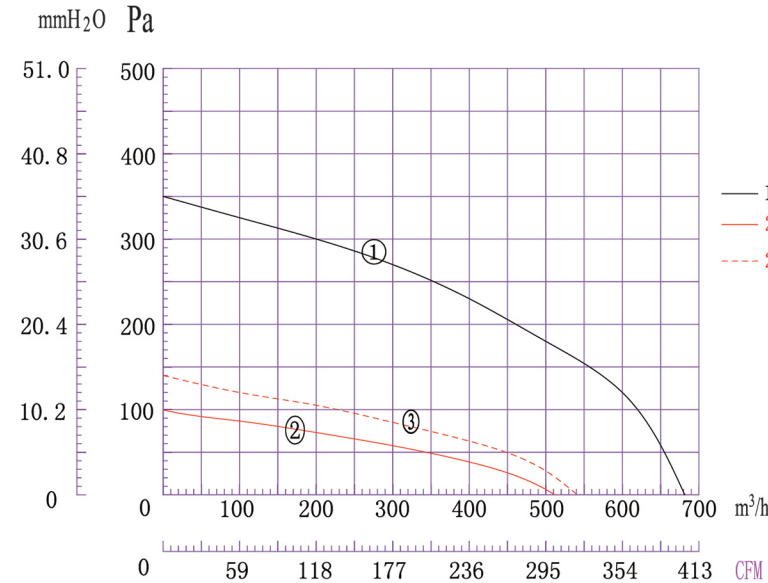

- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

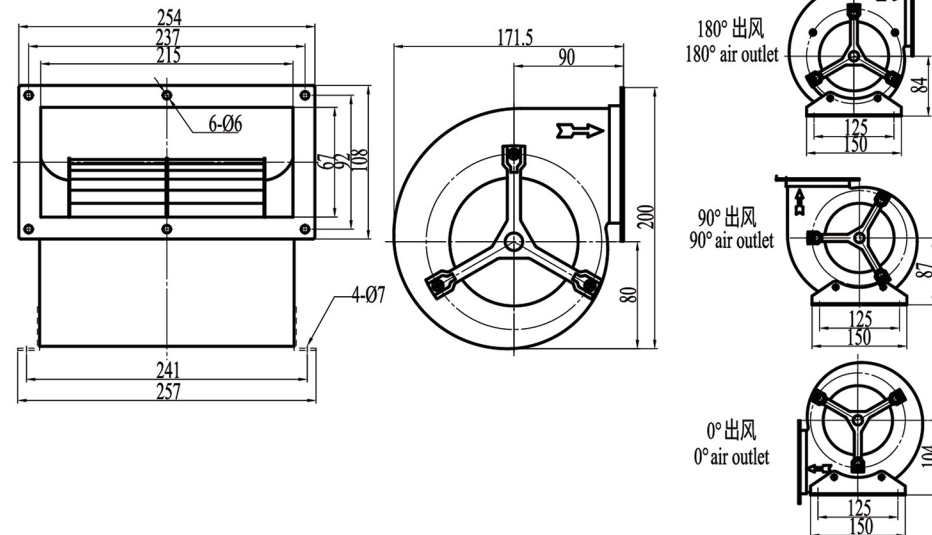

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF2E-133A-QS1a	①	220	50	1.3	280	1950	60	8	680	0	3.7
DYF4E-133A-QS2a	②	220	50	0.35	70	1380	53	2	510	0	2.9
DYF4E-133A-QS2b	③	230	60	0.4	90	1650	55	2	540	0	2.9