


离心风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

罩极电机
EC SHADED-POLE MOTOR



AC 外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN

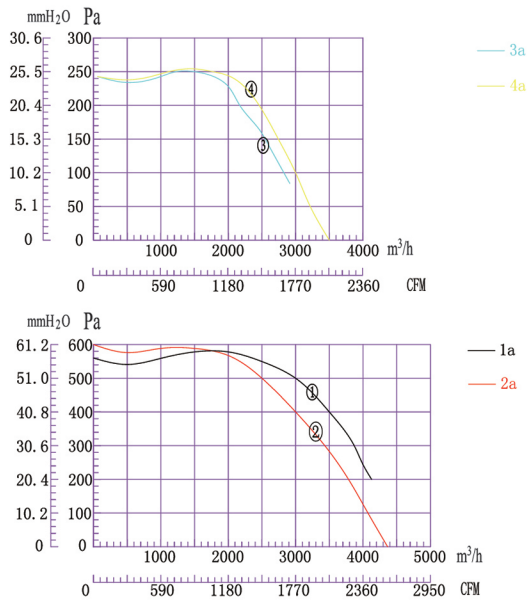


- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

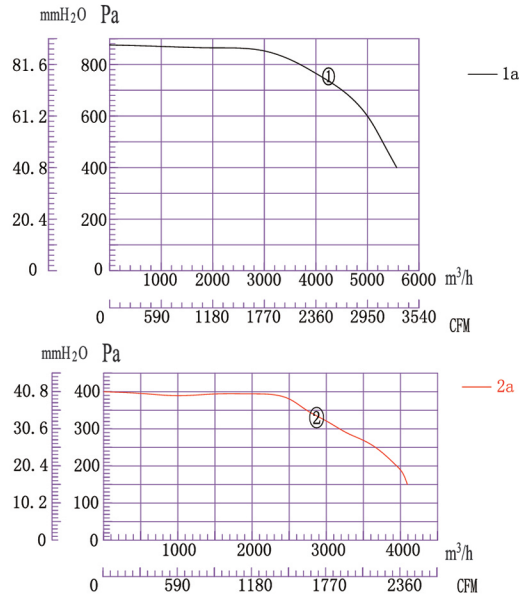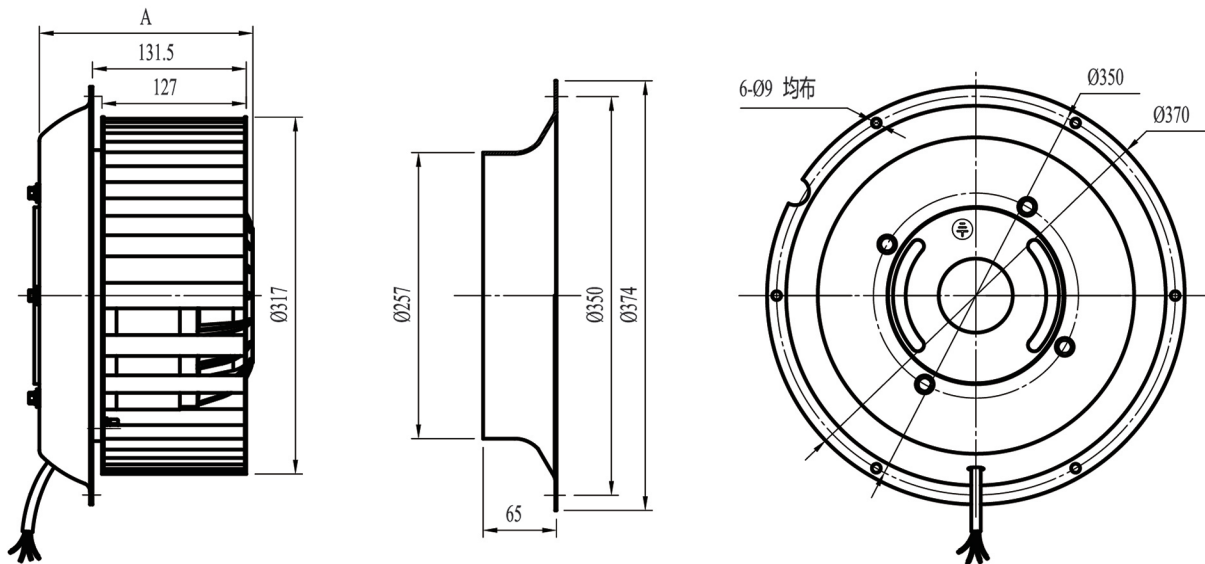

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

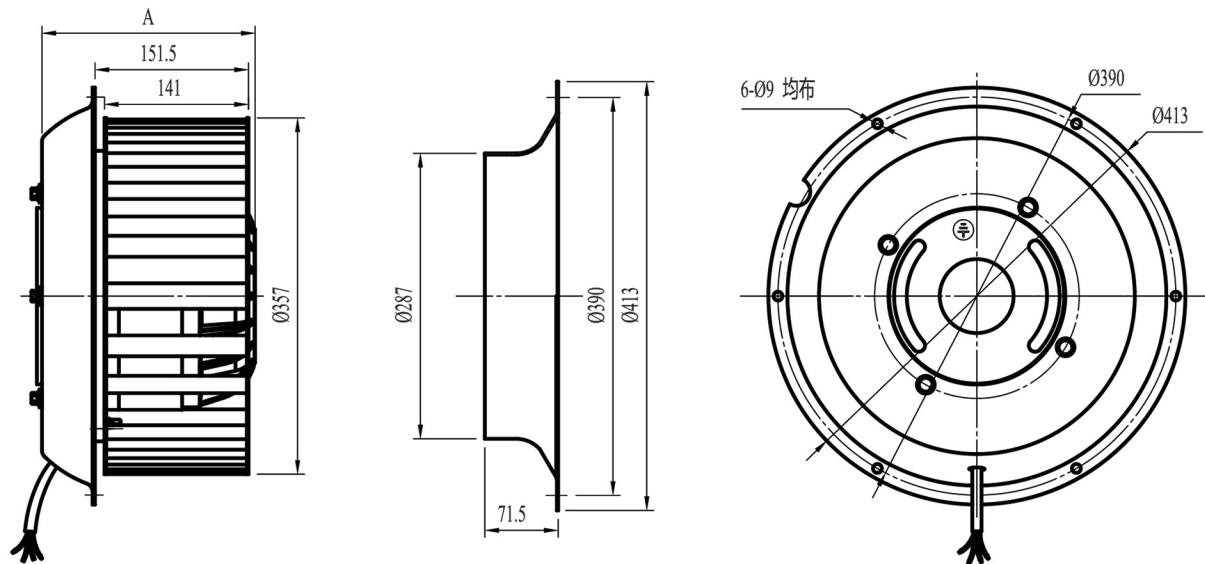

技术参数 Technical data													
型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Rated Speed r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Max.Air Volume m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg	A	
DYF4D-315-QW1a	①	380/220	50	4.0/6.9	2200	1360	80	/	4200	200	20	192.5	
DYF4E-315-QW2a	②	220	50	7.3	2300	1360	80	30	4300	0	25	212.5	
DYF6D-315-QW3a	③	380/220	50	1.5/2.6	780	940	68	/	2250	90	15	172.5	
DYF6E-315-QW4a	④	220	50	3.6	720	870	68	20	2250	0	15	172.5	

轴流风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

罩极电机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN