


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR




AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

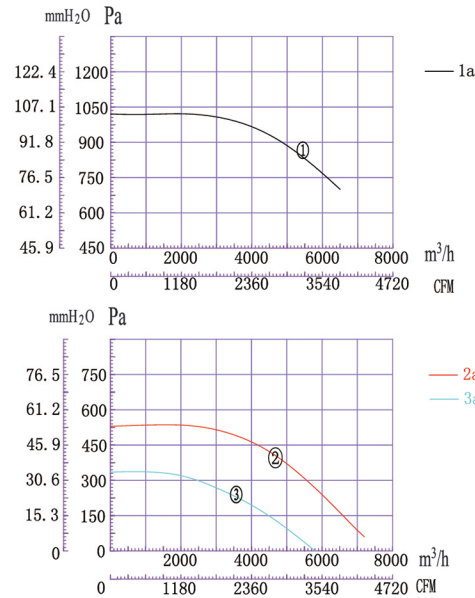



- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

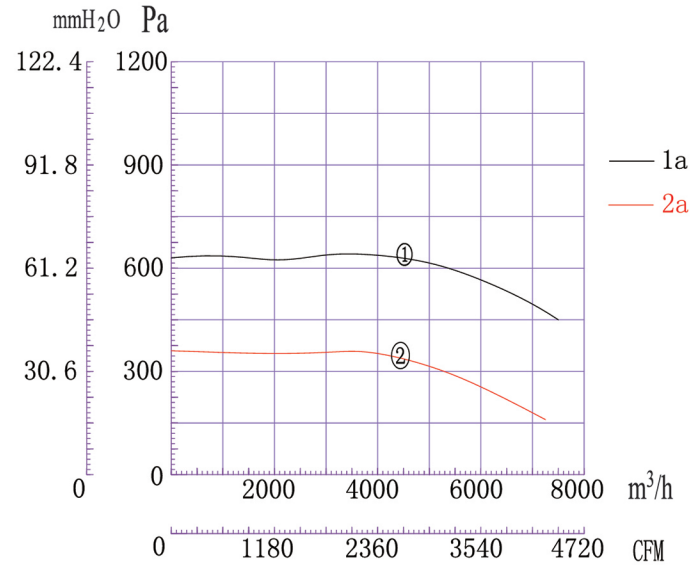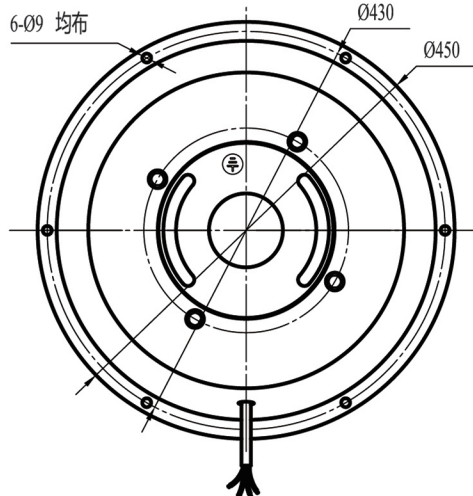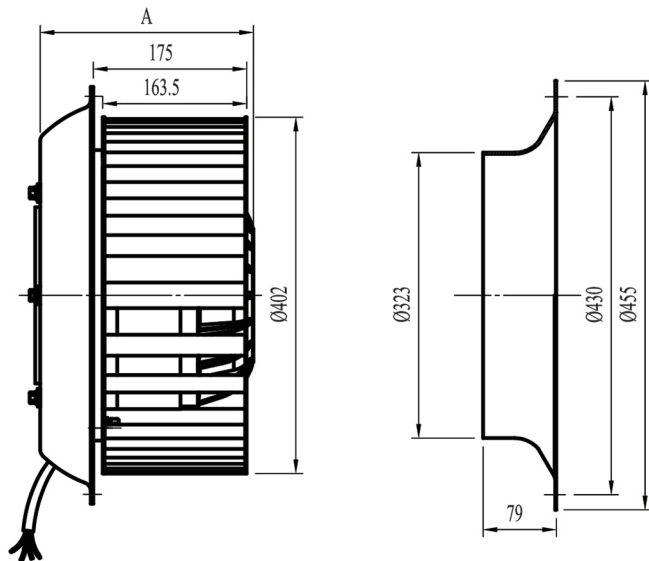

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：镀锌板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

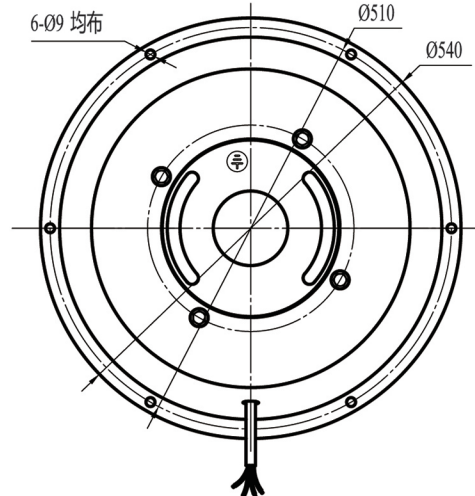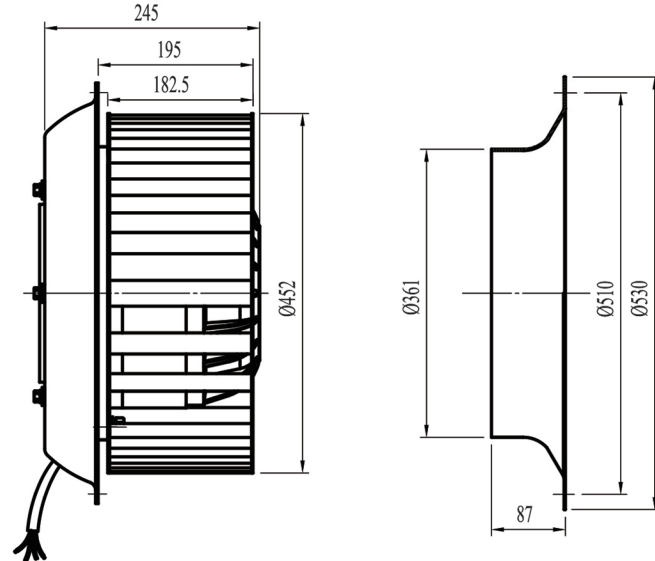

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Rated Speed r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Max.Air Volume m ³ /h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF6D-450-QW1a	①	380/220	50	5.9/10.2	3500	930	74	/	7500	450	36
DYF8D-450-QW2a	②	380/220	50	4.1/7.1	2000	680	68	/	7200	160	36

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Rated Speed r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Max.Air Volume m ³ /h	静压 Static Pressure ≥Pa	净重 N.W. Kg	A
DYF4D-400-QW1a	①	380/220	50	8.0/13.9	4800	1400	82	/	6500	700	39	230
DYF6D-400-QW2a	②	380/220	50	4.8/8.4	2800	870	74	/	7100	60	34	200
DYF8D-400-QW3a	③	380/220	50	3.7/6.4	1700	700	65	/	5800	0	34	200

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN