


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

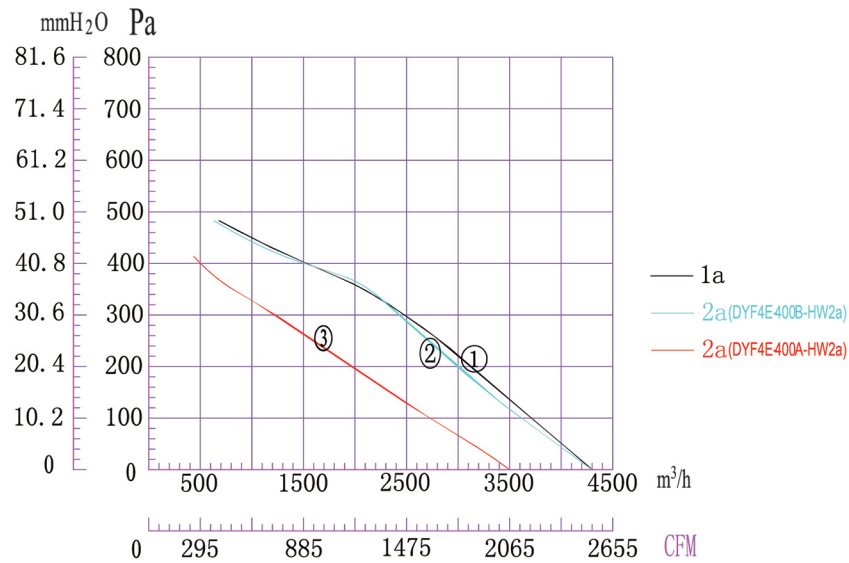

- 防护等级: IP54
- 绝缘等级: "B" "F"
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 铝合金
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: "B" "F"
- Mode of Operation: S1
- Bearings: Maintenance-free bearings
- Blades: Aluminium alloy sheet
- Perm.amb.temp.: -40°C - +60°C

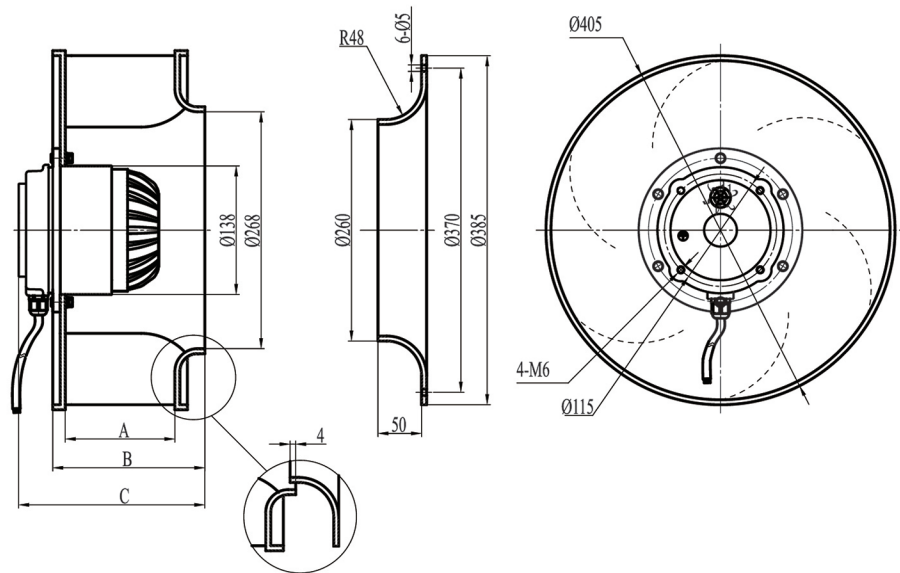

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor uF	最大风量 Air flow/max m ³ /h	静压 Static pressure ≥Pa	净重 N.W. Kg	A	B	C
DYF4D-400B-HW1a	①	380	50	1.1	500	1390	72	—	4300	0	7.2	140	193	229.5
DYF4E-400B-HW2a	②	220	50	2.42	525	1400	72	15	4300	0	7.2			
DYF4E-400A-HW3a	③	220	50	2.0	420	1400	68	15	3500	0	5.5	90	142	178.5


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

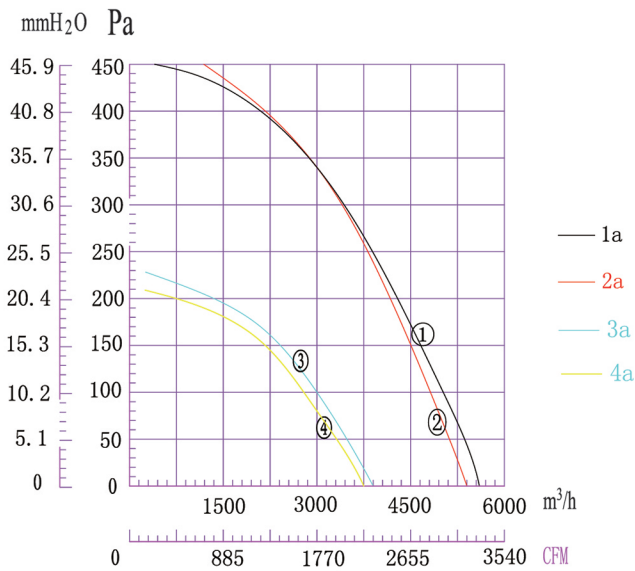

- 防护等级: IP54
- 绝缘等级: "B" "F"
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 铝合金
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: "B" "F"
- Mode of Operation: S1
- Bearings: Maintenance-free bearings
- Blades: Aluminium alloy sheet
- Perm.amb.temp.: -40°C - +60°C

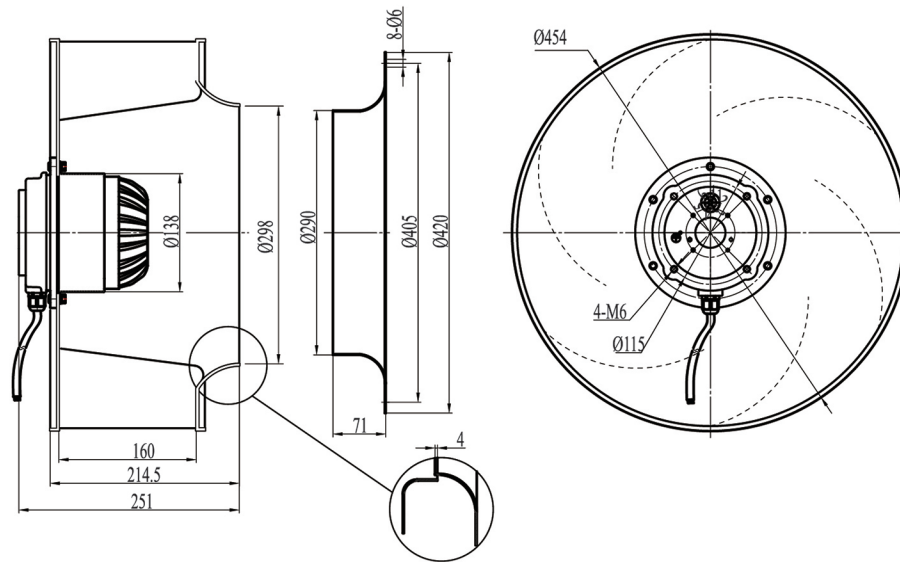

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor uF	最大风量 Air flow/max m ³ /h	静压 Static pressure Pa	净重 N.W. Kg
DYF4D-450-HW1a	①	380	50	1.48	600	1400	83	—	5600	0	9
DYF4E-450-HW2a	②	220	50	3.0	650	1380	82	12	5400	0	11
DYF6D-450-HW3a	③	380	50	0.64	260	870	74	—	3900	0	8
DYF6E-450-HW4a	④	220	50	1.0	240	890	68	6	3850	0	8