


AL FAN
轴流风机

EC CENTRIFUGAL FAN
离心风机

EC SHADED-POLE MOTOR
罩极电机


AC AXIAL FAN
外转子轴流风机

AC CENTRIFUGAL FAN
离心风机

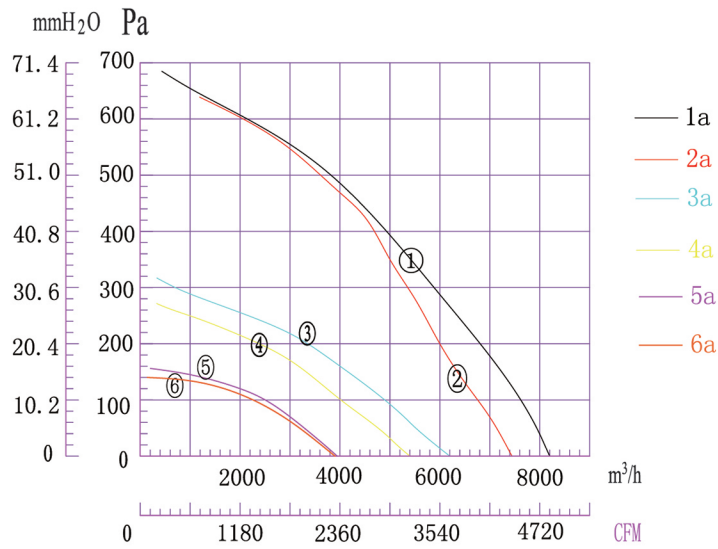


- 防护等级: IP54
- 绝缘等级: "B" "F"
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 铝合金
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: "B" "F"
- Mode of Operation: S1
- Bearings: Maintenance-free bearings
- Blades: Aluminium alloy sheet
- Perm.amb.temp.: -40°C - +60°C

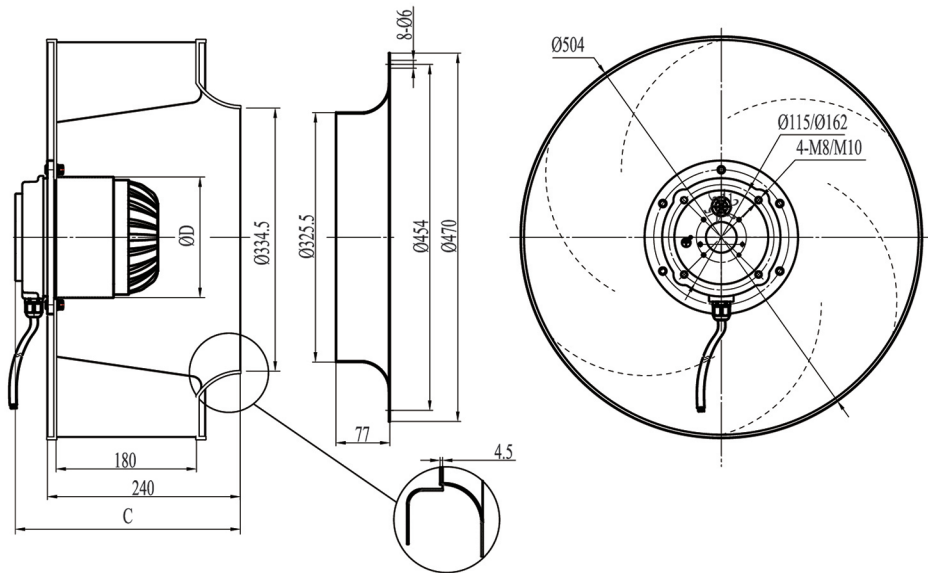


技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor uF	最大风量 Air flow/max m³/h	静压 Static pressure Pa	C	ØD	净重 N.W. Kg
DYF4D-500-HW1a	①	380	50	1.9	1180	1350	85	—	8100	0	285.5	180	17
DYF4E-500-HW2a	②	220	50	5.4	1135	1420	86	35	7455	0	285.5	180	20
DYF6D-500-HW2a	③	380	50	1.85	550	930	73	—	6100	0	276.5	138	12
DYF6E-500-HW3a	④	220	50	2.0	400	820	73	10	5200	0	276.5	138	12
DYF8D-500-HW4a	⑤	380	50	0.39	180	640	64	—	3900	0	276.5	138	10
DYF8E-500-HW5a	⑥	220	50	1.01	220	660	68	5	3900	0	276.5	138	11

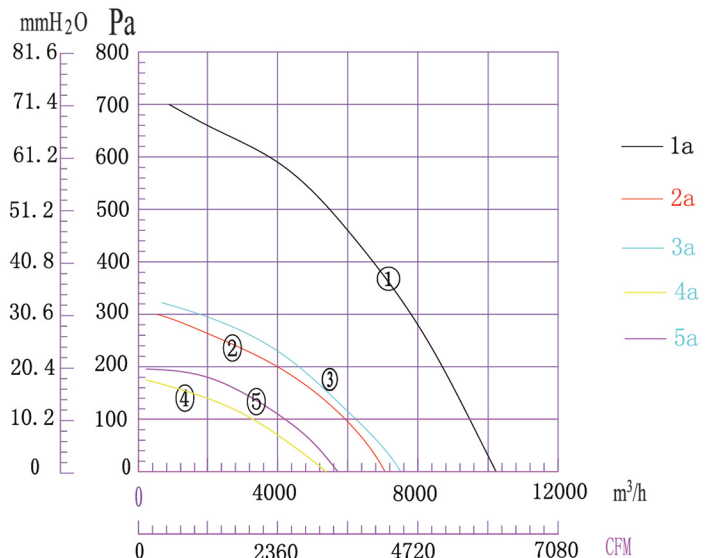

- 防护等级: IP54
- 绝缘等级: "B" "F"
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 铝合金
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: "B" "F"
- Mode of Operation: S1
- Bearings: Maintenance-free bearings
- Blades: Aluminium alloy sheet
- Perm.amb.temp.: -40°C - +60°C

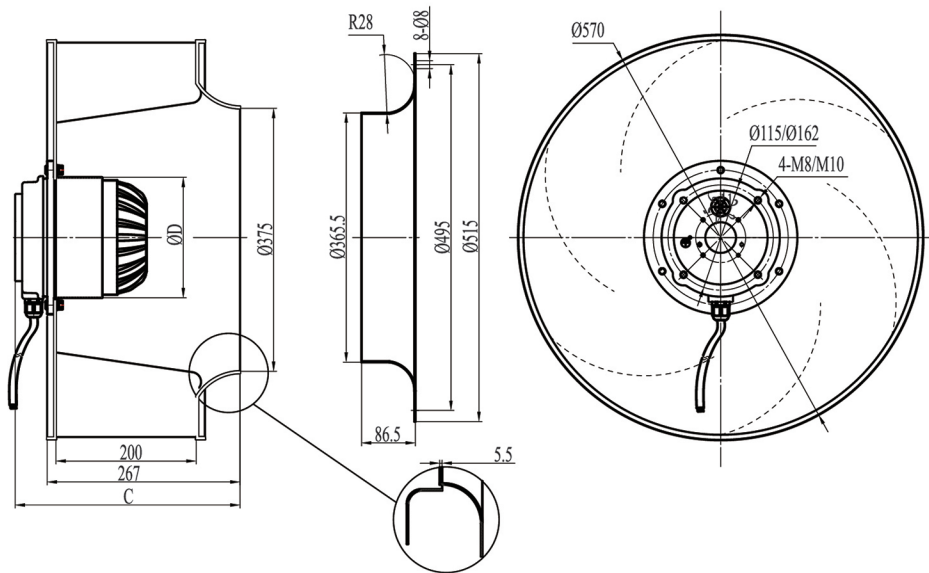

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor uF	最大风量 Air flow/max m³/h	静压 Static pressure Pa	C	ØD	净重 N.W. Kg
DYF4D-560-HW1a	①	380	50	3.4	1850	1230	86	—	10500	0	313.5	180	23
DYF6D-560-HW2a	②	380	50	1.08	620	840	76	—	7050	0	304.5	138	13
DYF6E-560-HW3a	③	220	50	2.9	630	850	77	15	7100	0	304.5	138	13
DYF8D-560-HW4a	④	380	50	0.56	280	620	71	—	5400	0	304.5	138	13
DYF8E-560-HW5a	⑤	220	50	1.5	320	670	72	8	5700	0	304.5	138	13

AL FAN
轴流风机

EC CENTRIFUGAL FAN
离心风机

EC SHADED-POLE MOTOR
罩极电机

AC AXIAL FAN
外转子轴流风机

AC CENTRIFUGAL FAN
离心风机