


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

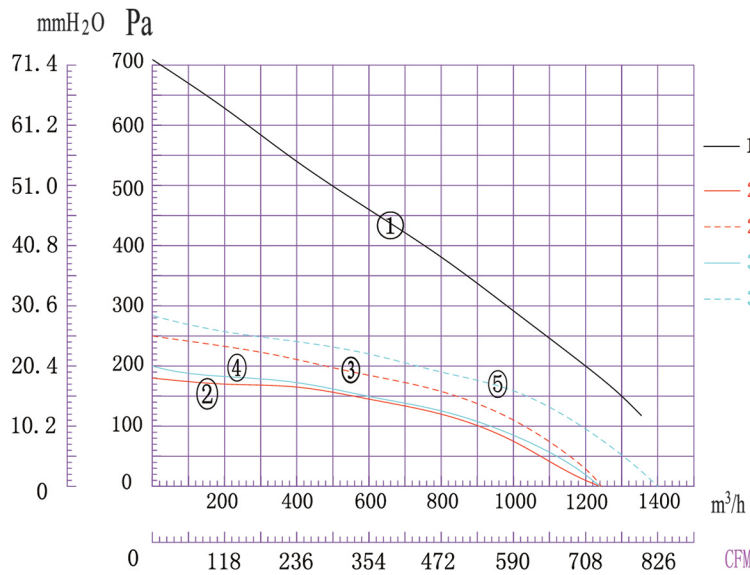


- 防护等级: IP54
- 绝缘等级: "B" "F"
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: "B" "F"
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

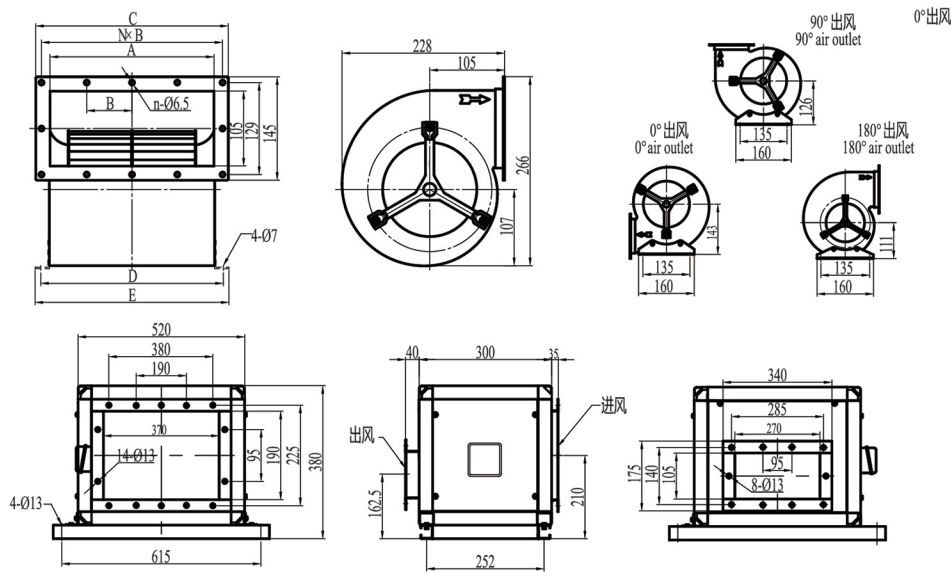


技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg	A	B	C	D	E	n	N
DYF(SJX)2E-160-QS1a		220	50	2.3	410	1850	65	18	1300	0	6.0	270	73.5	310	296	312	12	4
DYF4E-160-QS2a		220	50	0.75	150	1300	64	4	1240	0	4.8	230	63.5	270	256	272	8	2
DYF4E-160-QS2b		230	60	1.3	250	1350	65	5	1260	0								
DYF4E-160-QS3a		220	50	0.8	185	1380	65	6	1240	0	6.1	270	73.5	310	296	312	12	4
DYF4E-160-QS3b		230	60	1.0	235	1570	68	5	1400	0								

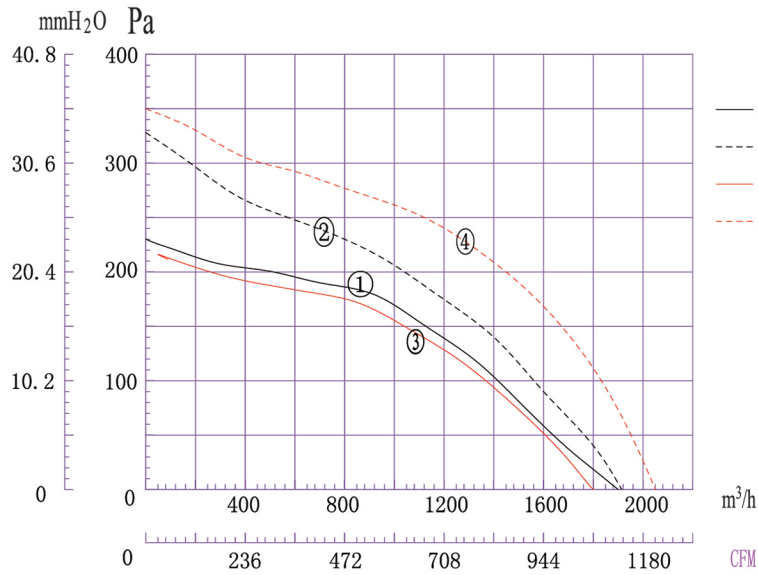

- 防护等级: IP54
- 绝缘等级: "B" "F"
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: "B" "F"
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

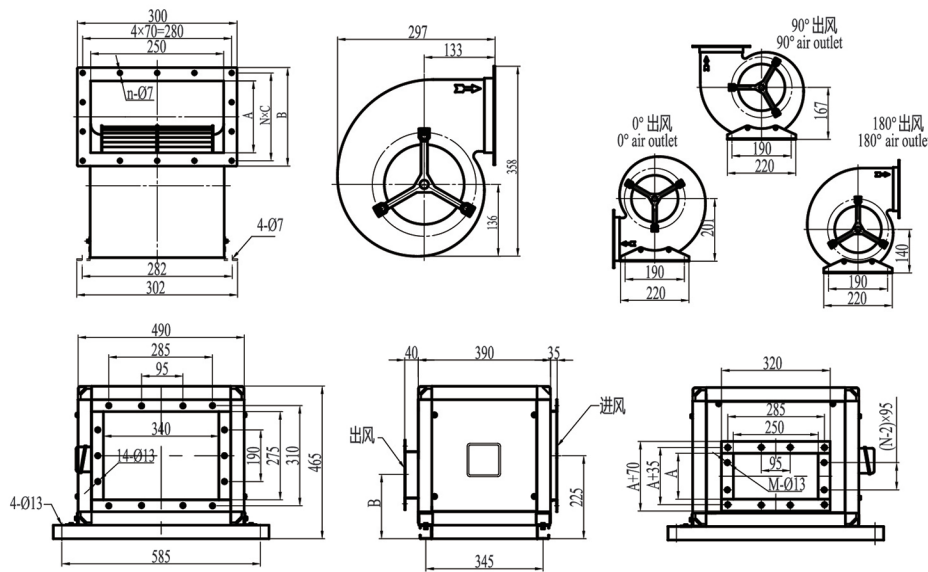

技术参数 Technical data

型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Air flow/max m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg	A	B	C	E	n	N
DYF(SJX)4D-180-QS1a	①	380	50	0.51	240	1350	63	—	1900	0	9.8	225	275	63.5	4	16	12
DYF(SJX)4D-180-QS1b	②	400	60	0.57	330	1480	63	—	1980	0							
DYF(SJX)4E-180-QS2a	③	220	50	1.3	250	1220	66	8	1800	0	11.2	135	185	82.5	2	12	10
DYF(SJX)4E-180-QS2b	④	230	60	2.2	490	1650	67	10	2050	0							

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN