


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

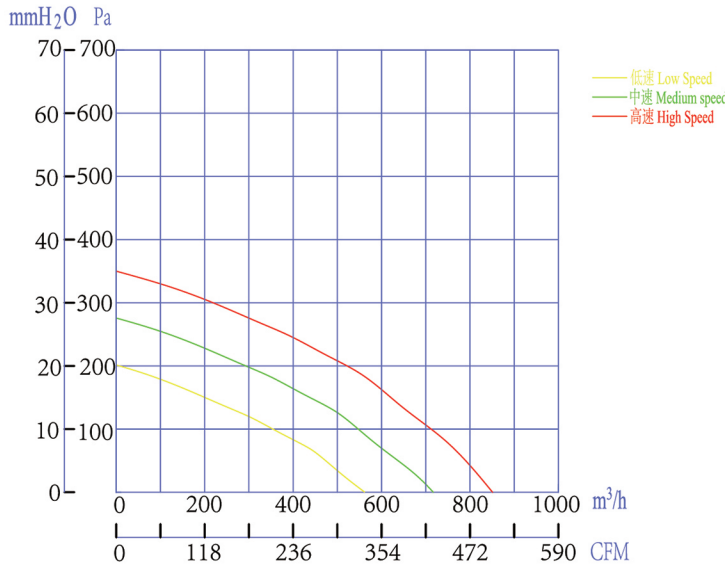


- 防护等级：IP54
- 绝缘等级：F
- 叶片数：7
- 叶片材质：PP
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C - +60°C
- 工作电压：24VDC/48VDC
- 调速方式：0~24V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Number of blades: 7
- Blades: PP
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 24VDC / 48VDC
- Std. Control: 0~24V or PWM Control

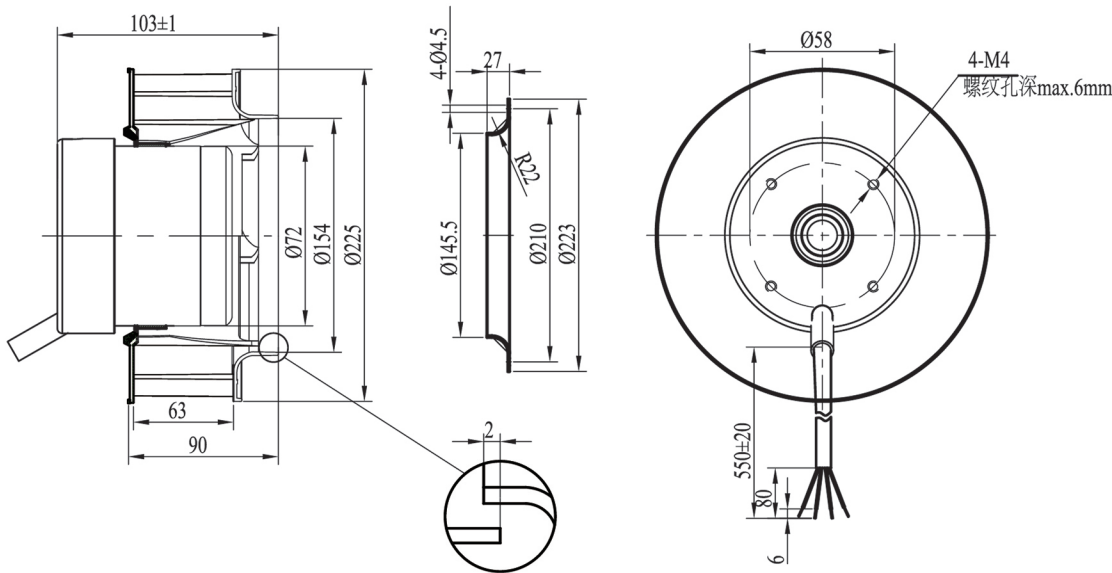


技术参数 Technical data									
型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	最大静压 Max.static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
HW3DC225/072/ I -090	DC24	-	2.8	55	2000	850	350	1.3	65
HW4DC225/072/ I -090	DC48	-	1.4	55	2000	850	350	1.3	65

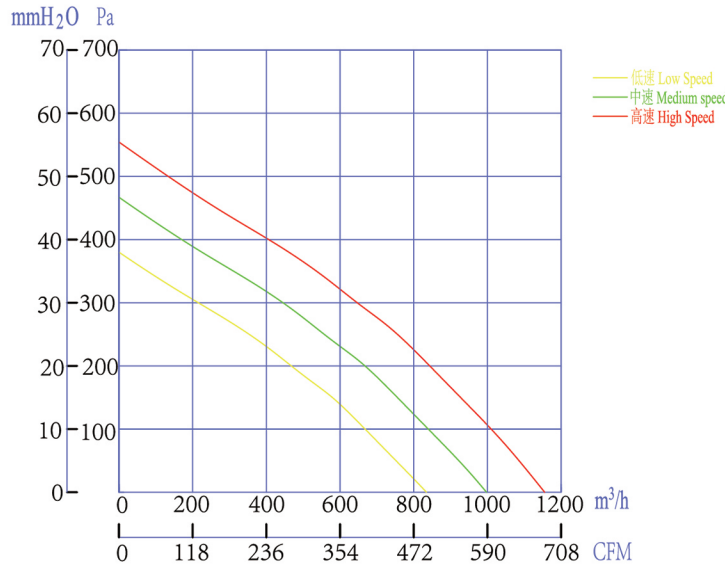

- 防护等级：IP54
- 绝缘等级：F
- 叶片数：7
- 叶片材质：PP
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C - +60°C
- 工作电压：24VDC/48VDC
- 调速方式：0~24V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Number of blades: 7
- Blades: PP
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 24VDC / 48VDC
- Std. Control: 0~24V or PWM Control

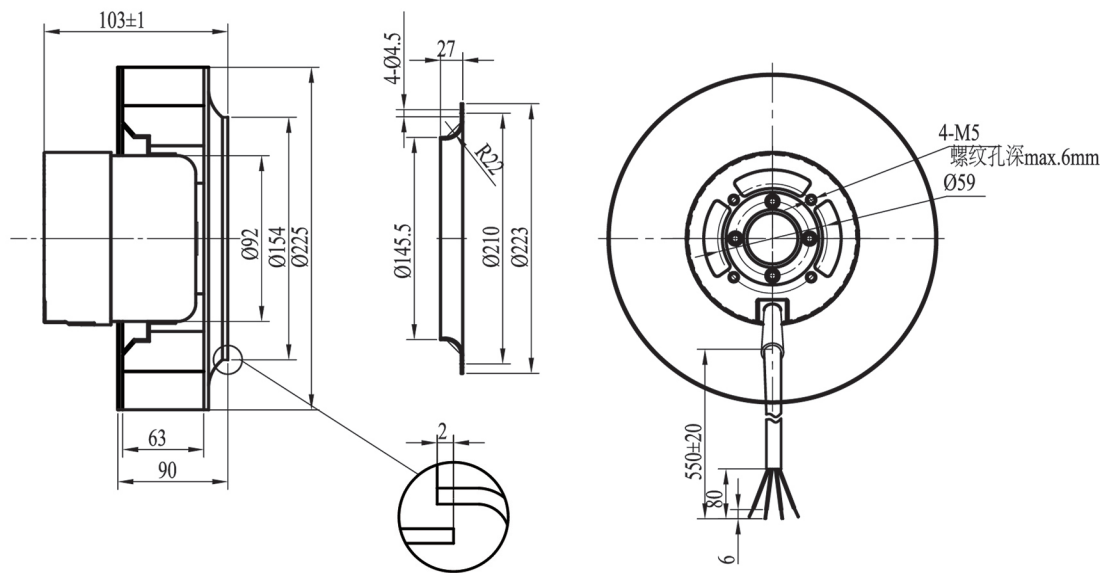

技术参数 Technical data									
型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	最大静压 Max.static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
HW3DC225/092/ I -090	DC24	-	5.2	110	2500	1120	550	0.7	68
HW4DC225/092/ I -090	DC48	-	2.5	110	2500	1120	550	0.7	68

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN