


轴流风机
AL FAN

EC离心风机
EC CENTRIFUGAL FAN

EC罩极电机
EC SHADED-POLE MOTOR

AC外转子轴流风机
AC AXIAL FAN

AC离心风机
AC CENTRIFUGAL FAN

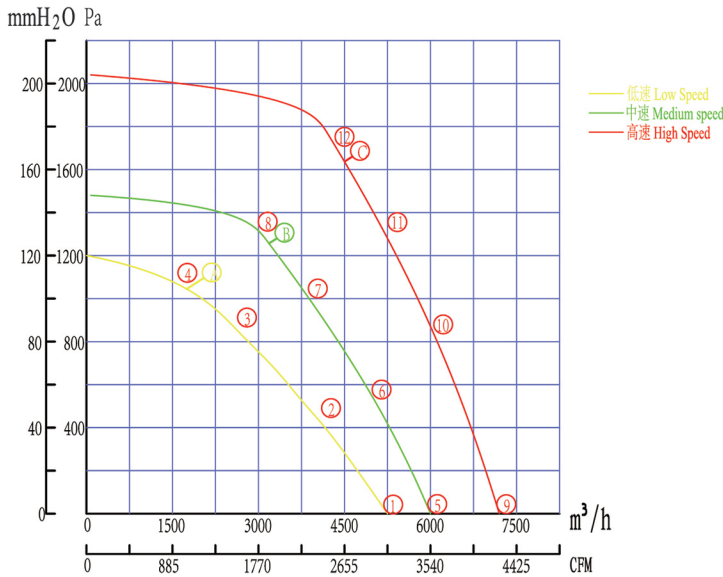


- 防护等级：IP54
 - 绝缘等级：F
 - 叶片数：6
 - 叶片材质：铝合金
 - 电机工作制：S1
 - 轴承：免维护深沟球轴承
 - 工作环境温度：-25°C~+60°C
 - 工作电压：380-480V/3P
 - 调速方式：0~10V或PWM控制
- Type of Protection: IP54
 - Insulation Class: F
 - Number of blades: 6
 - Blades: Aluminium alloy sheet
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Perm.amb.temp.: -25°C - +60°C
 - Operating Voltage: 380 - 480V/3P
 - Std. Control: 0~10V or PWM Control


序号		Votage V	Speed r/min	Power KW	Current A	St. P. Pa	Air Flow m³/h
A	1	400	3000	0.68	1.07	0	5200
A	2	400	3000	1.07	1.62	400	4000
A	3	400	3000	1.25	1.9	800	2800
A	4	400	3000	1.21	1.85	1000	1800
B	1	400	3400	1.2	1.7	0	6000
B	2	400	3400	1.6	2.42	500	5000
B	3	400	3400	1.82	2.8	1000	3800
B	4	400	3400	1.8	2.7	1300	3750
C	1	400	4000	1.75	2.67	0	7050
C	2	400	4000	2.63	4.2	800	6100
C	3	400	4000	3.0	4.55	1200	5300
C	4	400	4000	2.95	4.6	1600	4580

技术参数 Technical data									
型号 Model	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input KW	转速 Speed/rpm r/min	最大风量 Air flow / max m³/h	最大静压 Max Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
HW6EC310/102/Ⅰ ㉠	400	50/60	1.9	1.24	3010	5200	1200	7.2	90
HW6EC310/138/Ⅳ ㉢	400	50/60	2.9	1.85	3410	6000	1500	10.5	93
HW6EC310/138/Ⅱ ㉡	400	50/60	3.0	3.0	4000	7100	2020	12	102

HW6EC310/102风机外形图

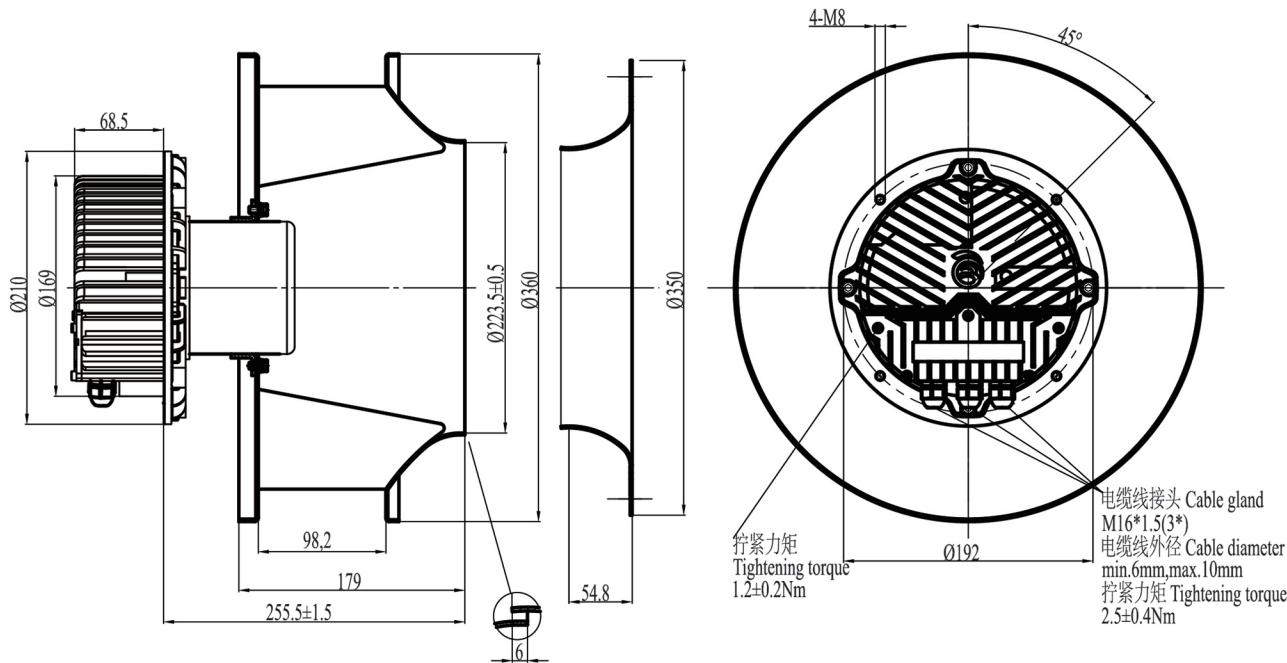

HJ6EC310/102风机整机外形图

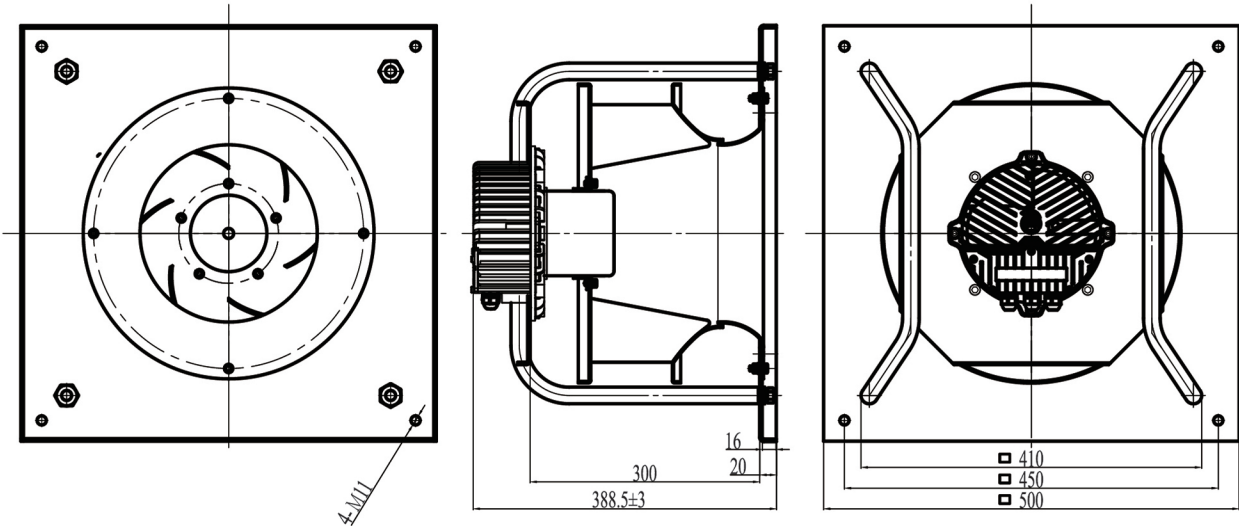

轴流风机
AL FAN


EC离心风机
EC CENTRIFUGAL FAN

EC罩极电机
EC SHADED-POLE MOTOR



AC外转子轴流风机
AC AXIAL FAN

AC离心风机
AC CENTRIFUGAL FAN

HW6EC310/102风机外形图

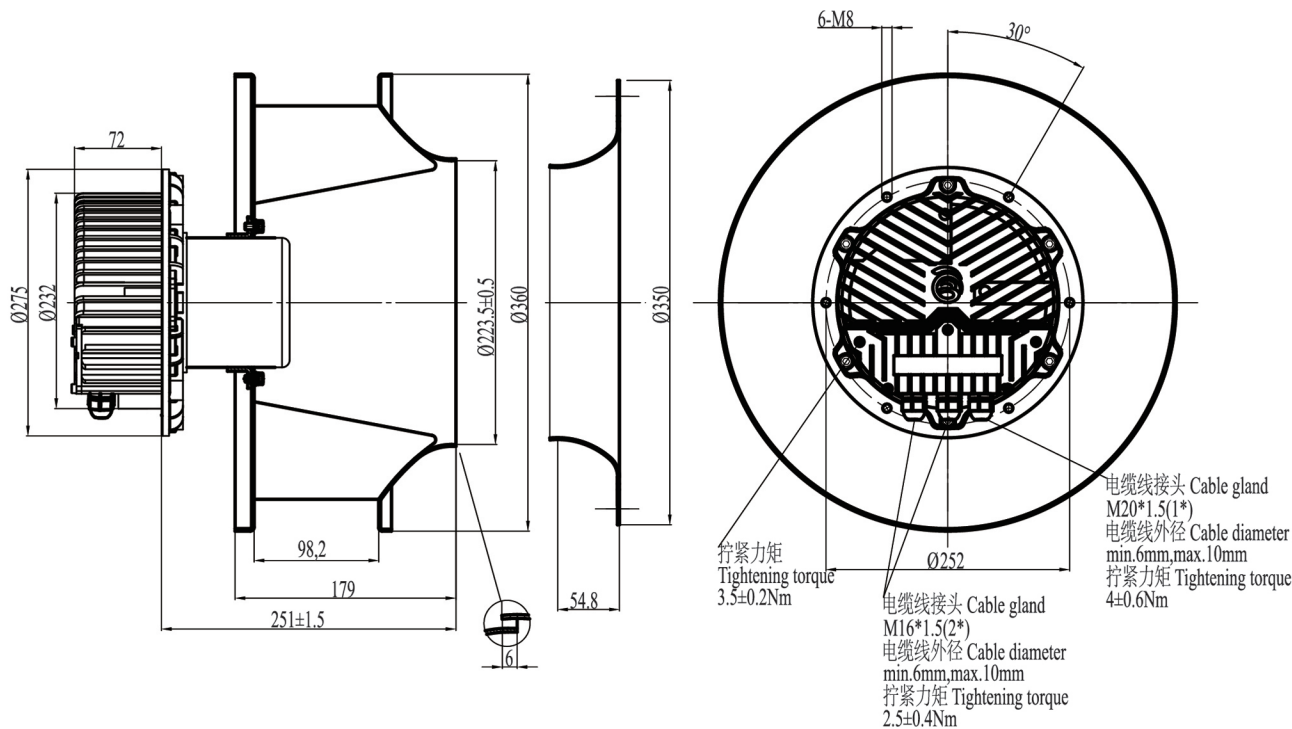

HJ6EC310/102风机整机外形图

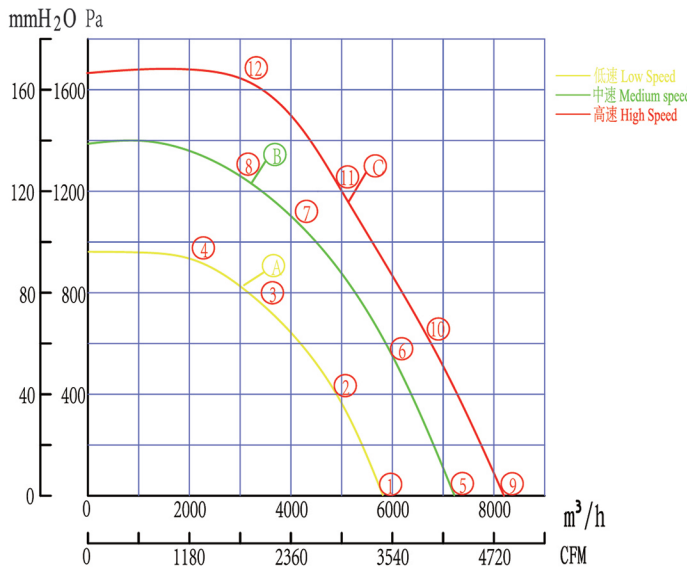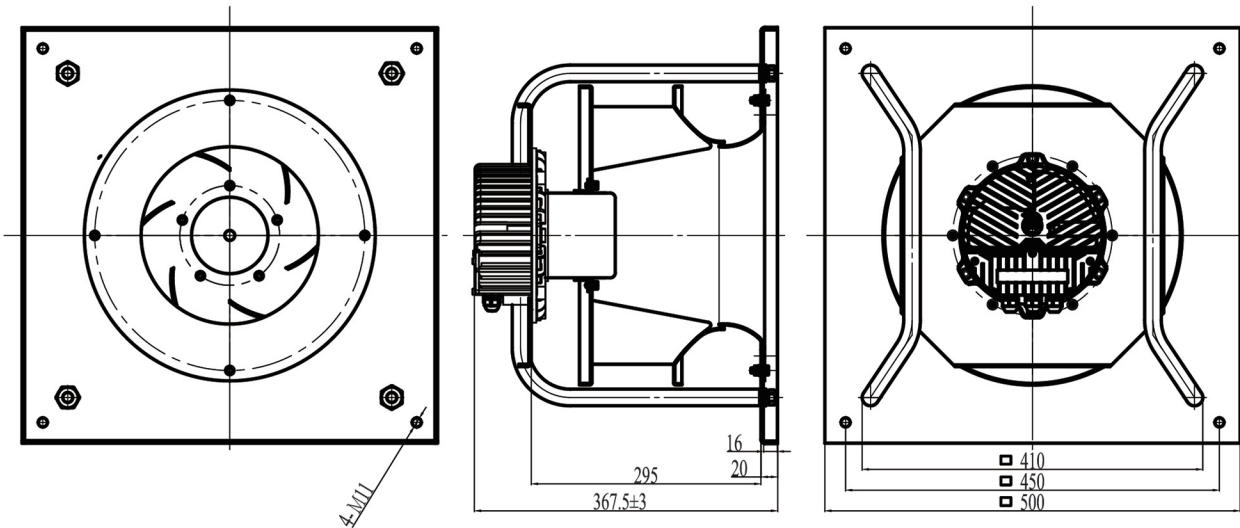

- 防护等级: IP54
- 绝缘等级: F
- 叶片数: 5
- 叶片材质: 铝合金
- 电机工作制: S1
- 轴承: 免维护深沟球轴承
- 工作环境温度: -25°C~+60°C
- 工作电压: 380-480V/3P
- 调速方式: 0~10V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Number of blades: 5
- Blades: Aluminium alloy sheet
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 380 - 480V/3P
- Std. Control: 0~10V or PWM Control

序号	Votage V	Speed r/min	Power KW	Current A	St. P. Pa	Air Flow m³/h
A 1	400	2400	0.651	1.03	0	5900
A 2	400	2400	1.02	1.56	400	4900
A 3	400	2400	1.16	1.78	785	3300
A 4	400	2400	1.12	1.73	902	2300
B 1	400	2870	1.1	1.77	0	7200
B 2	400	2870	1.62	2.58	500	6000
B 3	400	2870	2.0	3.15	1000	4300
B 4	400	2870	1.98	3.07	1300	3000
C 1	400	3230	1.55	2.41	0	8200
C 2	400	3230	2.27	3.49	600	6800
C 3	400	3230	2.81	4.3	1200	5000
C 4	400	3230	2.69	4.1	1600	3300

技术参数 Technical data

型号 Model	电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input KW	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	最大静压 Max Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
HW6EC355/138/IV ㉔	400	50/60	1.16	1.78	2400	5900	950	13	87
HW6EC355/138/II ㉕	400	50/60	3.15	2	2870	7200	1400	13	92
HW6EC355/138/II ㉖	400	50/60	4.3	2.81	3230	8200	1680	13	93