


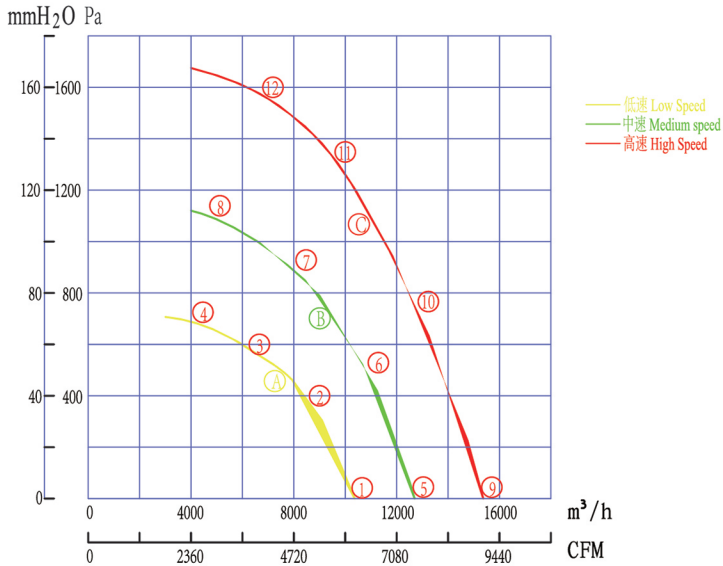

- 防护等级：IP54
- 绝缘等级：F
- 叶片数：5
- 叶片材质：铝合金
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C - +60°C
- 工作电压：380-480V/3P
- 调速方式：0~10V或PWM控制


- Type of Protection: IP54
- Insulation Class: F
- Number of blades: 5
- Blades: Aluminium alloy sheet
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 380 - 480V/3P
- Std. Control: 0~10V or PWM Control

| 序号 |   | Votage<br>V | Speed<br>r/min | Power<br>KW | Current<br>A | St. P.<br>Pa | Air Flow<br>m³/h |
|----|---|-------------|----------------|-------------|--------------|--------------|------------------|
| A  | 1 | 400         | 1465           | 1.107       | 1.73         | 0            | 10368            |
| A  | 2 | 400         | 1465           | 1.473       | 2.3          | 248          | 9000             |
| A  | 3 | 400         | 1465           | 1.656       | 2.55         | 560          | 6600             |
| A  | 4 | 400         | 1465           | 1.537       | 2.37         | 680          | 4325             |
| B  | 1 | 400         | 1815           | 2.116       | 3.32         | 0            | 12700            |
| B  | 2 | 400         | 1815           | 2.712       | 4.22         | 410          | 11000            |
| B  | 3 | 400         | 1815           | 3.043       | 4.86         | 875          | 8230             |
| B  | 4 | 400         | 1815           | 2.835       | 4.41         | 1090         | 5300             |
| C  | 1 | 400         | 2200           | 3.700       | 5.92         | 0            | 15370            |
| C  | 2 | 400         | 2200           | 4.872       | 7.39         | 700          | 13000            |
| C  | 3 | 400         | 2200           | 5.500       | 8.81         | 1295         | 10000            |
| C  | 4 | 400         | 2200           | 5.180       | 8.32         | 1550         | 7000             |


技术参数 Technical data

| 型号<br>Model       | 电压<br>Voltage<br>V | 频率<br>Frequency<br>Hz | 电 流<br>Current draw<br>A | 输入功率<br>Power input<br>KW | 转 速<br>Speed/rpm<br>r/min | 最大风量<br>Air flow / max<br>m³/h | 最大静压<br>Max Static Pressure<br>Pa | 净重<br>N.W<br>Kg | 噪音<br>Noise level<br>dB(A) |
|-------------------|--------------------|-----------------------|--------------------------|---------------------------|---------------------------|--------------------------------|-----------------------------------|-----------------|----------------------------|
| HW6EC500/188/IX ④ | 400                | 50/60                 | 4.5                      | 3.1                       | 1800                      | 9000                           | 800                               | 50              | 85                         |
| HW6EC500/188/IX ③ | 400                | 50/60                 | 5.3                      | 3.4                       | 1900                      | 12700                          | 1200                              | 50              | 90                         |
| HW6EC500/188/IX ② | 400                | 50/60                 | 9.1                      | 5.5                       | 2200                      | 15370                          | 1800                              | 50              | 94                         |


HW6EC500/188风机外形图

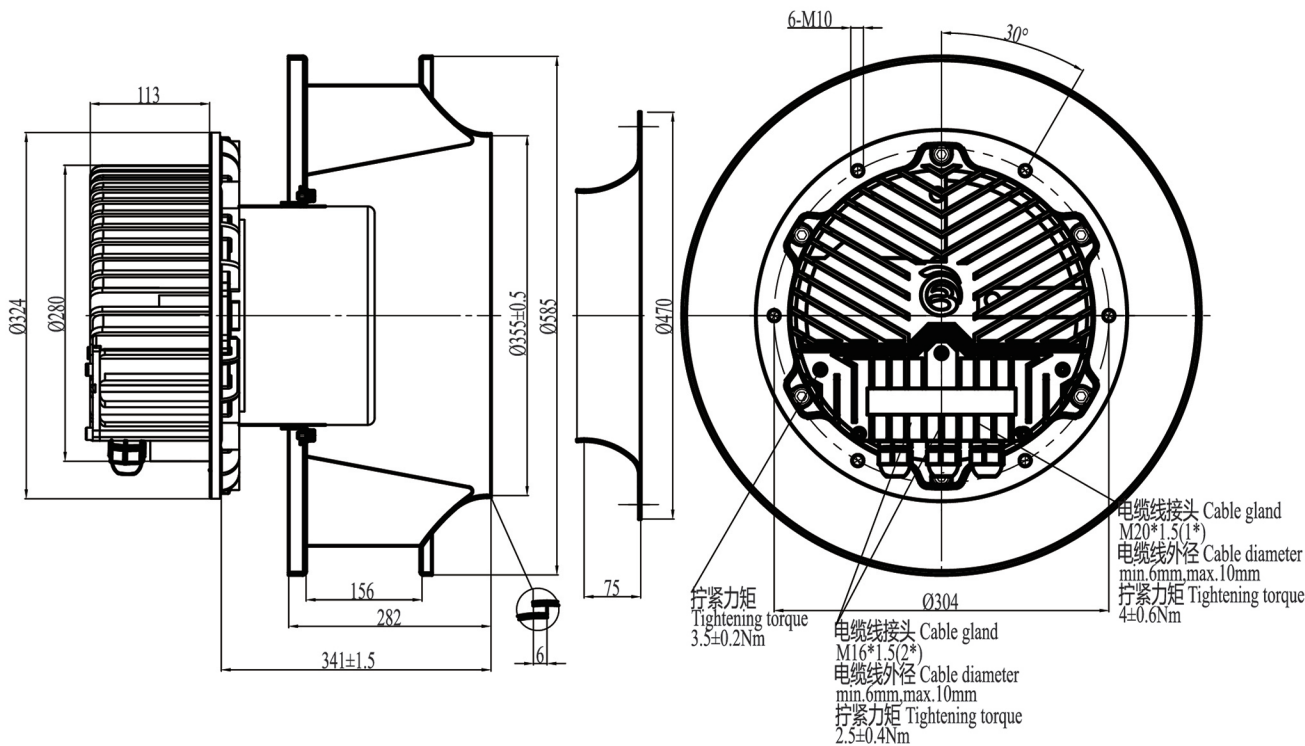



HJ6EC500/188风机整机外形图

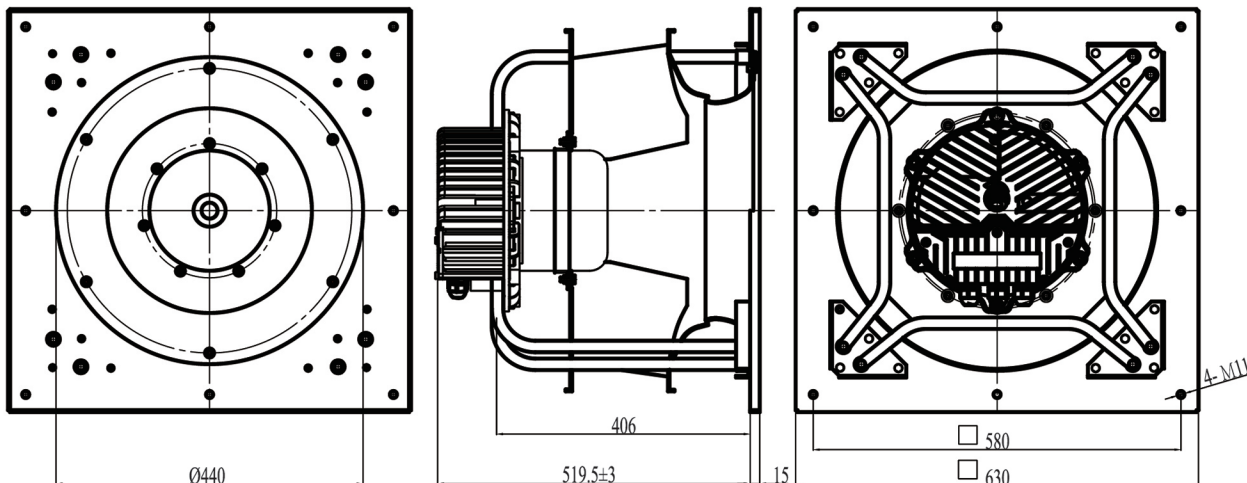

HW6EC500/188风机外形图

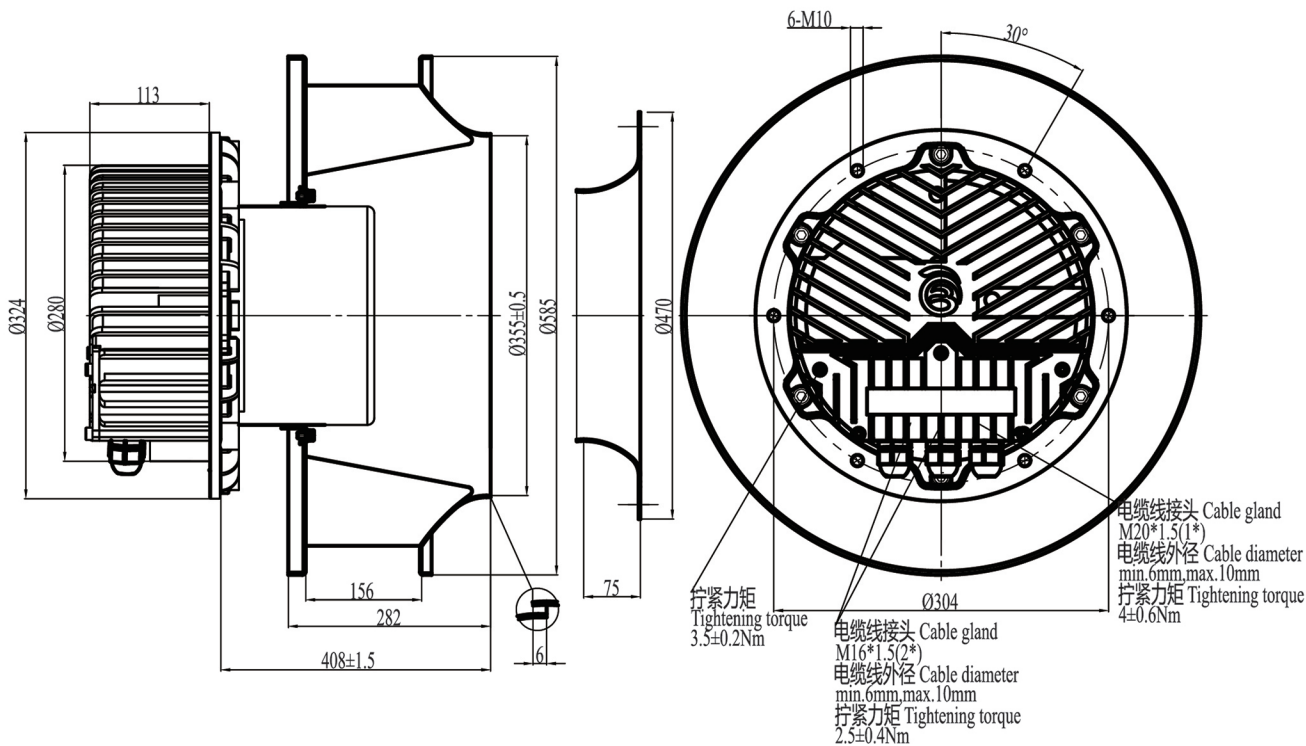

HJ6EC500/188风机整机外形图

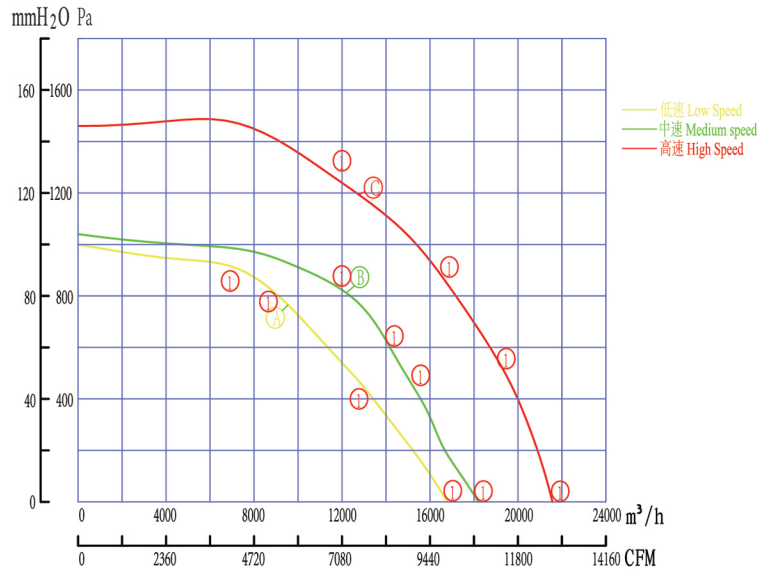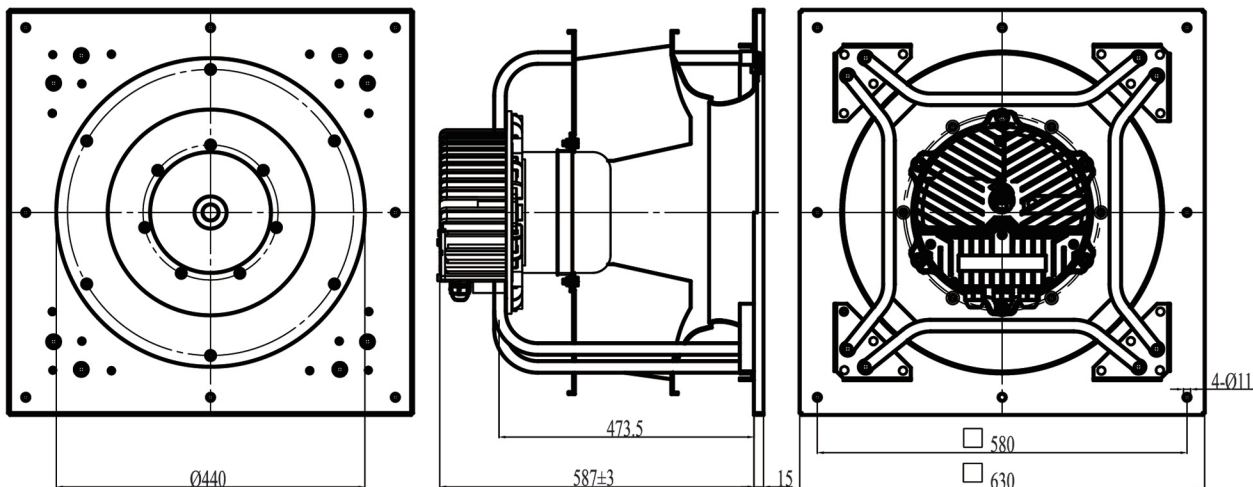

- 防护等级: IP54
- 绝缘等级: F
- 叶片数: 5
- 叶片材质: 铝合金
- 电机工作制: S1
- 轴承: 免维护深沟球轴承
- 工作环境温度: -25°C~+60°C
- 工作电压: 380-480V/3P
- 调速方式: 0~10V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Number of blades: 5
- Blades: Aluminium alloy sheet
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 380 - 480V/3P
- Std. Control: 0~10V or PWM Control

| 序号  | Voltage V | Speed r/min | Power KW | Current A | St. P. Pa | Air Flow m³/h |
|-----|-----------|-------------|----------|-----------|-----------|---------------|
| A 1 | 400       | 1465        | 1.9      | 3.2       | 0         | 16800         |
| A 2 | 400       | 1465        | 2.2      | 3.8       | 710       | 9000          |
| A 3 | 400       | 1465        | 2.8      | 4.2       | 710       | 9000          |
| A 4 | 400       | 1465        | 3.1      | 4.5       | 900       | 6600          |
| B 1 | 400       | 1815        | 2.5      | 3.9       | 0         | 18200         |
| B 2 | 400       | 1815        | 2.8      | 4.22      | 400       | 15000         |
| B 3 | 400       | 1815        | 3.3      | 4.86      | 600       | 13000         |
| B 4 | 400       | 1815        | 4.5      | 6.2       | 800       | 14000         |
| C 1 | 400       | 2200        | 3.7      | 4.2       | 0         | 21300         |
| C 2 | 400       | 2200        | 4.8      | 7.39      | 600       | 19000         |
| C 3 | 400       | 2200        | 5.2      | 8.81      | 800       | 17000         |
| C 4 | 400       | 2200        | 5.1      | 8.32      | 1200      | 12900         |

技术参数 Technical data

| 型号<br>Model       | 电压<br>Voltage V | 频率<br>Frequency Hz | 电流<br>Current draw A | 输入功率<br>Power input KW | 转速<br>Speed/rpm r/min | 最大风量<br>Air flow / max m³/h | 最大静压<br>Max Static Pressure Pa | 净重<br>N.W Kg | 噪音<br>Noise level dB(A) |
|-------------------|-----------------|--------------------|----------------------|------------------------|-----------------------|-----------------------------|--------------------------------|--------------|-------------------------|
| HW6EC560/180/IX ① | 400             | 50/60              | 4.5                  | 3.1                    | 1470                  | 16800                       | 1000                           | 50           | 85                      |
| HW6EC560/180/IX ② | 400             | 50/60              | 5.3                  | 3.4                    | 1540                  | 18200                       | 1040                           | 50           | 90                      |
| HW6EC560/180/IX ③ | 400             | 50/60              | 8.0                  | 5.2                    | 1760                  | 21300                       | 1450                           | 50           | 94                      |