


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN


EC 罩极电机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

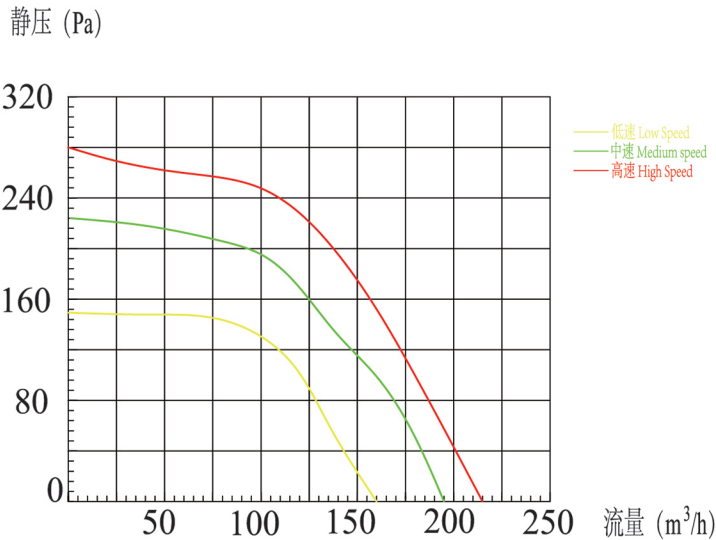

- 防护等级: IP54
 - 绝缘等级: F
 - 叶片材质: 镀锌板
 - 电机工作制: S1
 - 轴承: 免维护深沟球轴承
 - 工作环境温度: -25°C - +60°C
 - 工作电压: 200V-277V/1P 24VDC/48VDC
 - 调速方式: 0~10V或PWM控制
- Type of Protection: IP54
 - Insulation Class: F
 - Blades: Galvanized sheet
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Perm.amb.temp.: -25°C - +60°C
 - Operating Voltage: 200V - 277V/1P 24VDC/48VDC
 - Std. Control: 0~10V or PWM Control

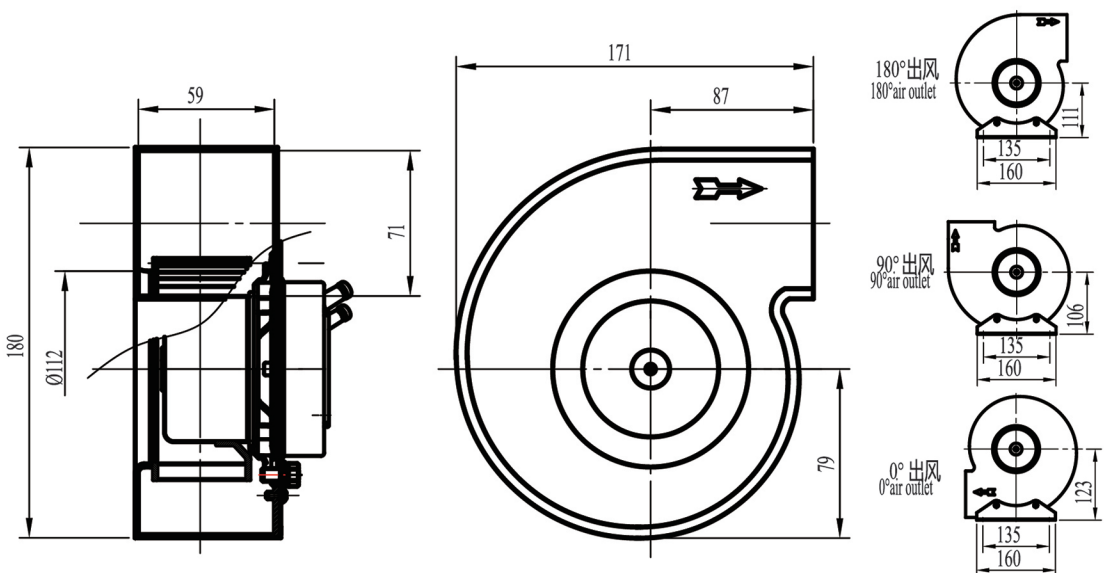

技术参数 Technical data									
型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
QD2EC133/072/I3-IG	230	50/60	0.3	38	1925	215	-	1.5	63
QD3DC133/072/I3	DC24	-	2.2	40	1925	215	-	1.3	64
QD4DC133/072/I3	DC48	-	1.1	45	1925	215	-	1.3	62


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN


EC 罩极电机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

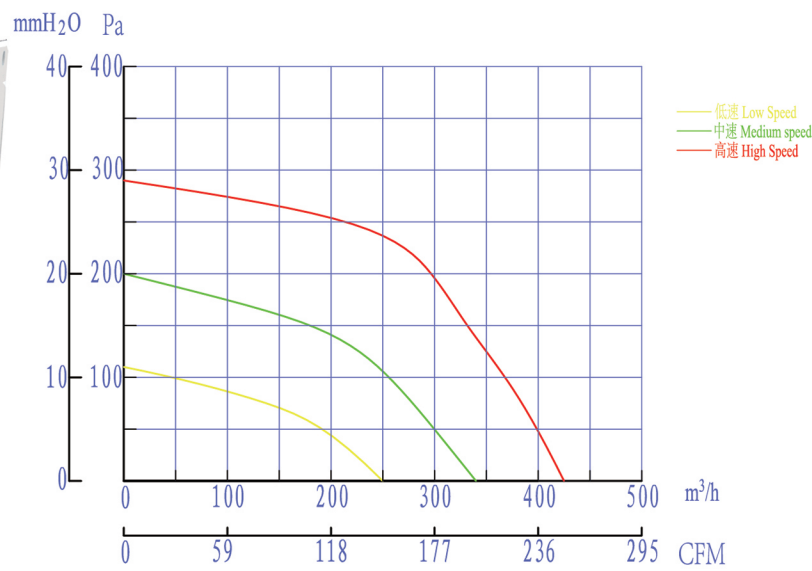

- 防护等级: IP54
 - 绝缘等级: F
 - 叶片材质: 镀锌板
 - 电机工作制: S1
 - 轴承: 免维护深沟球轴承
 - 工作环境温度: -25°C - +60°C
 - 工作电压: 200V-277V/1P 24VDC/48VDC
 - 调速方式: 0~10V或PWM控制
- Type of Protection: IP54
 - Insulation Class: F
 - Blades: Galvanized sheet
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Perm.amb.temp.: -25°C - +60°C
 - Operating Voltage: 200V - 277V/1P 24VDC/48VDC
 - Std. Control: 0~10V or PWM Control

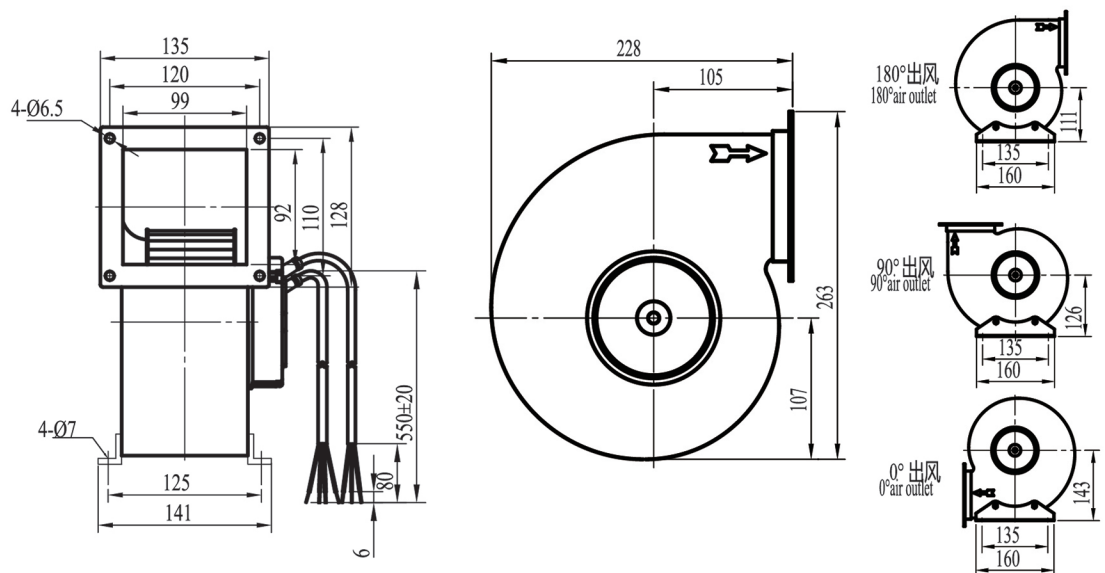

技术参数 Technical data									
型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
QD2EC140/092/ I -1P	230	50/60	1.2	170	2770	425	-	3.2	63
QD2EC140/072/VI-1P	230	50/60	0.5	66	1800	430	-	2.6	63
QD3DC140/072/VI	DC24	-	2.5	54	1800	430	-	2.3	63
QD4DC140/072/VI	DC48	-	1.3	54	1800	430	-	2.3	63