


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

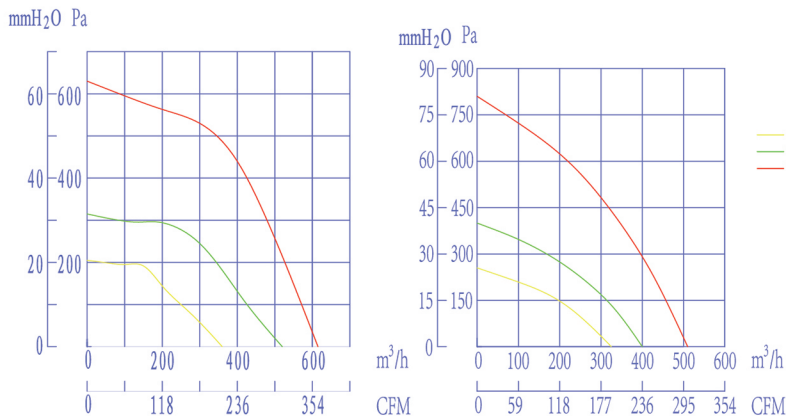


- 防护等级：IP54
- 绝缘等级：F
- 叶片材质：镀锌板
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C-+60°C
- 工作电压：200V-277V/1P 24VDC/48VDC
- 调速方式：0~10V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Blades: Galvanized sheet
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 200V - 277V/1P 24VDC/48VDC
- Std. Control: 0~10V or PWM Control

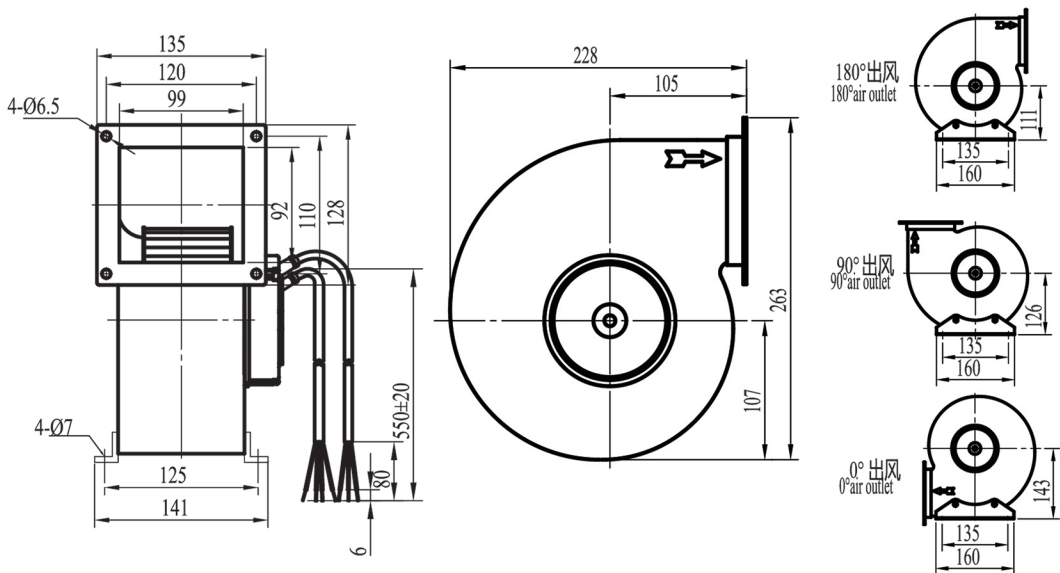


技术参数 Technical data

型号 Model	额定电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
QD2EC146/092/ I -1P	230	50/60	1.34	178	2520	825	-	3.6	72
QD3DC146/092/ I	DC24	-	7.5	180	2200	680	-	3.0	68
QD4DC146/092/ I	DC48	-	3.8	180	2200	680	-	3.0	67

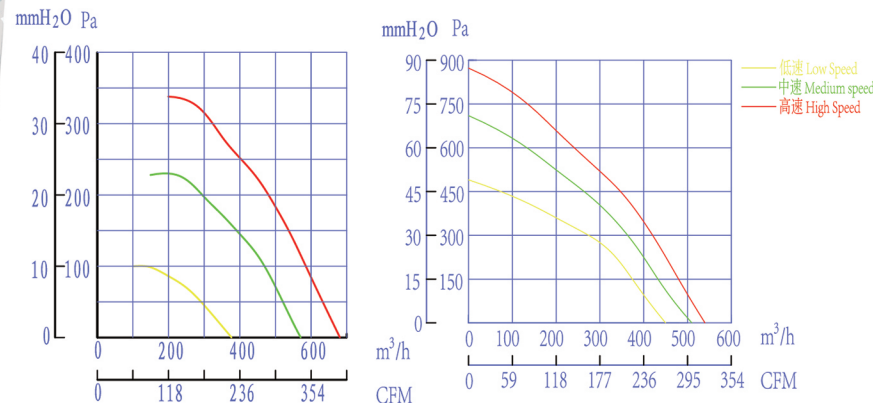

- 防护等级：IP54
- 绝缘等级：F
- 叶片材质：镀锌板
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C-+60°C
- 工作电压：200V-277V/1P 24VDC/48VDC
- 调速方式：0~10V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Blades: Galvanized sheet
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 200V - 277V/1P 24VDC/48VDC
- Std. Control: 0~10V or PWM Control

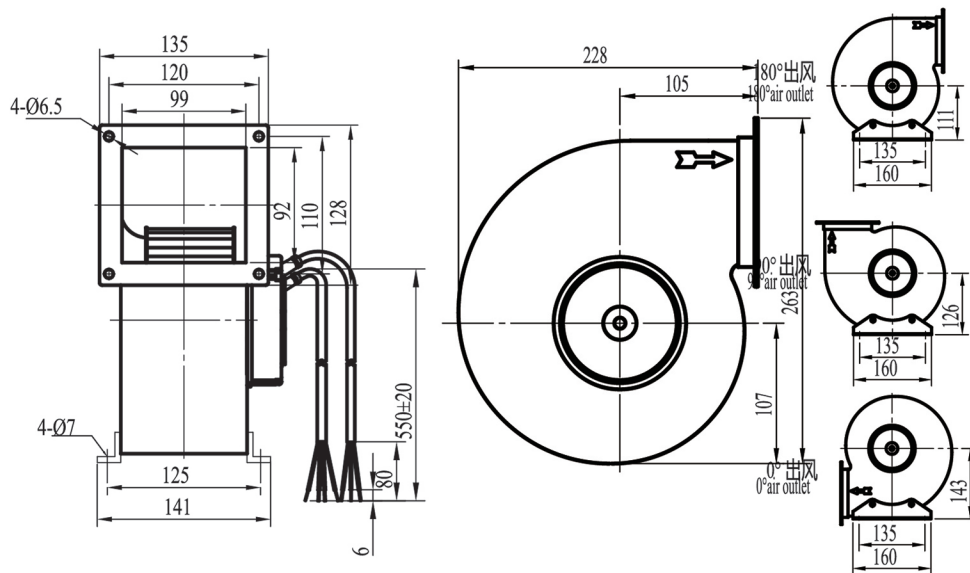

技术参数 Technical data

型号 Model	额定电压 Voltage V	频率 Frequency Hz	电流 Current draw A	输入功率 Power input W	转速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
QD2EC160/092/ I -1P	230	50/60	1.35	180	2150	680	-	3.8	74
QD3DC160/092/ I	DC24	-	5.8	105	1750	505	-	3.0	67
QD4DC160/092/ I	DC48	-	2.9	105	1750	505	-	3.0	67

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN