



轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR



AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

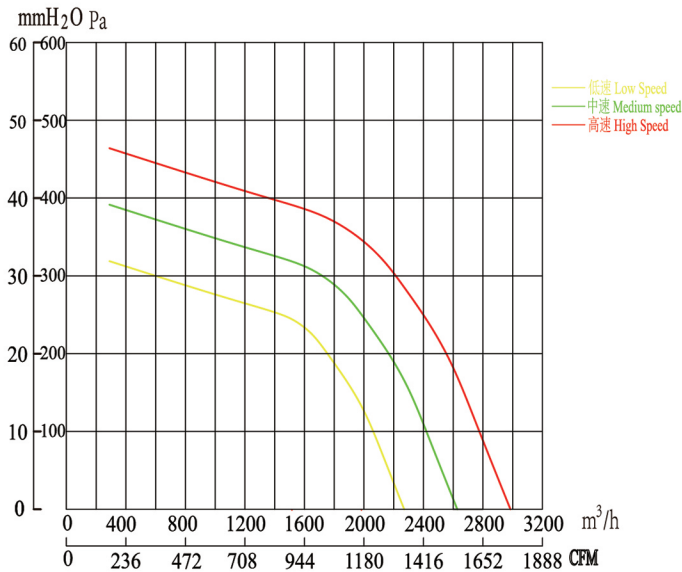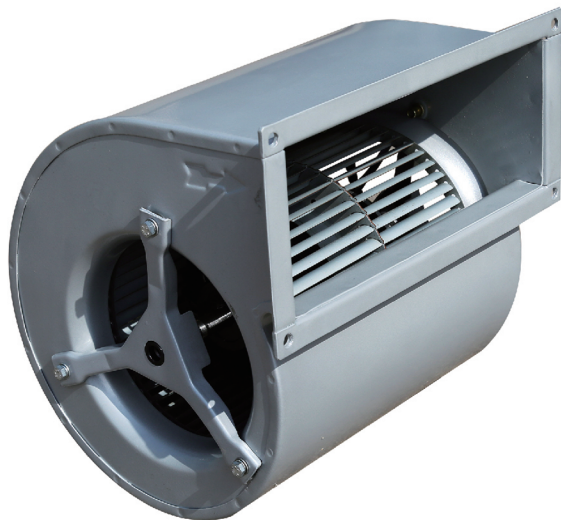

- 防护等级：IP54
- 绝缘等级：F
- 叶片材质：镀锌板
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C - +60°C
- 工作电压：200V-277V/1P
- 调速方式：0~10V或PWM控制


- Type of Protection: IP54
- Insulation Class: F
- Blades: Galvanized sheet
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 200V - 277V/1P
- Std. Control: 0~10V or PWM Control

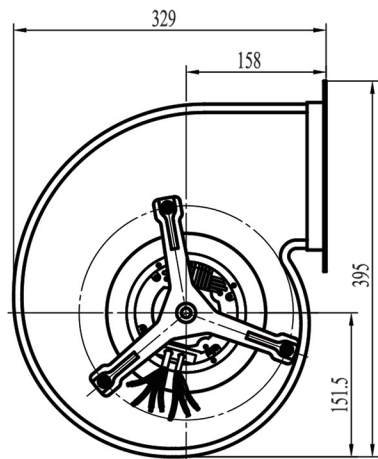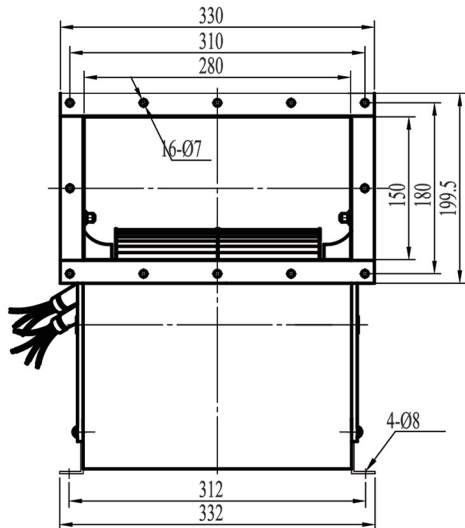

90° 出风
90° air outlet


0° 出风
0° air outlet

180° 出风
180° air outlet

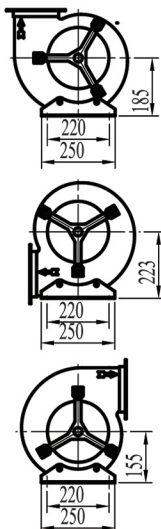




技术参数 Technical data

型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
QS2EC225A/102/III-1P	230	50/60	1.75	450	1300	2950	-	14	68

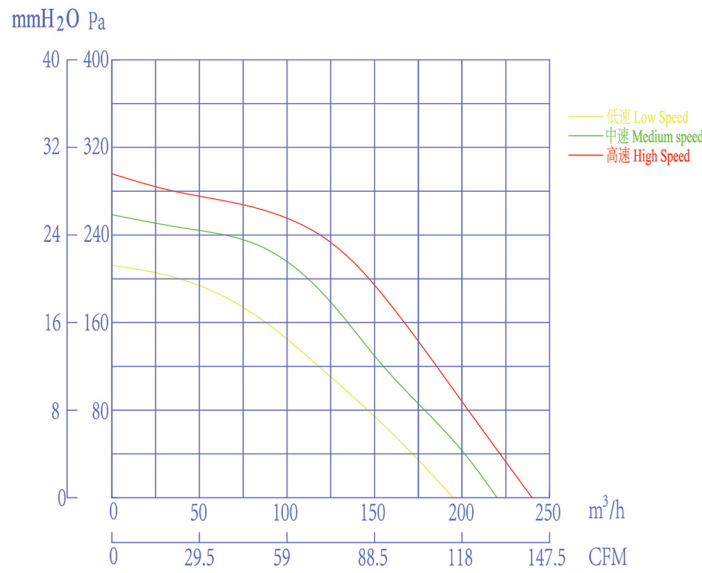

- 防护等级：IP54
- 绝缘等级：F
- 叶片材质：镀锌板
- 电机工作制：S1
- 轴承：免维护深沟球轴承
- 工作环境温度：-25°C - +60°C
- 工作电压：200V-277V/1P 24VDC/48VDC
- 调速方式：0~10V或PWM控制

- Type of Protection: IP54
- Insulation Class: F
- Blades: Galvanized sheet
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Perm.amb.temp.: -25°C - +60°C
- Operating Voltage: 200V - 277V/1P 24VDC/48VDC
- Std. Control: 0~10V or PWM Control

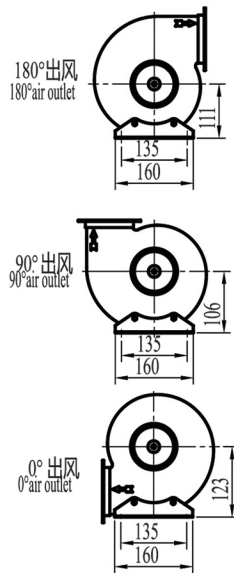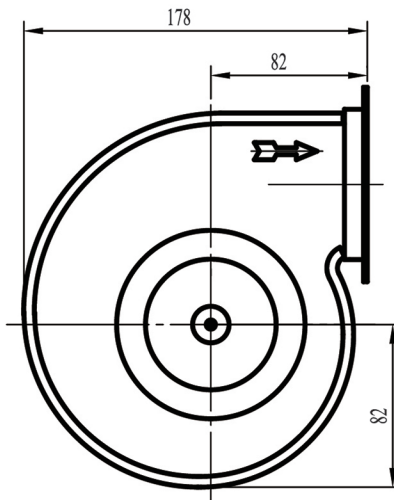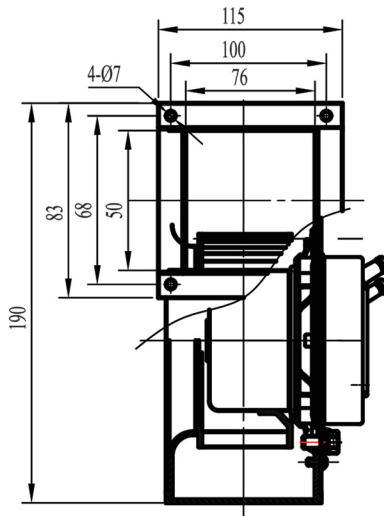

技术参数 Technical data

型号 Model	额定电压 Voltage V	频率 Frequency Hz	电 流 Current draw A	输入功率 Power input W	转 速 Speed/rpm r/min	最大风量 Air flow / max m³/h	许用静压 Static Pressure Pa	净重 N.W Kg	噪音 Noise level dB(A)
QD2EC120/072/VI-1P	230	50/60	0.3	41	2200	240	-	1.8	62
QD3DC120/072/VI	DC24	-	1.9	40	2200	240	-	2.3	62
QD4DC120/072/VI	DC48	-	0.95	40	2200	240	-	2.3	62

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN