


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN



EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN



AC 离心风机
AC CENTRIFUGAL FAN

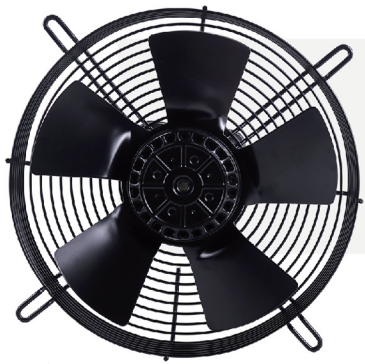



- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

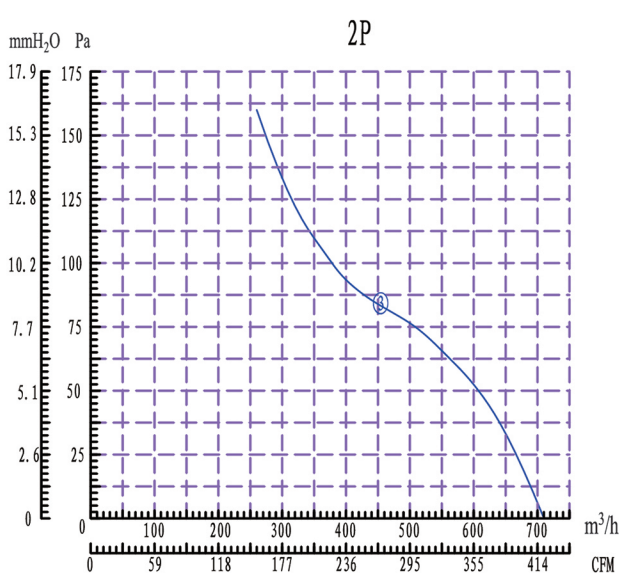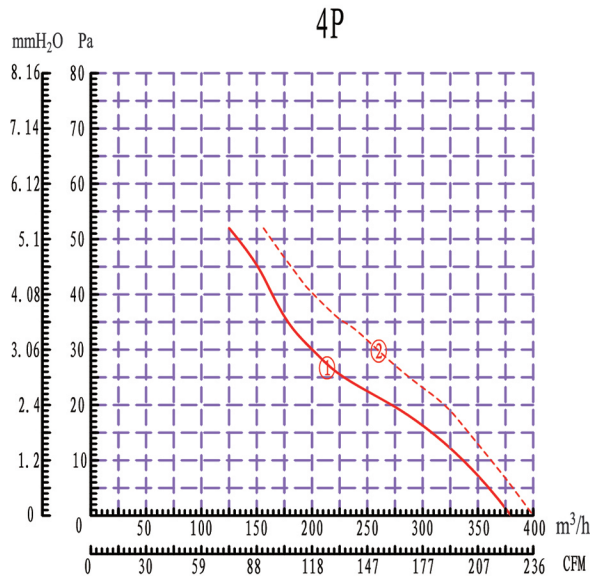

技术参数 Technical data											
	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	最大风量 / 许用静压 Air Volume Max / Max static pressure		净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	μF	m³/h	/ Pa	Kg
YWF4D-200-E5Z	①	380	50	0.15	35	1465	50	/	385	/ 30	2.0
YWF4E-200-E5Z	①	220	50	0.11	22	1400	50	2.5	385	/ 30	2.0
YWF4E-200-E5Z	②	230	60	0.11	25	1700	52	2.5	405	/ 40	2.0
YWF2D-200-E5Z	③	380	50	0.24	65	2740	77	/	710	/ 80	2.0
YWF2E-200-E5Z	③	220	50	0.25	55	2680	65	3	710	/ 80	2.0

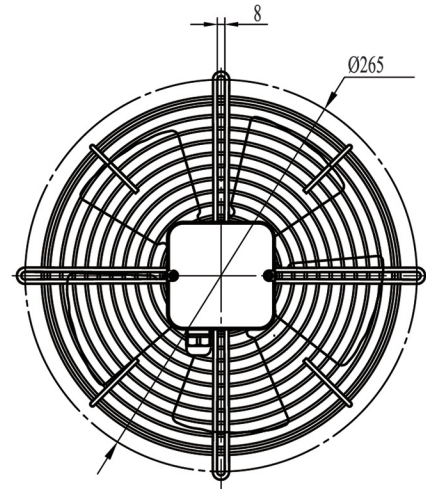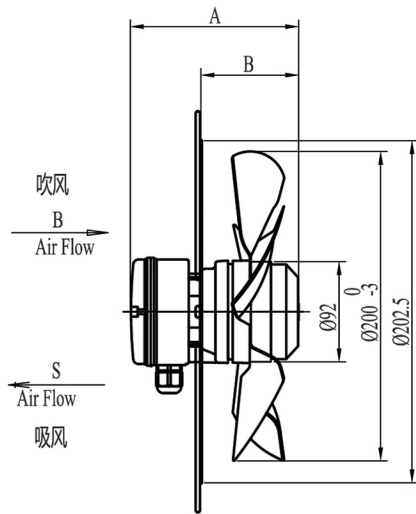

型号 MODEL	尺寸	
	A	B
YWF4D(E)-200S (B) -B5Z	140	75
YWF2D(E)-200S (B) -B5Z	145	80

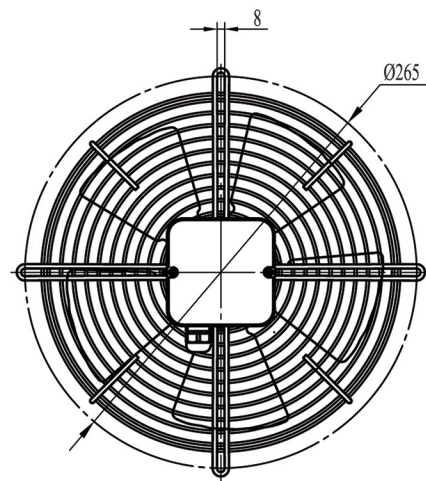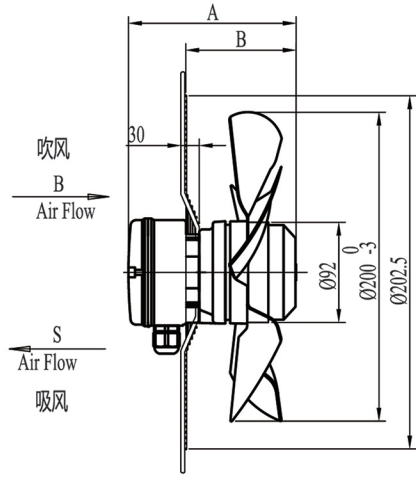

型号 MODEL	尺寸	
	A	B
YWF4D(E)-200S (B) -C5Z	140	105
YWF2D(E)-200S (B) -C5Z	145	110

技术参数 Technical data

						
Model NO.B	Model NO.C	Model NO.D	Model NO.E	Model NO.H	Model NO.G	Model NO.K
YWF4D(E)-200S(B)-B5Z	YWF4D(E)-200S(B)-C5Z	YWF4D(E)-200S(B)-D5Z	YWF4D(E)-200S(B)-E5Z	YWF4D(E)-200S(B)-H5Z	YWF4D(E)-200B-G5Z	/
YWF2D(E)-200S(B)-B5Z	YWF2D(E)-200S(B)-C5Z	YWF2D(E)-200S(B)-D5Z	YWF2D(E)-200S(B)-E5Z	YWF2D(E)-200S(B)-H5Z	YWF2D(E)-200B-G5Z	/

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN



轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN



EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN



AC 离心风机
AC CENTRIFUGAL FAN

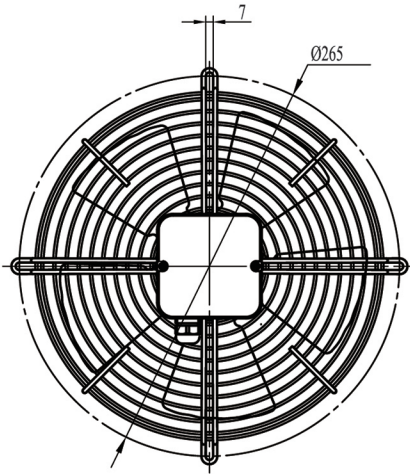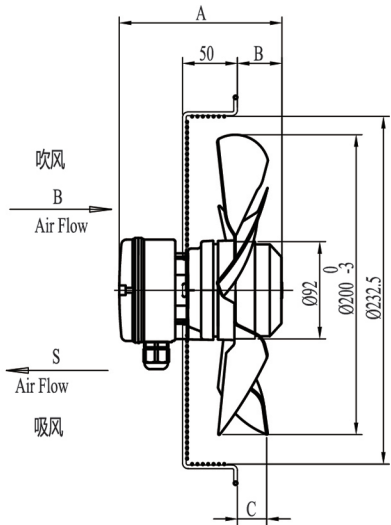


型号 MODEL	尺寸		
	A	B	C
YWF4D(E)-200S (B) -D5Z	140	29	17
YWF2D(E)-200S (B) -D5Z	145	34	22

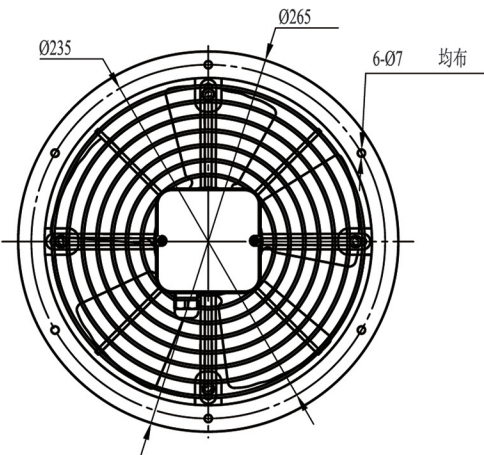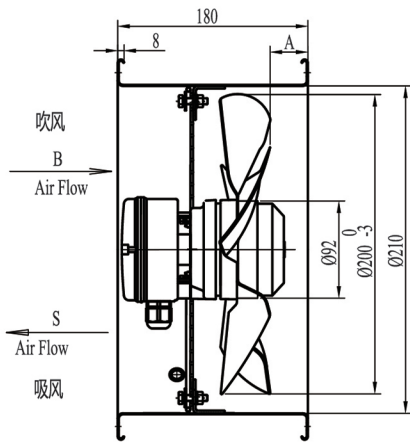

型号 MODEL	尺寸
	A
YWF4D(E)-200S (B) -H5Z	47
YWF2D(E)-200S (B) -H5Z	42

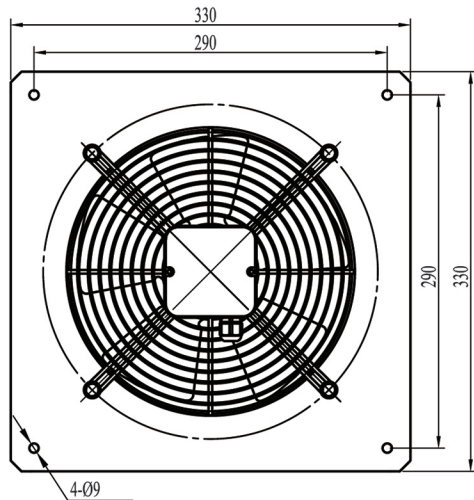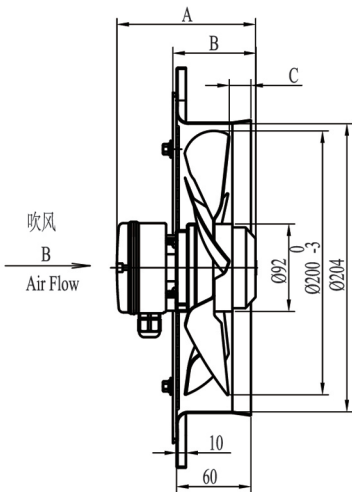


型号 MODEL	尺寸		
	A	B	C
YWF4D(E)-200B-G5Z	140	82	6
YWF2D(E)-200B-G5Z	145	87	6.5

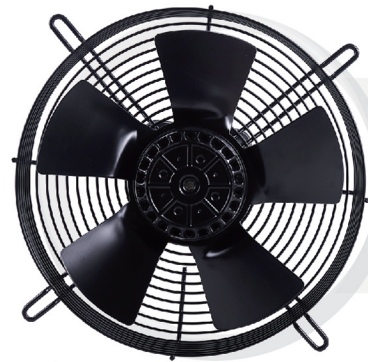


- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

4P

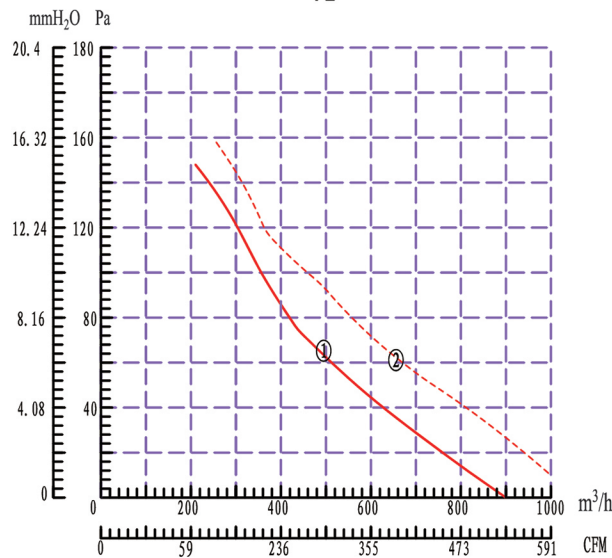

2P

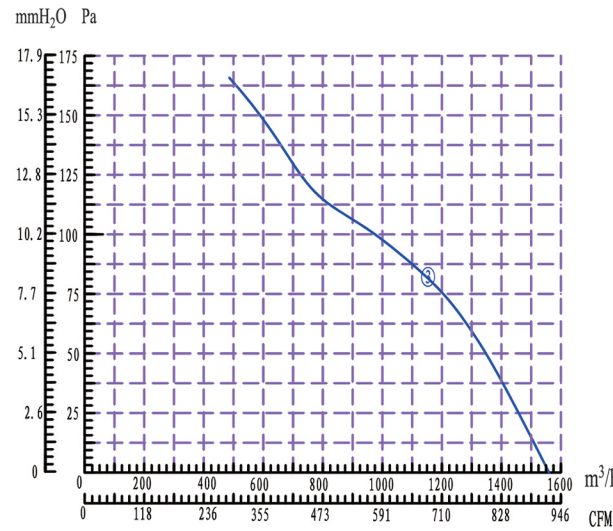

技术参数 Technical data

曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	最大风量 / 许用静压 Air Volume Max / Max.static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	m³/h / Pa	Kg
YWF4D-250-E5Z	①	380	50	0.18	50	1450	55	915 / 60	2.7
	②	400	60	0.25	60	1500	58	925 / 68	2.7
YWF4E-250-E5Z	①	220	50	0.23	50	1430	55	900 / 60	2.7
	②	230	60	0.22	55	1700	58	1080 / 70	2.7
YWF2D-250-E5Z	③	380	50	0.3	150	2600	72	1565 / 120	2.8
YWF2E-250-E5Z	③	220	50	0.65	135	2300	75	1565 / 120	2.8

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN