



轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN



EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

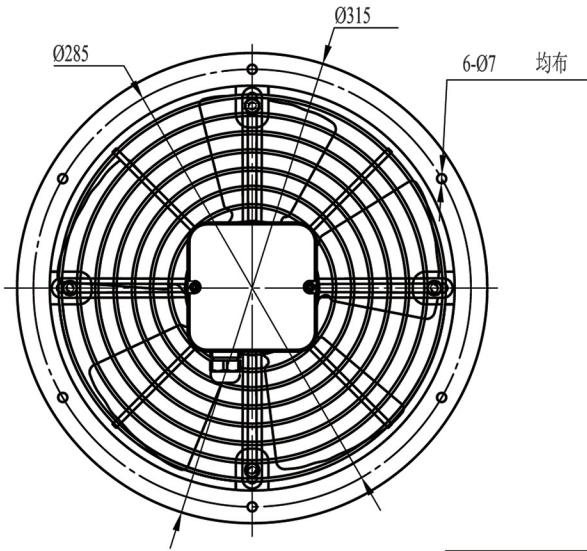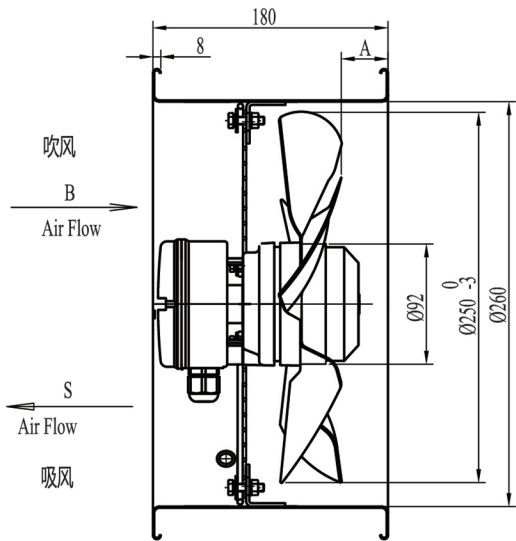

型号 MODEL	尺寸 A
YWF4D(E)-250S (B) -HSZ	41
YWF2D(E)-250S (B) -HSZ	31

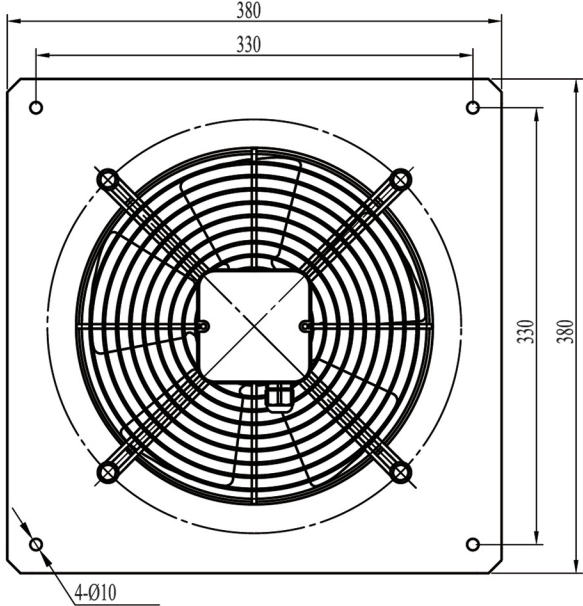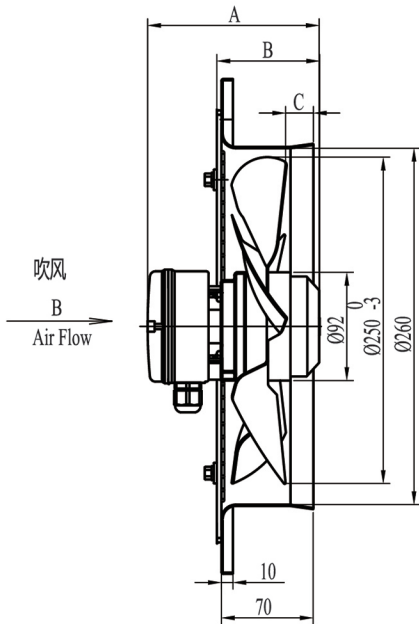


型号 MODEL	尺寸 A B C		
YWF4D(E)-250B-G5Z	145	82.5	5.5
YWF2D(E)-250B-G5Z	155	92.5	3




- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 钢板
- 工作环境温度: -40°C - +60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

4P

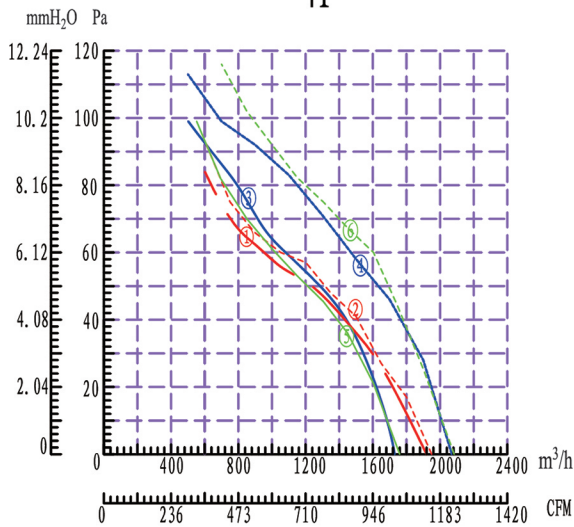

2P

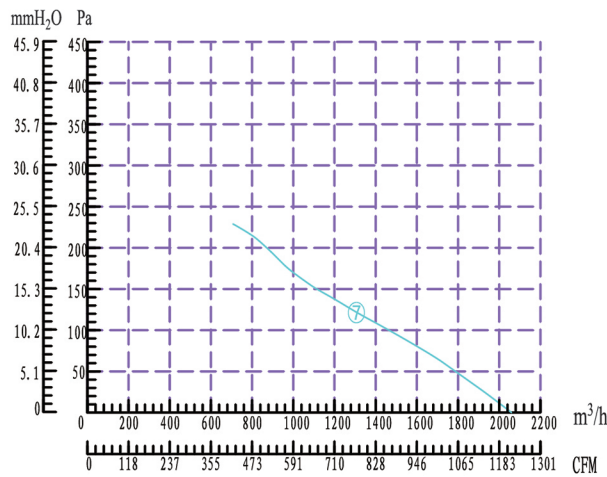

技术参数 Technical data

	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	最大风量 / 许用静压 Air Volume Max / Max static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF4D-300F-E5L	①	220	50	0.48	100	1325	60	2.5	1920 / 60	3.2
YWF4D-300-E5Z	②	380	50	0.24	100	1360	60	/	1950 / 60	3.2
YWF4E-300F-E5L	③	220	50	0.42	92	1365	60	2.5	1730 / 60	3.2
	④	230	60	0.53	121	1552	65	2.5	2070 / 70	3.2
YWF4D-300F-E5L	⑤	380	50	0.24	90	1385	60	/	1760 / 60	3.2
	⑥	400	60	0.21	105	1615	65	/	2084 / 70	3.2
YWF2D-300-E5L	⑦	380	50	0.5	250	2500	70	/	2065 / 100	3.3
YWF2E-300-E5L	⑦	220	50	0.85	180	2300	70	8	2065 / 105	3.3

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN



轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN



EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN



AC 离心风机
AC CENTRIFUGAL FAN

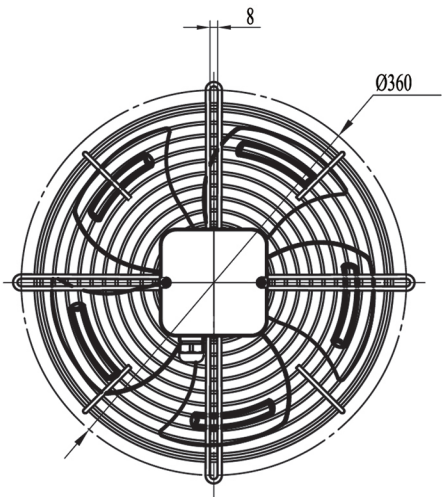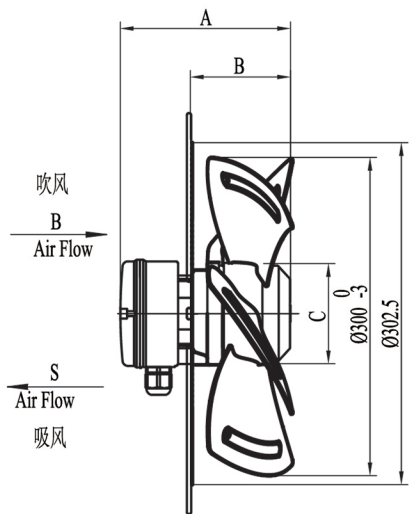



型号 MODEL	尺寸		
	A	B	C
YWF4D(E)-300FS (B) -B5L	155	90	92
YWF2D(E)-300S (B) -B5L	162	97	92

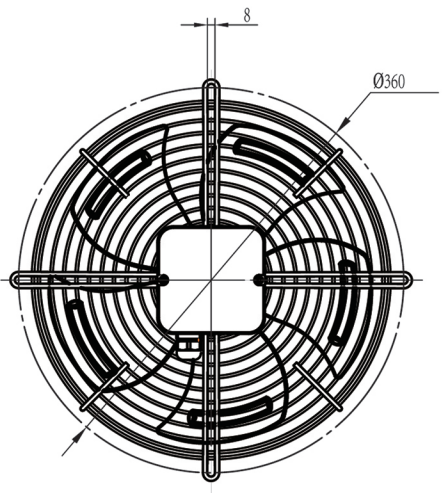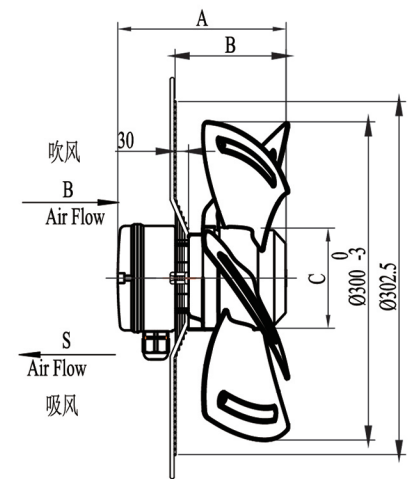



型号 MODEL	尺寸		
	A	B	C
YWF4D(E)-300FS (B) -C5L	155	120	92
YWF2D(E)-300S (B) -C5L	162	127	92

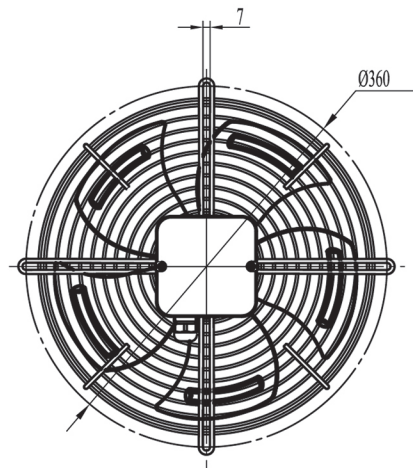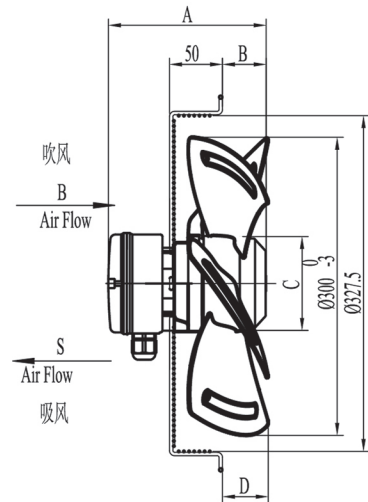

型号 MODEL	尺寸			
	A	B	C	D
YWF4D(E)-300FS (B) -D5L	155	40	92	40.5
YWF2D(E)-300S (B) -D5L	162	47	92	37

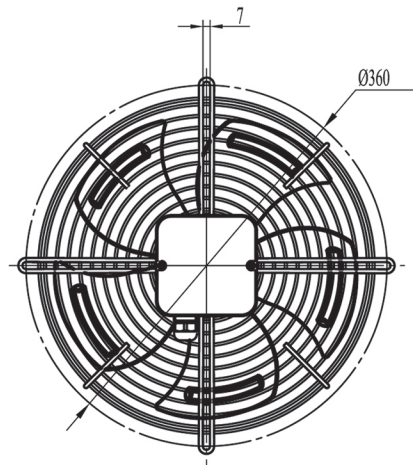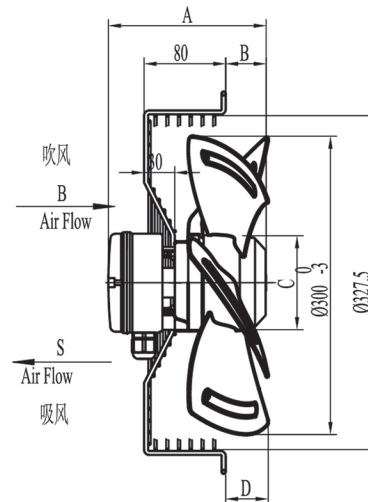

型号 MODEL	尺寸			
	A	B	C	D
YWF4D(E)-300FS (B) -E5L	155	40	92	40.5
YWF2D(E)-300S (B) -E5L	162	47	92	37

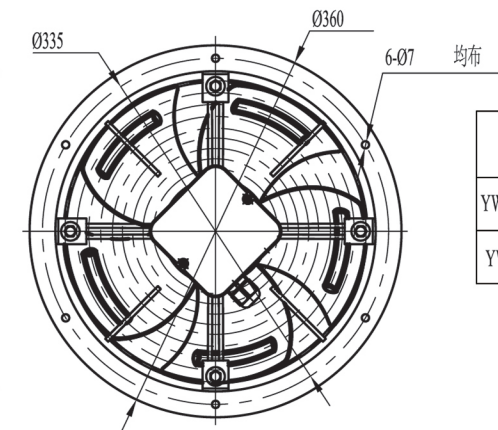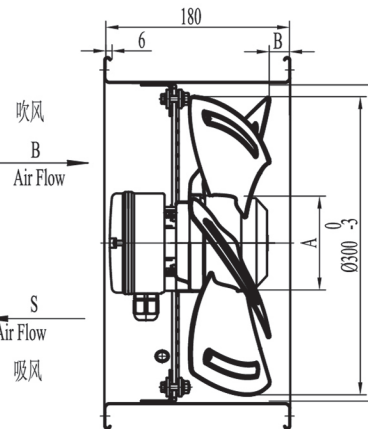

型号 MODEL	尺寸	
	A	B
YWF4D(E)-300FS (B) -H5L	92	20
YWF2D(E)-300S (B) -H5L	92	46.5

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN



轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN



EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN


AC 离心风机
AC CENTRIFUGAL FAN

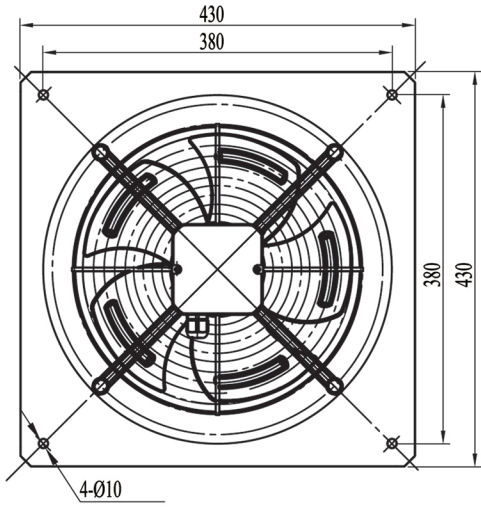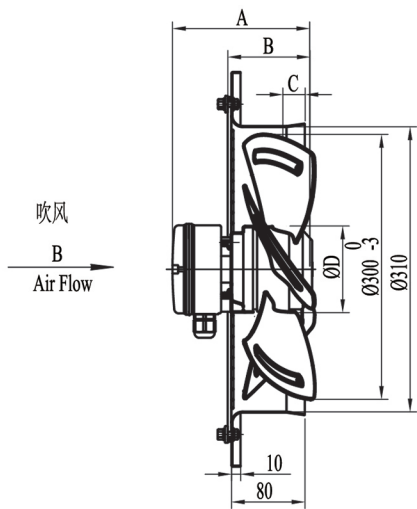

型号 MODEL	尺寸			
	A	B	C	D
YWF4D(E)-300FB-G5L	155	94	-10.5	92
YWF2D(E)-300B-G5L	162	101	7	92

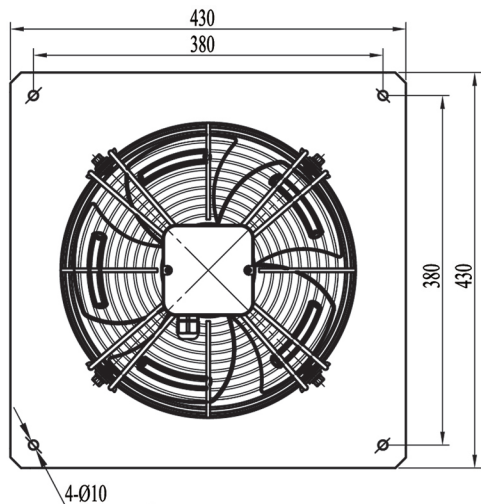
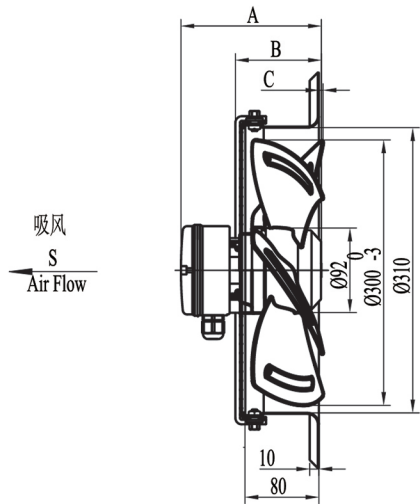


型号 MODEL	尺寸			
	A	B	C	D
YWF4D(E)-300FS-K5L	155	94	-4.5	92
YWF2D(E)-300S-K5L	162	101	7	92

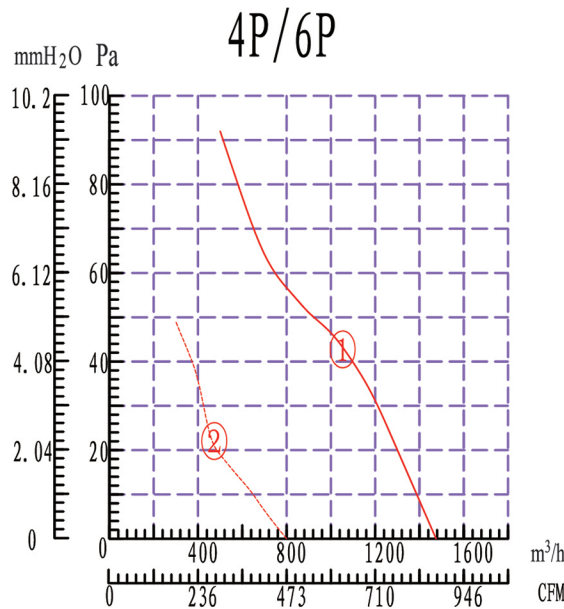

- 防护等级：IP54
- 绝缘等级：“B”“F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C- +60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

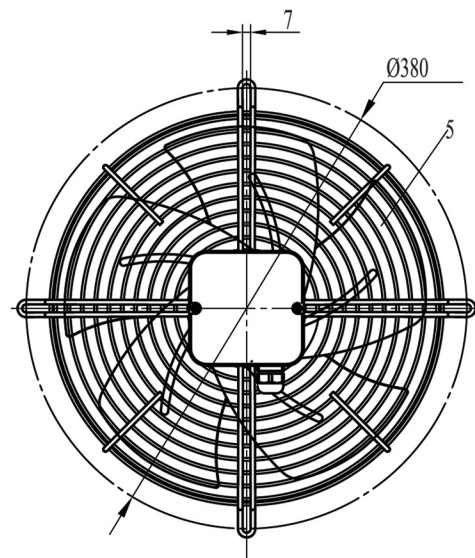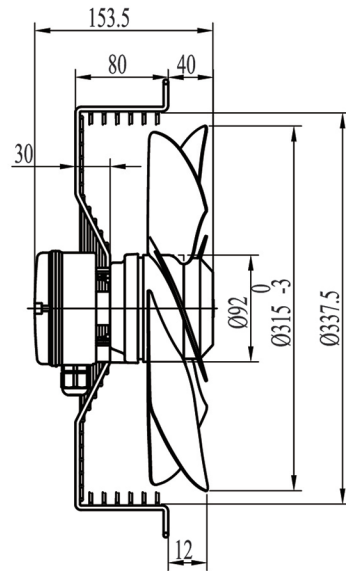

技术参数 Technical data

曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 / 许用静压 Air Volume / Max. static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	µF	m³/h / Pa	Kg
YWF4E-315S(B)-E5L	①	220	50	0.4	85	1380	2	1475 / 65	3.8
YWF4D-315S(B)-E5L	①	380	50	0.25	70	1400	/	1475 / 65	3.8
YWF6E-315S(B)-E5L	②	220	50	0.29	60	950	3	800 / 45	3.8

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN