

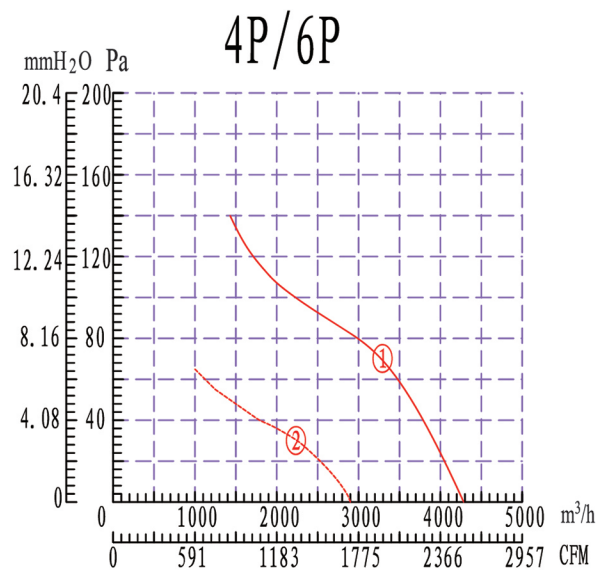


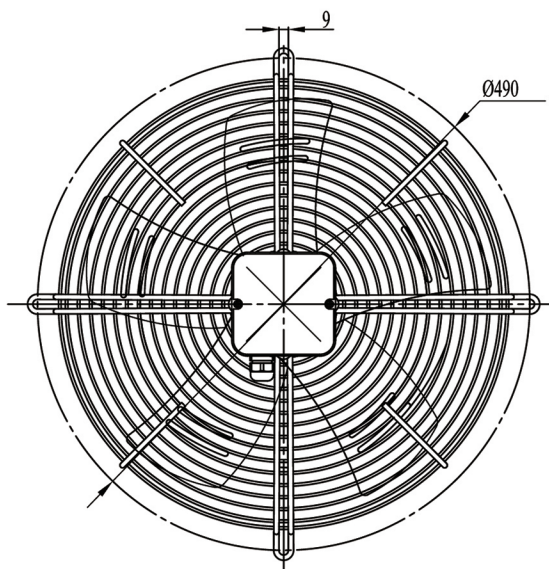

- 防护等级：IP54
 - 绝缘等级：“B” “F”
 - 工作方式：S1
 - 轴承：免维护轴承
 - 叶片材质：钢板
 - 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
 - Insulation Class: “B”“F”
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Blades: steel plate
 - Perm.amb.temp.: -40°C - +60°C

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C - +60°C


- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

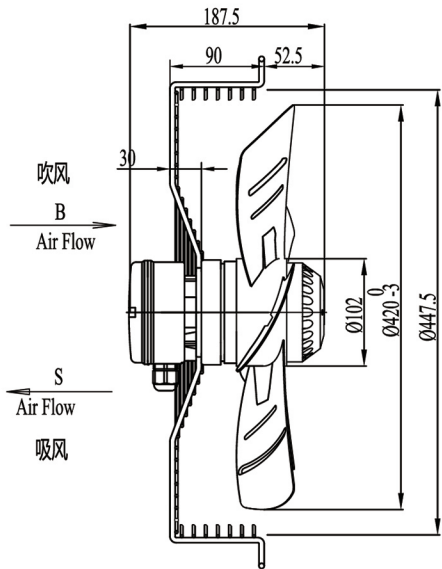

技术参数 Technical data

	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 / 许用静压 Air Volume / Max.static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF4D-450-E5L	①	380	50	0.6	280	1365	70	/	4706 / 110	6.8
	②	400	60	0.6	330	1540	72	/	5522 / 115	6.8
YWF4E-450-E5L	①	220	50	1.15	270	1360	70	8	4706 / 110	6.8
	②	230	60	1.8	400	1500	72	10	5522 / 115	6.8
YWF6D-450-E5L	③	380	50	0.5	147	940	55	/	3680 / 60	6.8
	④	400	60	0.46	182	1090	58	/	4380 / 65	6.8
YWF6E-450-E5L	⑤	220	50	0.79	155	930	55	6	3608 / 60	6.8
	⑥	230	60	0.89	194	1090	58	6	4358 / 65	6.8
YWF4D-450M-E5L	⑦	380	50	0.7	320	1320	75	/	5890 / 120	6.8
	⑧	400	60	1.15	580	1400	77	/	6185 / 110	6.8
YWF4E-450M-E5L	⑦	220	50	2.2	460	1350	75	12	5890 / 120	6.8
	⑧	230	60	2.3	480	1680	77	12	6185 / 110	6.8
YWF4E-450G-E7L	⑨	220	50	2.93	640	1320	77	15	7380 / 100	10.5
	⑨	400▲	50	1.15	567	1370	77	/	7380 / 115	10.5
YWF4D-450G-E7L	⑩	400Y	50	0.73	400	1020	68	/	5700 / 50	10.5
	⑪	220	50	0.91	198	920	60	6	4800 / 50	10.2
YWF6D-450G-E7L	⑪	400▲	50	0.45	201	930	60	/	4800 / 50	10.2
YWF4D-450T-E7L	⑫	380	50	1.45	620	1370	72	/	6705 / 150	10.5
	⑬	380	50	0.75	230	935	60	/	5200 / 60	10
YWF6D-450T-E7L	⑭	400	60	0.70	290	1085	64	/	6000 / 65	10
	⑮	380	50	0.75	350	1320	75	/	5500 / 100	6.8
YWF4D-450F-E7F	⑯	380	50	0.86	395	1360	75	/	5940 / 100	10
YWF4D-450F-E7F	⑰	400	60	0.9	460	1600	77	/	5600 / 110	9.8
YWF4E-450F-E7F	⑮	220	50	1.85	400	1370	75	10	5550 / 100	10
YWF6D-450F-E7F	⑱	400	60	0.37	165	1070	64	/	3820 / 70	6.8
YWF6E-450F-E7F	⑲	230	60	0.69	150	1030	64	4	3680 / 60	6.8

技术参数 Technical data

	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 / 许用静压 Air Volume / Max static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF4D-420S(B)-E5L	①	380	50	0.55	210	1350	68	/	4290 / 110	5.4
YWF6D-420S(B)-E5L	②	380	50	0.3	135	950	58	/	2900 / 65	5.4




轴流风机
AL FAN

离心风机
EC CENTRIFUGAL FAN


离心风机
EC SHADED-POLE MOTOR

外转子轴流风机
AC AXIAL FAN


离心风机
AC CENTRIFUGAL FAN

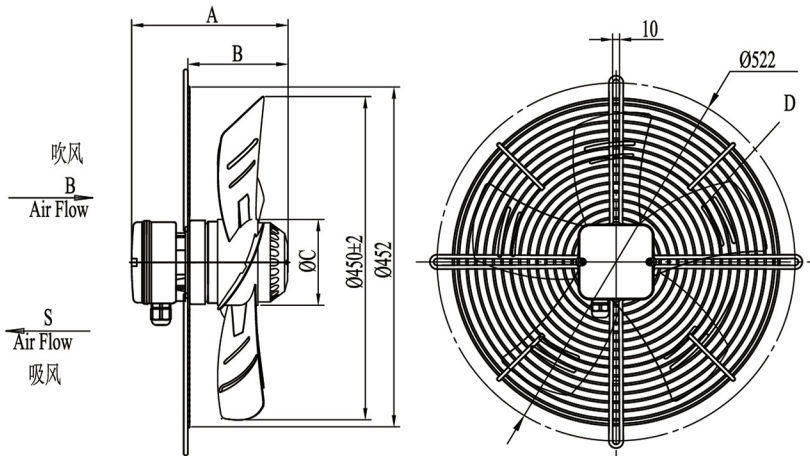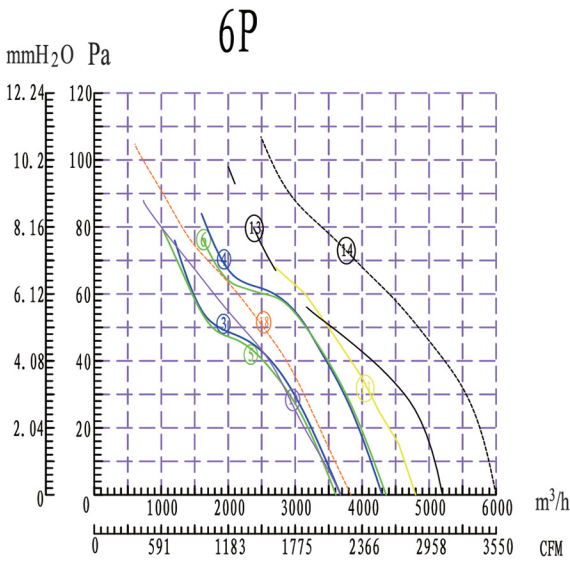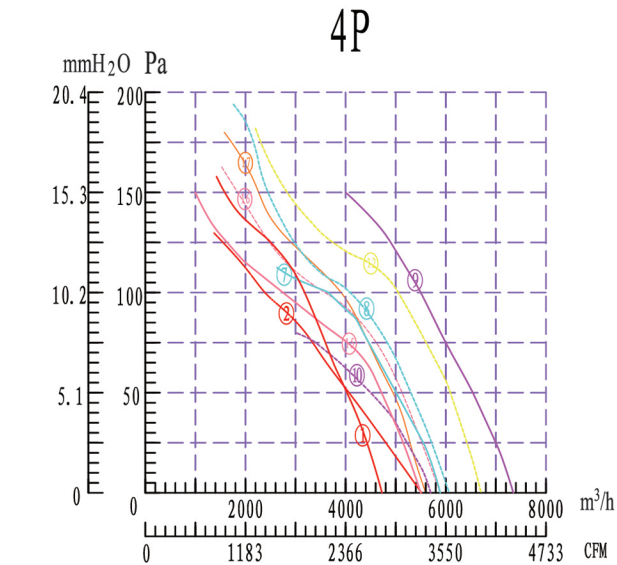

型号 MODEL	尺寸				叶片数量
	A	B	C	D	
YWF4D(E)-450S(B)-B5L	200	130	102	5	
YWF6D(E)-450S(B)-B5L	200	130	102	5	
YWF4D(E)-450MS(B)-B5L	200	130	102	5	
YWF6D(E)-450GS(B)-B7L	214	144	138	7	
YWF4D(E)-450GS(B)-B7L	214	144	138	7	
YWF4D-450TS(B)-B7L	214	144	138	7	
YWF6D-450TS(B)-B7F	200	130	138	7	
YWF4D(E)-450FS(B)-B7F	200	130	102	7	
	214	144	138		
YWF6D(E)-450FS(B)-B7F	200	130	102	7	

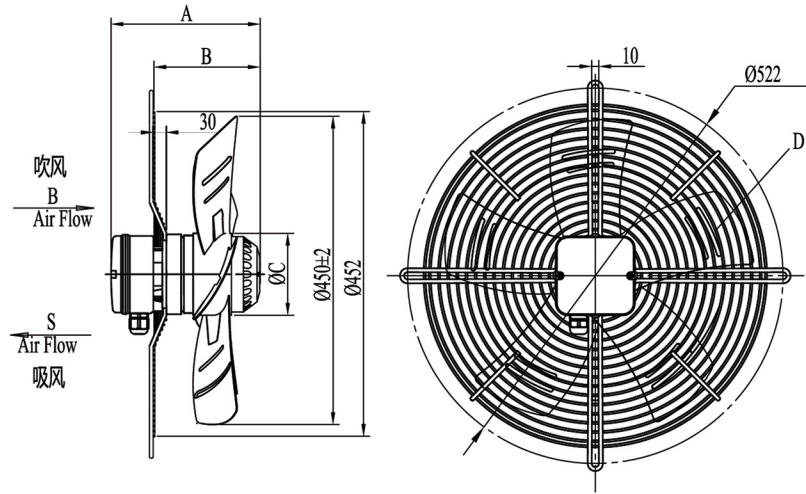


型号 MODEL	尺寸				叶片数量
	A	B	C	D	
YWF4D(E)-450S(B)-C5L	200	160	102	5	
YWF6D(E)-450S(B)-C5L	200	160	102	5	
YWF4D(E)-450MS(B)-C5L	200	160	102	5	
YWF6D(E)-450GS(B)-C7L	214	174	138	5	
YWF4D(E)-450GS(B)-C7L	214	174	138	7	
YWF6D-450TS(B)-C7L	214	174	138	7	
YWF4D(E)-450FS(B)-C7F	200	160	102	7	
	214	174	138		
YWF6D(E)-450FS(B)-C7F	200	160	102	7	

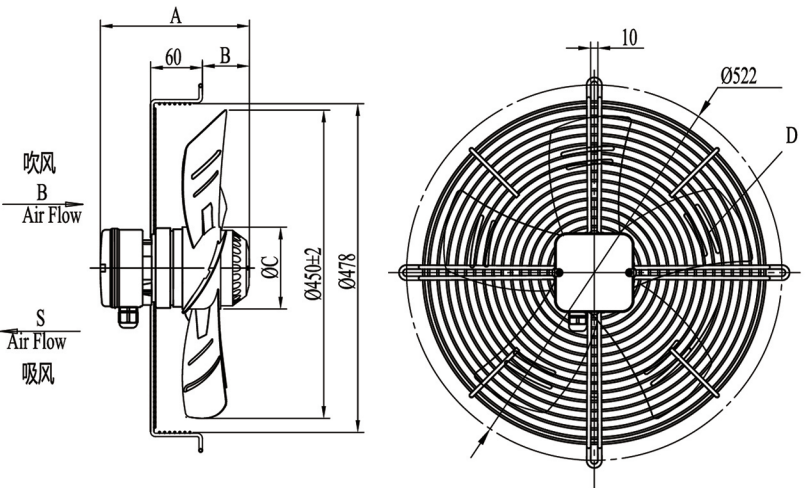

型号 MODEL	尺寸				叶片数量
	A	B	C	D	
YWF4D(E)-450S(B)-D5L	200	75	102	5	
YWF6D(E)-450S(B)-D5L	200	75	102	5	
YWF4D(E)-450MS(B)-D5L	200	75	102	5	
YWF6D(E)-450GS(B)-D7L	214	89	138	7	
YWF4D(E)-450GS(B)-D7L	214	89	138	7	
YWF4D-450TS(B)-D7L	214	89	138	7	
YWF6D-450TS(B)-D7L	200	75	138	7	
YWF4D(E)-450FS(B)-D7F	200	75	102	7	
	214	89	138		
YWF6D(E)-450FS(B)-D7F	200	75	102	7	

技术参数 Technical data

Model NO.B	Model NO.C	Model NO.D	Model NO.E	Model NO.H	Model NO.G	Model NO.K
YWF4D(E)-450S(B)-B5L	YWF4D(E)-450S(B)-C5L	YWF4D(E)-450S(B)-D5L	YWF4D(E)-450S(B)-E5L	YWF4D(E)-450S(B)-H5L	YWF4D(E)-450B-G5L	YWF4D(E)-450S-K5L
YWF6D(E)-450S(B)-B5L	YWF6D(E)-450S(B)-C5L	YWF6D(E)-450S(B)-D5L	YWF6D(E)-450S(B)-E5L	YWF6D(E)-450S(B)-H5L	YWF6D(E)-450B-G5L	YWF6D(E)-450S-K5L
YWF4D(E)-450MS(B)-B5L	YWF4D(E)-450MS(B)-C5L	YWF4D(E)-450MS(B)-D5L	YWF4D(E)-450MS(B)-E5L	YWF4D(E)-450MS(B)-H5L	YWF4D(E)-450MB-G5L	YWF4D(E)-450MS-K5L
YWF6D(E)-450GS(B)-B7L	YWF6D(E)-450GS(B)-C5L	YWF6D(E)-450GS(B)-D5L	YWF6D(E)-450GS(B)-E5L	YWF6D(E)-450GS(B)-H5L	YWF6D(E)-450GB-G5L	YWF6D(E)-450GS-K5L
YWF4D(E)-450GS(B)-B7L	YWF4D(E)-450GS(B)-C7L	YWF4D(E)-450GS(B)-D7L	YWF4D(E)-450GS(B)-E7L	YWF4D(E)-450GS(B)-H7L	YWF4D(E)-450GB-G7L	YWF4D(E)-450GS-K7L
YWF4D-450TS(B)-B7L	YWF4D-450TS(B)-C7L	YWF4D-450TS(B)-D7L	YWF4D-450TS(B)-E7L	YWF4D-450TS(B)-H7L	YWF4D-450TB-G7L	YWF4D-450TS-K7L
YWF6D-450TS(B)-B7L	YWF6D-450TS(B)-C7L	YWF6D-450TS(B)-D7L	YWF6D-450TS(B)-E7L	YWF6D-450TS(B)-H7L	YWF6D-450TB-G7L	YWF6D-450TS-K7L
YWF4D(E)-450FS(B)-B7F	YWF4D(E)-450FS(B)-C7F	YWF4D(E)-450FS(B)-D7F	YWF4D(E)-450FS(B)-E7F	YWF4D(E)-450FS(B)-H7F	YWF4D(E)-450FB-G7F	YWF4D(E)-450FS-K7F
YWF6D(E)-450FS(B)-B7F	YWF6D(E)-450FS(B)-C7F	YWF6D(E)-450FS(B)-D7F	YWF6D(E)-450FS(B)-E7F	YWF6D(E)-450FS(B)-H7F	YWF6D(E)-450FB-G7F	YWF6D(E)-450FS-K7F

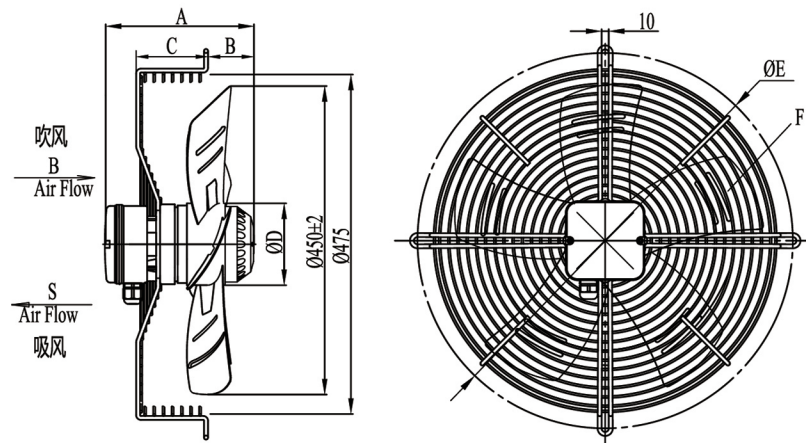

型号 MODEL	尺寸						叶片数量
	A	B	C	D	E	F	
YWF4D(E)-450S(B)-E5L	200	70	90	102	522	5	
YWF6D(E)-450S(B)-E5L	200	70	90	102	522	5	
YWF4D(E)-450MS(B)-E5L	200	70	90	102	522	5	
YWF6D(E)-450GS(B)-E7L	214	89	95	138	515	7	
YWF4D(E)-450GS(B)-E7L	214	89	95	138	515	7	
YWF4D-450TS(B)-E7L	214	89	95	138	515	7	
YWF6D-450TS(B)-E7L	214	75	95	138	515	7	
YWF4D(E)-450FS(B)-E7F	200	70	90	102	522	7	
	214	89	95	138	515		
YWF6D(E)-450FS(B)-E7F	200	70	90	102	522	7	

轴流风机
AL FAN

离心风机
EC CENTRIFUGAL FAN

离心风机
EC SHADED-POLE MOTOR

外转子轴流风机
AC AXIAL FAN

离心风机
AC CENTRIFUGAL FAN


AL FAN
轴流风机

EC CENTRIFUGAL FAN
离心风机

EC SHADED-POLE MOTOR
离心风机

AC AXIAL FAN
外转子轴流风机


AC CENTRIFUGAL FAN
离心风机

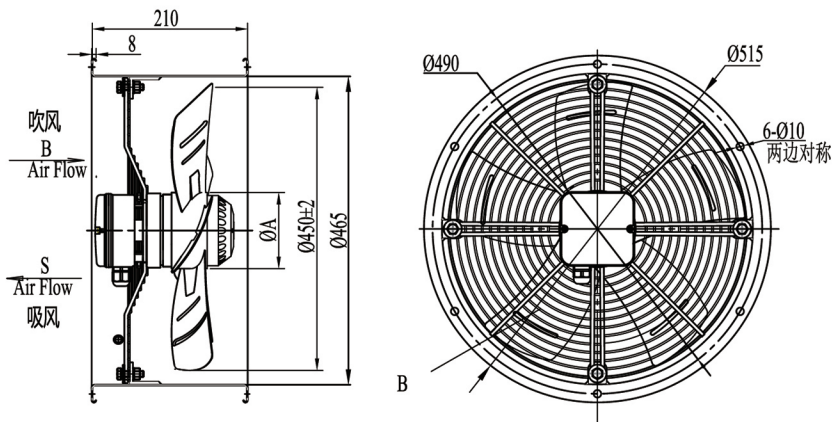

型号 MODEL	尺寸		叶片数量
	A	B	
YWF4D(E)-450S(B)-H5L	102	5	
YWF6D(E)-450S(B)-H5L	102	5	
YWF4D(E)-450MS(B)-H5L	102	5	
YWF6D(E)-450GS(B)-H7L	138	5	
YWF4D(E)-450GS(B)-H7L	138	7	
YWF4D-450TS(B)-H7L	138	7	
YWF6D-450TS(B)-H7L	138	7	
YWF4D(E)-450FS(B)-H7F	102	7	
	138		
YWF6D(E)-450FS(B)-H7F	102	7	




- 防护等级：IP54
 - 绝缘等级：“B” “F”
 - 工作方式：S1
 - 轴承：免维护轴承
 - 叶片材质：钢板
 - 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
 - Insulation Class: “B” “F”
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Blades: steel plate
 - Perm.amb.temp.: -40°C - +60°C

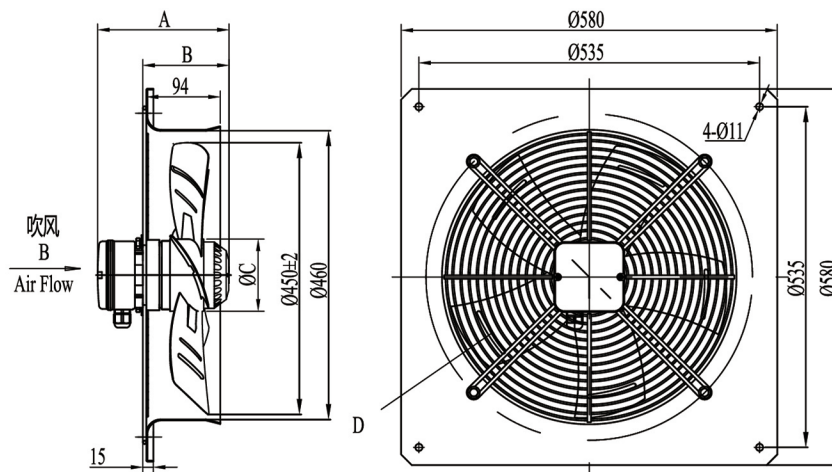

型号 MODEL	尺寸			叶片数量
	A	B	C	
YWF4D(E)-450B-G5L	200	135	102	5
YWF6D(E)-450B-G5L	200	135	102	5
YWF4D(E)-450MB-G5L	200	135	102	5
YWF6D(E)-450GB-G7L	214	184	138	7
YWF4D(E)-450GB-G7L	214	184	138	7
YWF4D-450TB-G7L	214	184	138	7
YWF6D-450TB-G7L	200	170	138	7
YWF4D(E)-450FB-G7F	200	135	102	7
	214	184	138	
YWF6D(E)-450FB-G7F	200	135	102	7

技术参数 Technical data

型号 MODEL	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	最大风量 / 许用静压 Air Volume / Max.static pressure	净重 N.W
	#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF4D-500-E5L	①	380	50	0.95	460	1330	70	/	6700 / 135	9.8
	②	400	60	1.25	650	1550	72	/	6800 / 120	9.8
YWF4E-500-E5L	①	220	50	2.1	480	1340	70	15	6700 / 125	9.8
	②	230	60	2.85	600	1500	72	15	6800 / 120	9.8
YWF6D-500-E5L	③	380	50	0.7	250	920	58	/	5300 / 85	9.6
	④	400	60	0.4	185	1080	60	/	4630 / 80	9.6
YWF6E-500-E5L	⑤	220	50	0.68	148	920	58	6	4410 / 75	9.6
	④	230	60	1.0	210	1100	60	6	4630 / 80	9.6
YWF4D-500M-E6L	⑥	380	50	1.38	520	1400	78	/	8000 / 105	10.5
	⑦	400	60	1.45	850	1600	80	/	8400 / 90	10.5
YWF4E-500M-E6L	⑥	220	50	2.6	560	1360	78	15	8000 / 105	10.5
	⑦	230	60	3.9	820	1600	80	15	8400 / 90	10.5
YWF4E-500G-E7L	⑧	220	50	3.67	819	1280	76	15	9000 / 105	12.8
YWF4D-500G-E7L	⑧	400 ▲	50	1.59	830	1360	78	/	9000 / 115	12.8
YWF6E-500G-E7L	⑨	400Y	50	0.98	514	1000	72	/	7100 / 65	12.8
YWF6D-500G-E7L	⑩	220	50	1.34	304	920	68	10	6000 / 50	12.5
YWF6D-500G-E7L	⑩	400 ▲	50	0.61	295	900	68	/	6000 / 60	12.5
YWF4D-500T-E7L	⑪	380	50	1.88	850	1340	74	/	8380 / 170	10.5
YWF6D-500T-E7L	⑫	380	50	0.85	330	900	68	/	6300 / 100	10.2
YWF4D-500-E4F	⑬	380	50	1.0	500	1350	68	/	6580 / 120	10.4
YWF4E-500-E4F	⑬	220	50	3.5	580	1300	68	12	6580 / 120	10.4
YWF6D-500-E4F	⑭	380	50	0.48	175	940	58	/	4430 / 60	9.8
YWF4D-500F-E7F	⑮	380	50	0.85	400	1350	72	/	7800 / 100	9.8
YWF6D-500F-E7F	⑯	380	60	0.7	250	1100	63	/	5500 / 80	9.8

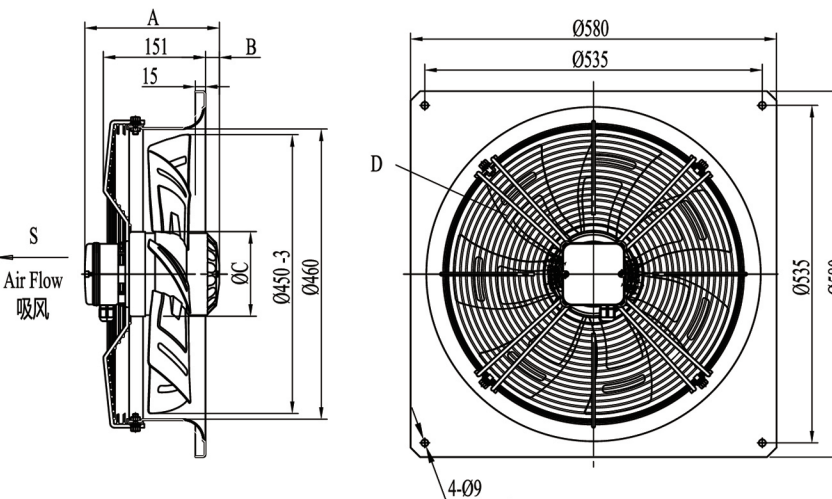

型号 MODEL	尺寸			叶片数量
	A	B	C	
YWF4D(E)-450S-K5L	200	20.5	102	5
YWF6D(E)-450S-K5L	200	20.5	102	5
YWF4D(E)-450MS-K5L	200	20.5	102	5
YWF6D(E)-450GS-K7L	214	34.5	138	7
YWF4D(E)-450GS-K7L	214	34.5	138	7
YWF4D-450TS-K7L	214	34.5	138	7
YWF6D-450TS-K7L	200	20.5	138	7
YWF4D(E)-450FS-K7F	200	20.5	102	7
	214	34.5	138	
YWF6D(E)-450FS-K7F	200	20.5	102	7

AL FAN
轴流风机

EC CENTRIFUGAL FAN
离心风机

EC SHADED-POLE MOTOR
离心风机

AC AXIAL FAN
外转子轴流风机

AC CENTRIFUGAL FAN
离心风机