



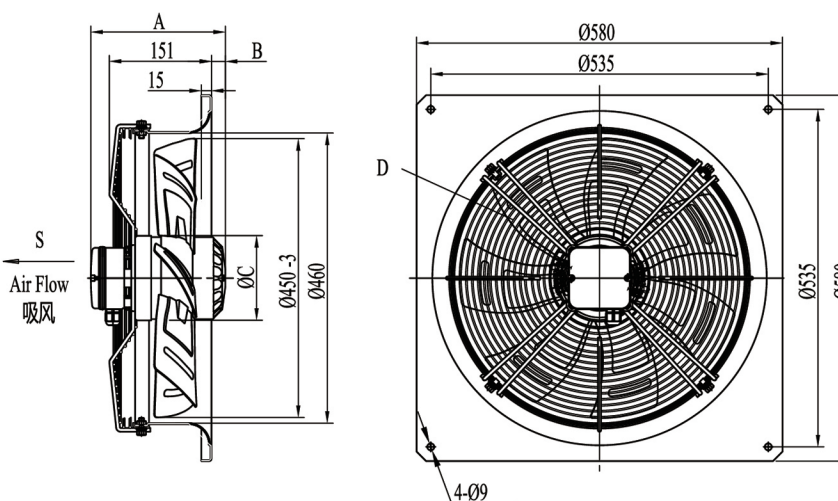

型号 MODEL	尺寸	叶片数量
	A	B
YWF4D(E)-450S(B)-H5L	102	5
YWF6D(E)-450S(B)-H5L	102	5
YWF4D(E)-450MS(B)-H5L	102	5
YWF6D(E)-450GS(B)-H7L	138	5
YWF4D(E)-450GS(B)-H7L	138	7
YWF4D-450TS(B)-H7L	138	7
YWF6D-450TS(B)-H7L	138	7
YWF4D(E)-450FS(B)-H7F	102	7
	138	
YWF6D(E)-450FS(B)-H7F	102	7

型号 MODEL	尺寸			叶片数量
	A	B	C	
YWF4D(E)-450B-G5L	200	135	102	5
YWF6D(E)-450B-G5L	200	135	102	5
YWF4D(E)-450MB-G5L	200	135	102	5
YWF6D(E)-450GB-G7L	214	184	138	7
YWF4D(E)-450GB-G7L	214	184	138	7
YWF4D-450TB-G7L	214	184	138	7
YWF6D-450TB-G7L	200	170	138	7
YWF4D(E)-450FB-G7F	200	135	102	7
	214	184	138	
YWF6D(E)-450FB-G7F	200	135	102	7

型号 MODEL	尺寸			叶片数量
	A	B	C	
YWF4D(E)-450S-K5L	200	20.5	102	5
YWF6D(E)-450S-K5L	200	20.5	102	5
YWF4D(E)-450MS-K5L	200	20.5	102	5
YWF6D(E)-450GS-K7L	214	34.5	138	7
YWF4D(E)-450GS-K7L	214	34.5	138	7
YWF4D-450TS-K7L	214	34.5	138	7
YWF6D-450TS-K7L	200	20.5	138	7
YWF4D(E)-450FS-K7F	200	20.5	102	7
	214	34.5	138	
YWF6D(E)-450FS-K7F	200	20.5	102	7

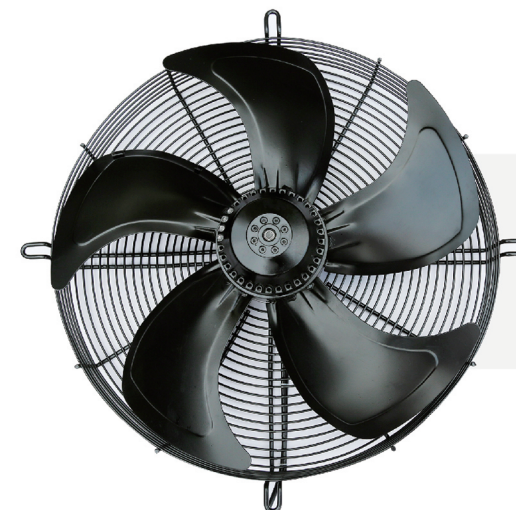

- **防护等级:** IP54
- **绝缘等级:** “B” “F”
- **工作方式:** S1
- **轴承:** 免维护轴承
- **叶片材质:** 钢板
- **工作环境温度:** -40°C ~ +60°C
- **Type of Protection:** IP54
- **Insulation Class:** “B”“F”
- **Mode of Operation:** S1
- **Bearings:** Maintenance-free ball bearings
- **Blades:** steel plate
- **Perm.amb.temp.:** -40°C - +60°C

技术参数 Technical data											
型号 MODEL	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	最大风量 / 许用静压 Air Volume / Max.static pressure		净重 N.W
	#	V	Hz	A	W	RPM	dB	μF	m³/h	/ Pa	Kg
YWF4D-500-E5L	①	380	50	0.95	460	1330	70	/	6700	/ 135	9.8
	②	400	60	1.25	650	1550	72	/	6800	/ 120	9.8
YWF4E-500-E5L	①	220	50	2.1	480	1340	70	15	6700	/ 125	9.8
	②	230	60	2.85	600	1500	72	15	6800	/ 120	9.8
YWF6D-500-E5L	③	380	50	0.7	250	920	58	/	5300	/ 85	9.6
	④	400	60	0.4	185	1080	60	/	4630	/ 80	9.6
YWF6E-500-E5L	⑤	220	50	0.68	148	920	58	6	4410	/ 75	9.6
	④	230	60	1.0	210	1100	60	6	4630	/ 80	9.6
YWF4D-500M-E6L	⑥	380	50	1.38	520	1400	78	/	8000	/ 105	10.5
	⑦	400	60	1.45	850	1600	80	/	8400	/ 90	10.5
YWF4E-500M-E6L	⑥	220	50	2.6	560	1360	78	15	8000	/ 105	10.5
	⑦	230	60	3.9	820	1600	80	15	8400	/ 90	10.5
YWF4E-500G-E7L	⑧	220	50	3.67	819	1280	76	15	9000	/ 105	12.8
YWF4D-500G-E7L	⑧	400 ▲	50	1.59	830	1360	78	/	9000	/ 115	12.8
	⑨	400Y	50	0.98	514	1000	72	/	7100	/ 65	12.8
YWF6E-500G-E7L	⑩	220	50	1.34	304	920	68	10	6000	/ 50	12.5
YWF6D-500G-E7L	⑩	400 ▲	50	0.61	295	900	68	/	6000	/ 60	12.5
YWF4D-500T-E7L	⑪	380	50	1.88	850	1340	74	/	8380	/ 170	10.5
YWF6D-500T-E7L	⑫	380	50	0.85	330	900	68	/	6300	/ 100	10.2
YWF4D-500-E4F	⑬	380	50	1.0	500	1350	68	/	6580	/ 120	10.4
YWF4E-500-E4F	⑬	220	50	3.5	580	1300	68	12	6580	/ 120	10.4
YWF6D-500-E4F	⑭	380	50	0.48	175	940	58	/	4430	/ 60	9.8
YWF4D-500F-E7F	⑮	380	50	0.85	400	1350	72	/	7800	/ 100	9.8
YWF6D-500F-E7F	⑯	380	60	0.7	250	1100	63	/	5500	/ 80	9.8




轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN




AC 离心风机
AC CENTRIFUGAL FAN

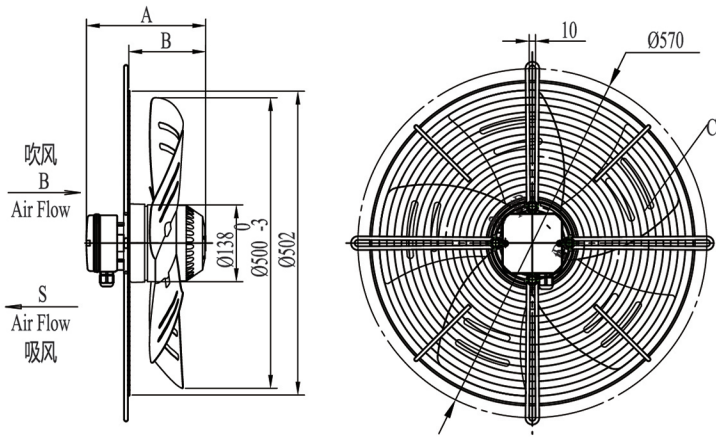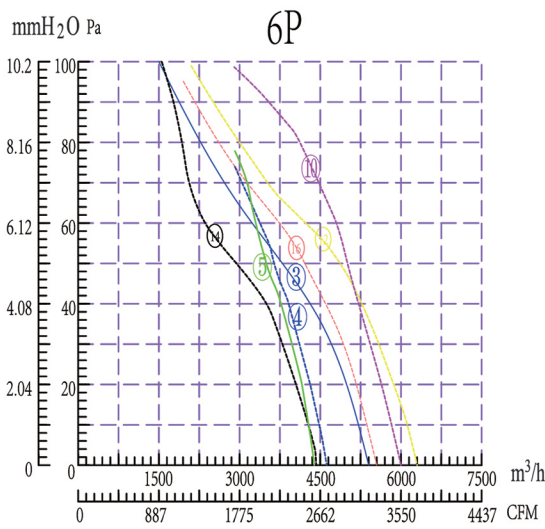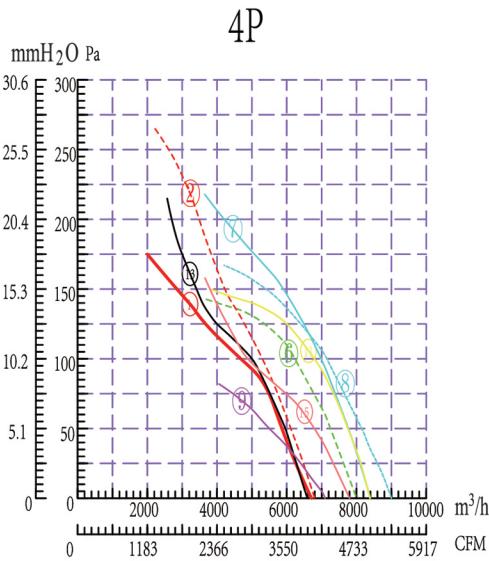

型号 MODEL	尺寸		叶片数量
	A	B	
YWF4D(E)-500S(B)-B5L	200	130	5
YWF6D(E)-500S(B)-B5L	200	130	5
YWF4D(E)-500MS(B)-B6L	214	144	6
YWF4D(E)-500GS(B)-B7L	234	164	7
YWF6D(E)-500GS(B)-B7L	234	164	7
YWF4D-500TS(B)-B7L	234	164	7
YWF6D-500TS(B)-B7L	214	144	7
YWF4D-500FS-B7F	200	130	7

技术参数 Technical data

Model NO.B	Model NO.C	Model NO.D	Model NO.E	Model NO.H	Model NO.G	Model NO.K
YWF4D(E)-500S(B)-B5L	YWF4D(E)-500S(B)-C5L	YWF4D(E)-500S(B)-D5L	YWF4D(E)-500S(B)-E5L	YWF4D(E)-500S(B)-H5L	YWF4D(E)-500B-G5L	YWF4D(E)-500S-K5L
YWF6D(E)-500S(B)-B5L	YWF6D(E)-500S(B)-C5L	YWF6D(E)-500S(B)-D5L	YWF6D(E)-500S(B)-E5L	YWF6D(E)-500S(B)-H5L	YWF6D(E)-500B-G5L	YWF6D(E)-500S-K5L
YWF4D(E)-500MS(B)-B6L	YWF4D(E)-500MS(B)-C6L	YWF4D(E)-500MS(B)-D6L	YWF4D(E)-500MS(B)-E6L	YWF4D(E)-500MS(B)-H6L	YWF4D(E)-500MB-G6L	YWF4D(E)-500MS-K6L
YWF4D(E)-500GS(B)-B7L	YWF4D(E)-500GS(B)-C7L	YWF4D(E)-500GS(B)-D7L	YWF4D(E)-500GS(B)-E7L	YWF4D(E)-500GS(B)-H7L	YWF4D(E)-500GB-G7L	YWF4D(E)-500GS-K7L
YWF6D(E)-500GS(B)-B7L	YWF6D(E)-500GS(B)-C7L	YWF6D(E)-500GS(B)-D7L	YWF6D(E)-500GS(B)-E7L	YWF6D(E)-500GS(B)-H7L	YWF6D(E)-500GB-G7L	YWF6D(E)-500GS-K7L
YWF4(6)D-500TS(B)-B7L	YWF4(6)D-500TS(B)-C7L	YWF4(6)D-500TS(B)-D7L	YWF4(6)D-500TS(B)-E7L	YWF4(6)D-500TS(B)-H7L	YWF4(6)D-500TB-G7L	YWF4(6)D-500TS-K7L
/	/	/	YWF4D(E)-500S-E4F	/	/	/
/	/	/	YWF6D-500S-E4F	/	/	/
YWF4D-500FS-B7F	YWF4D-500FS-C7F	YWF4D-500FS-D7F	YWF4D-500FS-E7F	YWF4D-500FS-H7F	YWF4D-500FB-G7F	YWF4D-500FS-K7F

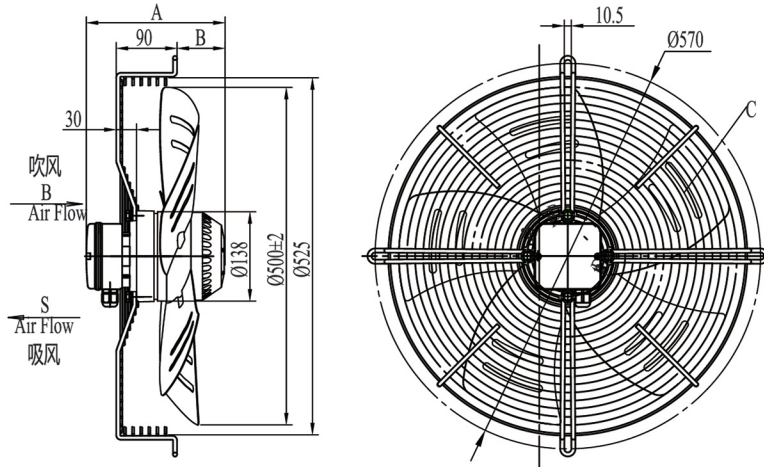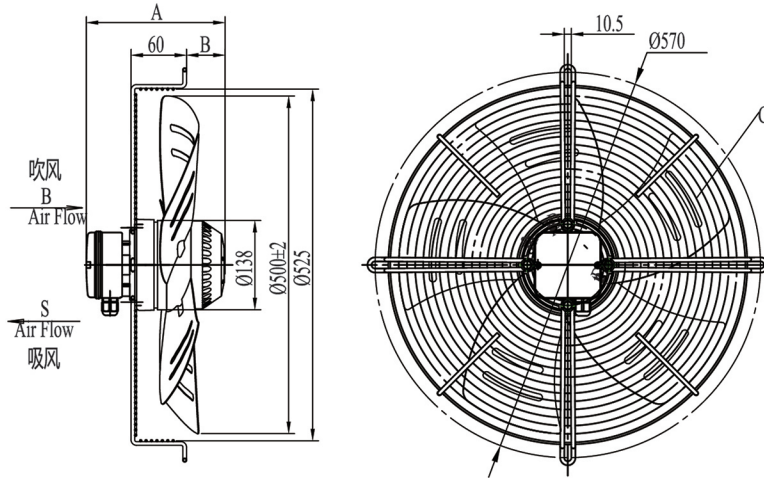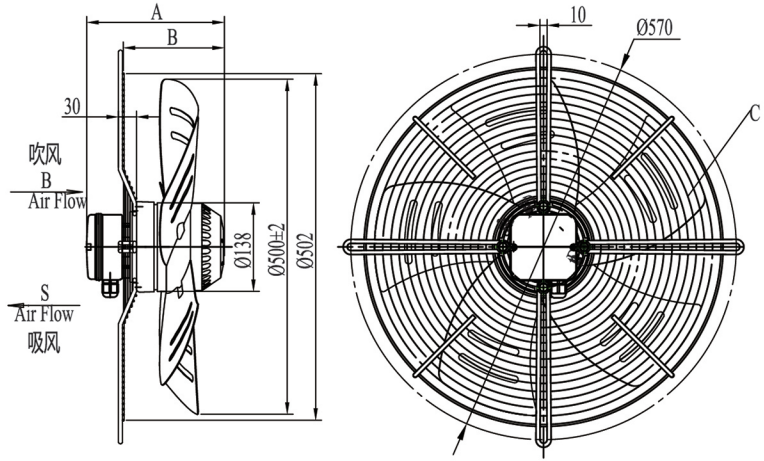

型号 MODEL	尺寸		叶片数量
	A	B	
YWF4D(E)-500S(B)-C5L	200	160	5
YWF6D(E)-500S(B)-C5L	200	160	5
YWF4D(E)-500MS(B)-C6L	214	174	6
YWF4D(E)-500GS(B)-C7L	234	194	7
YWF6D(E)-500GS(B)-C7L	234	194	7
YWF4D-500TS(B)-C7L	234	194	7
YWF6D-500TS(B)-C7L	214	174	7
YWF4D-500FS-C7F	200	160	7

型号 MODEL	尺寸		叶片数量
	A	B	
YWF4D(E)-500S(B)-D5L	200	75	5
YWF6D(E)-500S(B)-D5L	200	75	5
YWF4D(E)-500MS(B)-D6L	214	89	6
YWF4D(E)-500GS(B)-D7L	234	109	7
YWF6D(E)-500GS(B)-D7L	234	109	7
YWF4D-500TS(B)-D7L	234	109	7
YWF6D-500TS(B)-D7L	214	89	7
YWF4D-500FS-D7F	200	75	7

型号 MODEL	尺寸		叶片数量
	A	B	
YWF4D(E)-500S(B)-E5L	200	70	5
YWF6D(E)-500S(B)-E5L	200	70	5
YWF4D(E)-500MS(B)-E6L	214	84	6
YWF4D(E)-500GS(B)-E7L	234	104	7
YWF6D(E)-500GS(B)-E7L	234	104	7
YWF4D-500TS(B)-E7L	234	104	7
YWF6D-500TS(B)-E7L	214	84	7
YWF4D-500FS-E7F	200	70	7
YWF4D(E)-500S-E4F	214	77.5	4
YWF6D-500S-E4F	214	77.5	4

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN



轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN



EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN



AC 离心风机
AC CENTRIFUGAL FAN

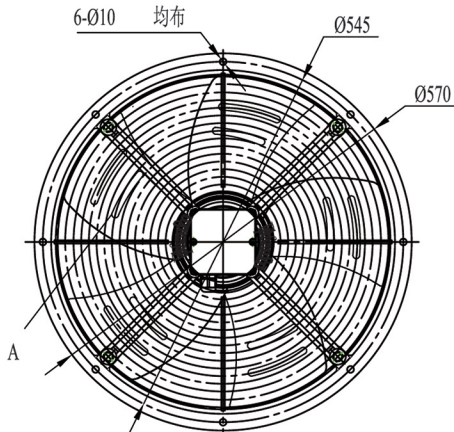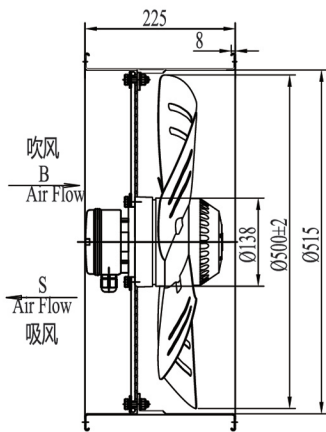

型号 MODEL	叶片数量 A
YWF4D(E)-500S(B)-H5L	5
YWF6D(E)-500S(B)-H5L	5
YWF4D(E)-500MS(B)-H6L	6
YWF4D(E)-500GS(B)-H7L	7
YWF6D(E)-500GS(B)-H7L	7
YWF4D-500TS(B)-H7L	7
YWF6D-500TS(B)-H7L	7
YWF4D-500FS-H7F	7

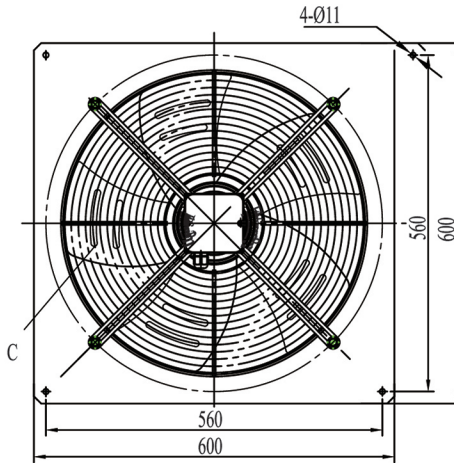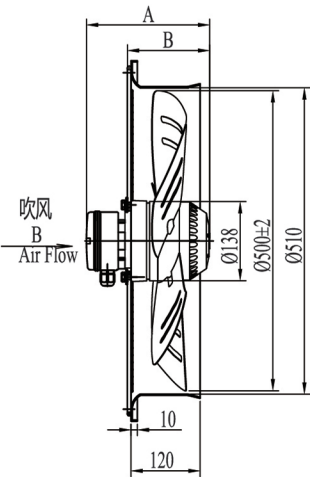

型号 MODEL	尺寸			叶片数量 C
	A	B		
YWF4D(E)-500S(B)-G5L	200	135		5
YWF6D(E)-500S(B)-G5L	200	135		5
YWF4D(E)-500MS(B)-G6L	214	149		6
YWF4D(E)-500GS(B)-G7L	234	169		7
YWF6D(E)-500GS(B)-G7L	234	169		7
YWF4D-500TS(B)-G7L	234	169		7
YWF6D-500TS(B)-G7L	214	149		7
YWF4D-500FS-G7F	200	135		7

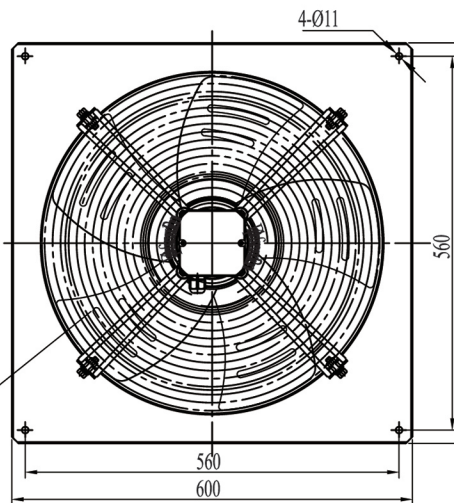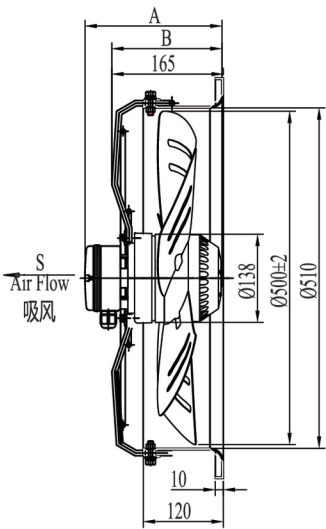

型号 MODEL	尺寸			叶片数量 C
	A	B		
YWF4D(E)-500S(B)-K5L	200	153		5
YWF6D(E)-500S(B)-K5L	200	153		5
YWF4D(E)-500MS(B)-K6L	214	167		6
YWF4D(E)-500GS(B)-K7L	234	187		7
YWF6D(E)-500GS(B)-K7L	234	187		7
YWF4D-500TS(B)-K7L	234	187		7
YWF6D-500TS(B)-K7L	214	167		7
YWF4D-500FS-K7F	200	153		7



- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

技术参数 Technical data

型号 MODEL	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	最大风量 / 许用静压 Air Volume / Max. static pressure		净重 N.W
	#	V	Hz	A	W	RPM	dB	μF	m³/h	/ Pa	Kg
YWF4D-550-E5L	①	380	50	1.3	600	1360	70	/	8730	/ 120	11.0
	②	400	60	1.55	800	1450	72	/	8555	/ 110	11.0
YWF4E-550-E5L	①	220	50	2.8	650	1340	70	15	8546	/ 120	11.0
	②	230	60	4.0	950	1550	72	15	8555	/ 110	11.0
YWF6D-550-E5L	③	380	50	0.72	315	895	60	/	7000	/ 85	10.8
	④	400	60	0.6	300	1000	62	/	6655	/ 92	10.8
YWF6E-550-E5L	⑤	220	50	1.0	220	880	60	6	6355	/ 85	10.8
	④	230	60	1.2	350	1100	62	6	6655	/ 92	10.8
YWF4D-550M-E5L	⑥	380	50	1.26	640	1400	72	/	9260	/ 120	11.0
	⑦	400	60	1.45	850	1600	74	/	9725	/ 110	11.0
YWF4E-550M-E5L	⑥	220	50	2.8	650	1340	72	15	9260	/ 120	11.0
	⑧	380	50	0.58	250	880	62	/	5330	/ 100	10.5
YWF6D-550M-E5L	⑨	400	60	0.7	360	950	64	/	5565	/ 90	10.5
	⑩	380	50	2.45	1100	1360	78	/	10300	/ 150	12.8
YWF4D-550T-E7L	⑪	380	50	0.9	360	890	70	/	6850	/ 90	12.5
	⑫	380	50	1.2	620	1320	72	/	11200	/ 105	12

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN