






- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C


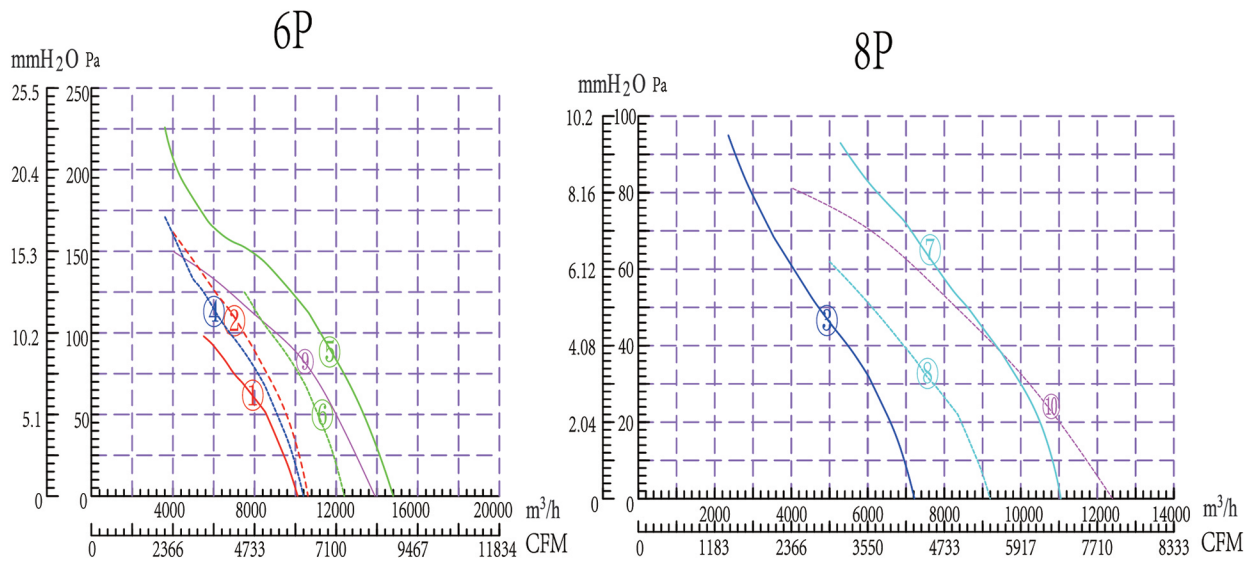


技术参数 Technical data

| 型号<br>MODEL    | 曲线<br>Curve NO. | 电压<br>Voltage | 频率<br>Frequency | 额定电流<br>Current | 输入功率<br>Input Power | 转速<br>Speed | 噪音<br>Noise | 电容<br>Capacitor | 额定风量 / 许用静压<br>Air Volume / Max.static pressure | 净重<br>N.W |
|----------------|-----------------|---------------|-----------------|-----------------|---------------------|-------------|-------------|-----------------|-------------------------------------------------|-----------|
|                | #               | V             | Hz              | A               | W                   | RPM         | dB          | μF              | m <sup>3</sup> /h / Pa                          | Kg        |
| YWF6D-710-E6L  | ①               | 380           | 50              | 1.05            | 440                 | 810         | 68          | /               | 10165 / 95                                      | 19.5      |
|                | ②               | 400           | 60              | 1.6             | 700                 | 1020        | 70          | /               | 10675 / 85                                      | 19.5      |
| YWF8D-710-E6L  | ③               | 380           | 50              | 1.36            | 330                 | 665         | 60          | /               | 7220 / 75                                       | 19.2      |
| YWF6D-710M-E7L | ④               | 380           | 50              | 2.05            | 920                 | 1020        | 68          | /               | 10445 / 95                                      | 20.5      |
| YWF6D-710G-E7L | ⑤               | 400 ▲         | 50              | 1.78            | 925                 | 930         | 77          | /               | 14800 / 110                                     | 32        |
|                | ⑥               | 400Y          | 50              | 1.25            | 651                 | 720         | 73          | /               | 12400 / 65                                      | 32        |
| YWF8D-710G-E7L | ⑦               | 400 ▲         | 50              | 0.88            | 450                 | 700         | 70          | /               | 11200 / 60                                      | 28.5      |
|                | ⑧               | 400Y          | 50              | 0.61            | 320                 | 530         | 62          | /               | 9200 / 40                                       | 28.5      |
| YWF6D-710H-E5L | ⑨               | 400 ▲         | 50              | 2.1             | 890                 | 910         | 73          | /               | 13950 / 100                                     | 24        |
|                | ⑩               | 400Y          | 50              | 1.1             | 670                 | 750         | 68          | /               | 12400 / 60                                      | 24        |

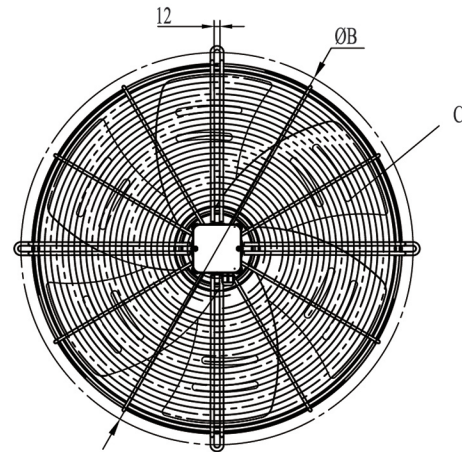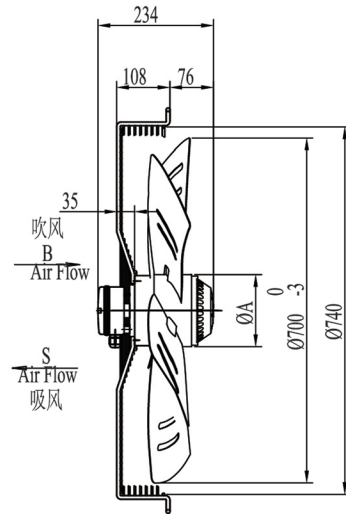

| 型号<br>MODEL        | 尺寸/mm |     | 叶片数量 |
|--------------------|-------|-----|------|
|                    | A     | B   |      |
| YWF6D-710S(B)-E6L  | 138   | 795 | 6    |
| YWF8D-710S(B)-E6L  | 138   | 795 | 6    |
| YWF6D-710MS(B)-E7L | 138   | 795 | 7    |
| YWF6D-710MS(B)-E5L | 170   | 845 | 5    |

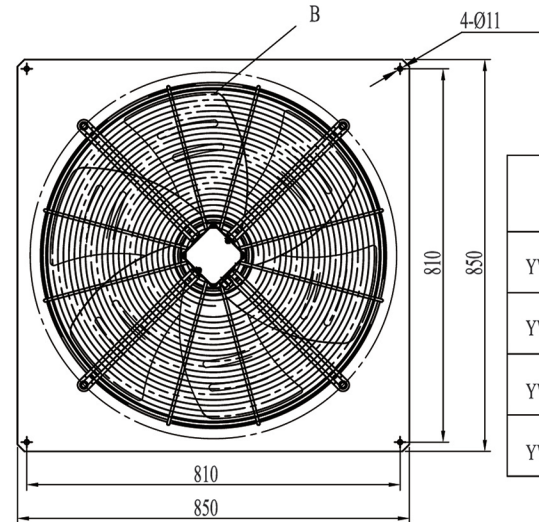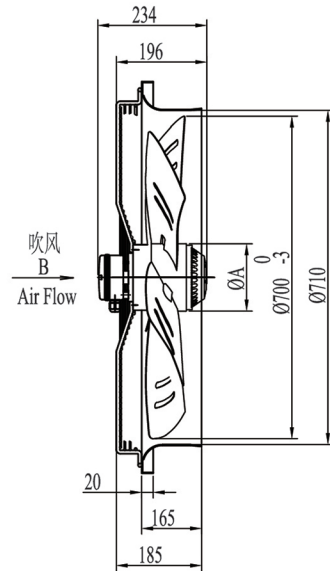

| 型号<br>MODEL     | 尺寸/mm |   | 叶片数量 |
|-----------------|-------|---|------|
|                 | A     | C |      |
| YWF6D-710GB-G7L | 180   | 7 |      |
| YWF8D-710GB-G7L | 180   | 7 |      |
| YWF6D-710MB-G7L | 138   | 7 |      |
| YWF6D-710HB-G5L | 170   | 5 |      |

技术参数 Technical data

|            |            |            |                    |            |                 |                 |
|------------|------------|------------|--------------------|------------|-----------------|-----------------|
|            |            |            |                    |            |                 |                 |
| Model NO.B | Model NO.C | Model NO.D | Model NO.E         | Model NO.H | Model NO.G      | Model NO.K      |
| /          | /          | /          | YWF6D-710S(B)-E6L  | /          | YWF6D-710B-G6L  | /               |
| /          | /          | /          | YWF8D-710S(B)-E6L  | /          | YWF8D-710B-G6L  | /               |
| /          | /          | /          | YWF6D-710MS(B)-E7L | /          | YWF6D-710MB-G7L | /               |
| /          | /          | /          | YWF6D-710GS(B)-E7L | /          | /               | YWF6D-710GS-K7L |
| /          | /          | /          | YWF8D-710GS(B)-E7L | /          | /               | YWF8D-710GS-K7L |







轴流风机  
AL FAN

EC 离心风机  
EC CENTRIFUGAL FAN


EC 离心风机  
EC SHADED-POLE MOTOR

AC 外转子轴流风机  
AC AXIAL FAN


AC 离心风机  
AC CENTRIFUGAL FAN

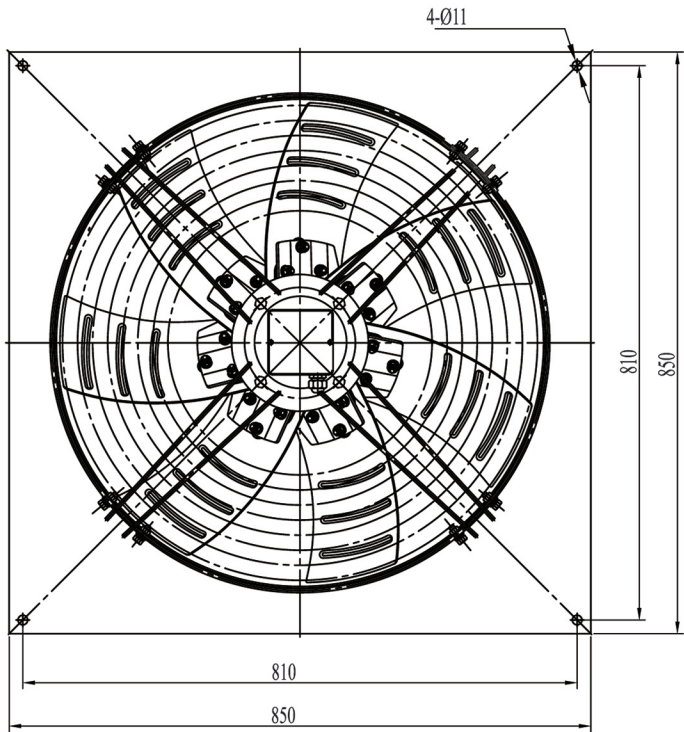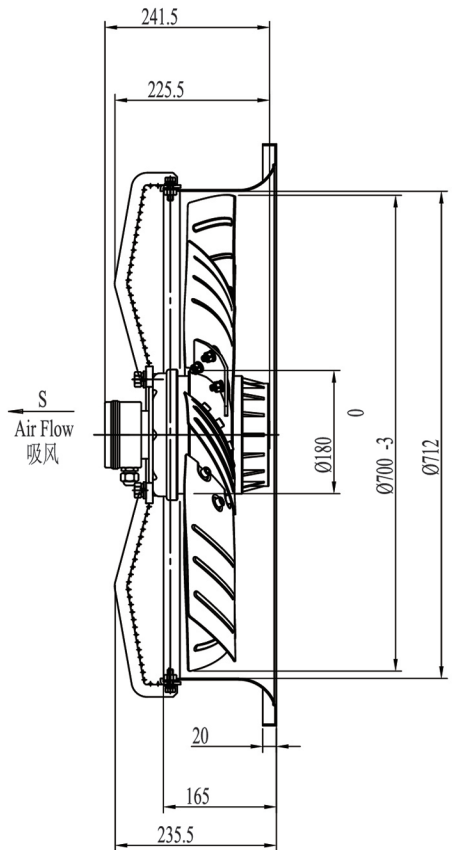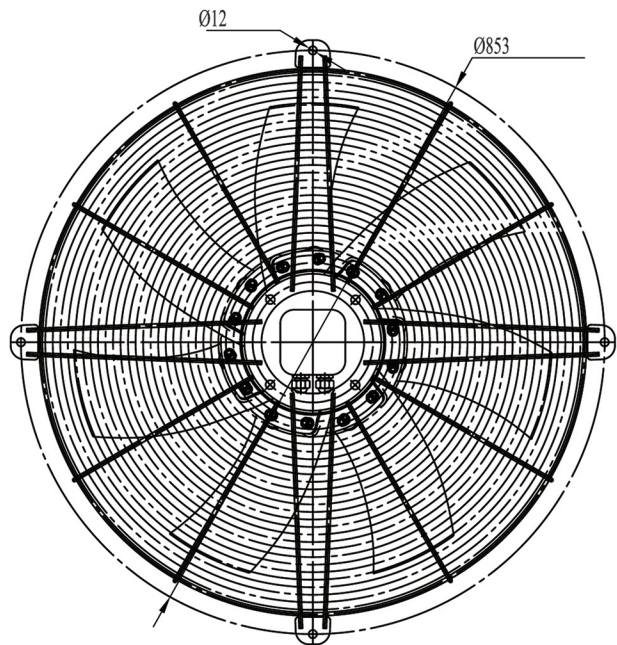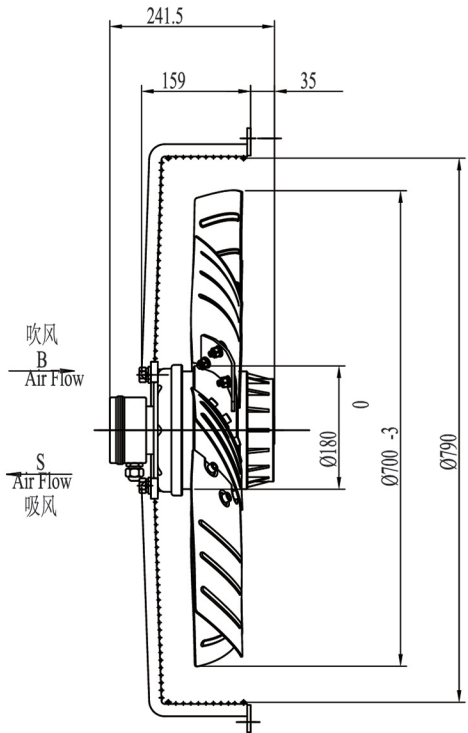

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

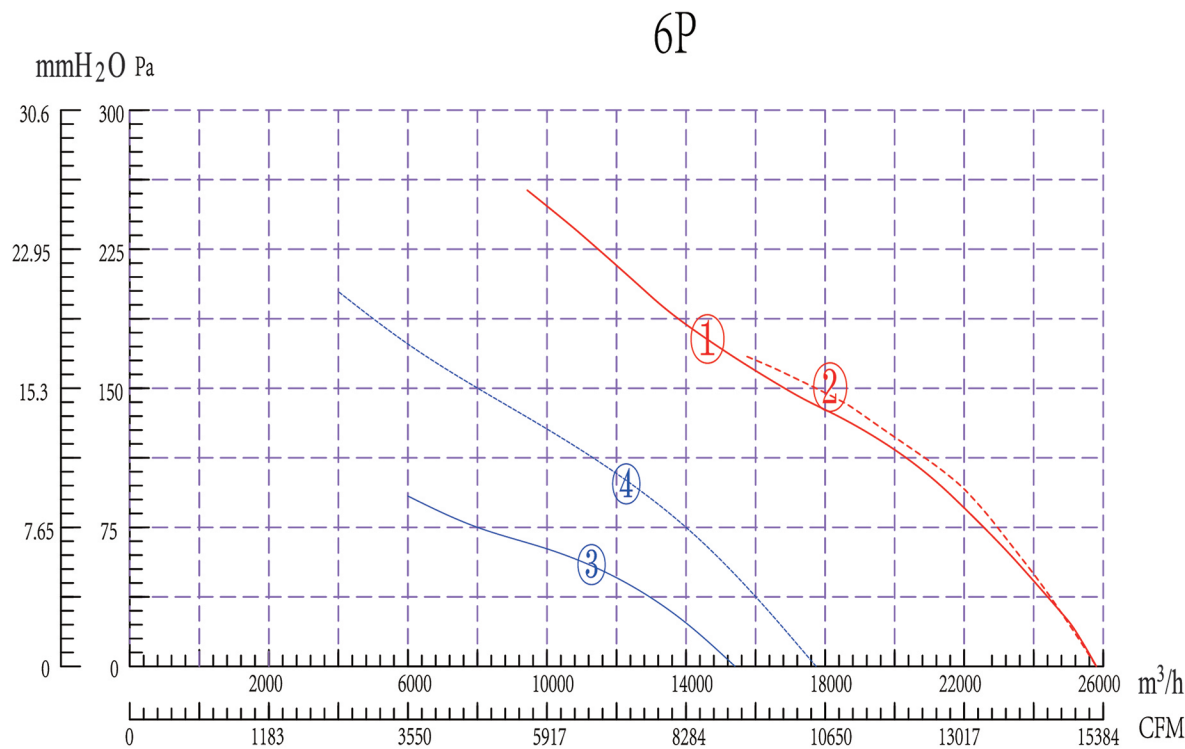

技术参数 Technical data

|  |  | 曲线<br>Curve NO. | 电压<br>Voltage | 频率<br>Frequency | 额定电流<br>Current | 输入功率<br>Input Power | 转速<br>Speed | 噪音<br>Noise | 电容<br>Capacitor | 额定风量 / 许用静压<br>Air Volume / Max static pressure | 净重<br>N.W |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------|---------------|-----------------|-----------------|---------------------|-------------|-------------|-----------------|-------------------------------------------------|-----------|
| 型号<br>MODEL                                                                           |                                                                                       | #               | V             | Hz              | A               | W                   | RPM         | dB          | μF              | m³/h / Pa                                       | Kg        |
| YWF6D-800G-E7L                                                                        | YWF6D-800G-K7L                                                                        | ①               | 380           | 50              | 4.1             | 2120                | 900         | 80          | /               | 25800 / 120                                     | 35.0      |
|                                                                                       |                                                                                       | ②               | 380           | 60              | 3.5             | 1938                | 1070        | 80          | /               | 25800 / 135                                     | 35.0      |
| YWF6D-800H-E5L                                                                        | YWF6D-800H-K5L                                                                        | ③               | 380▲          | 50              | 2.5             | 1150                | 900         | 76          | /               | 17800 / 125                                     | 27.0      |
|                                                                                       |                                                                                       | ④               | 380Y          | 50              | 1.5             | 870                 | 710         | 71          | /               | 15400 / 65                                      | 27.0      |

轴流风机  
AL FAN

EC 离心风机  
EC CENTRIFUGAL FAN

EC 离心风机  
EC SHADED-POLE MOTOR

AC 外转子轴流风机  
AC AXIAL FAN

AC 离心风机  
AC CENTRIFUGAL FAN