



轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

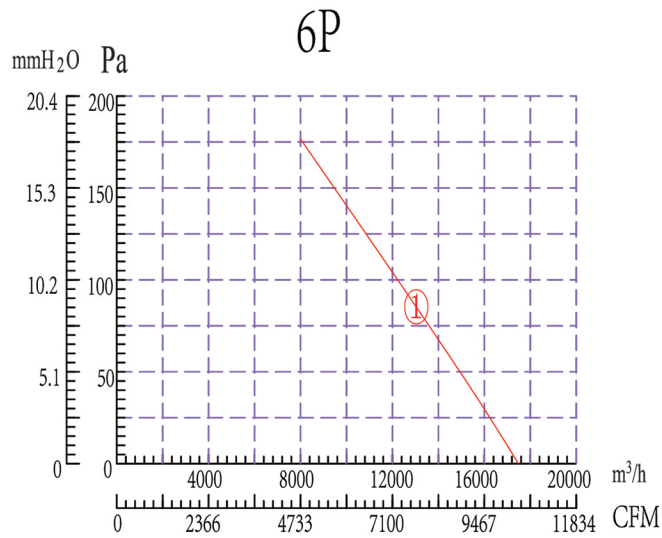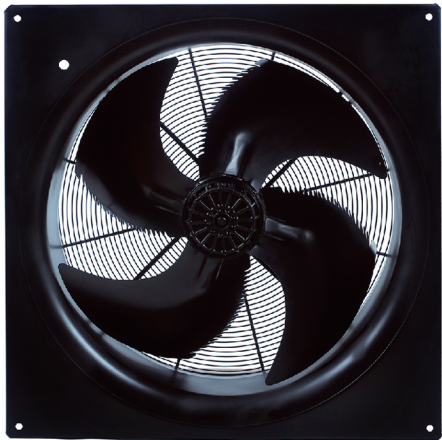



- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

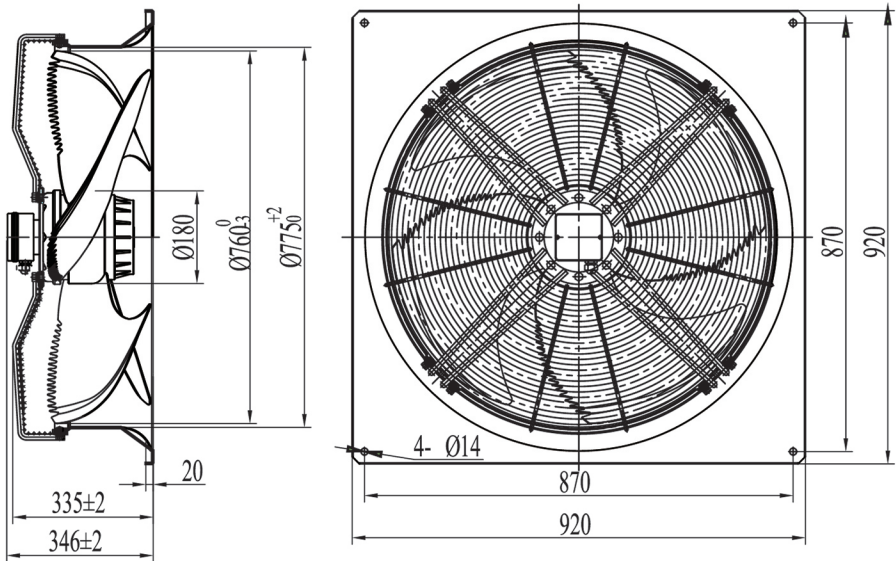


技术参数 Technical data

型号 MODEL	特征码 Feature Code	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitance	最大风量 / 许用静压 Air Volume / Max. static pressure	净重 N.W
		#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa	Kg
YWF6D-760R	S-K4L.4AAD.021	①	380	50	2.8	1270	930	70	/	17450 / 100	45

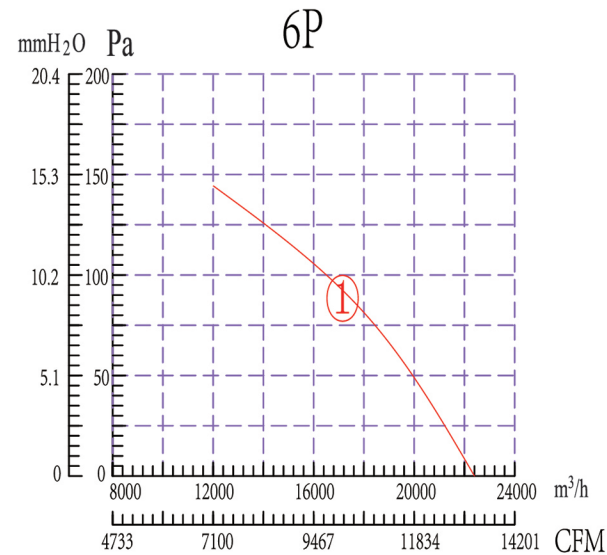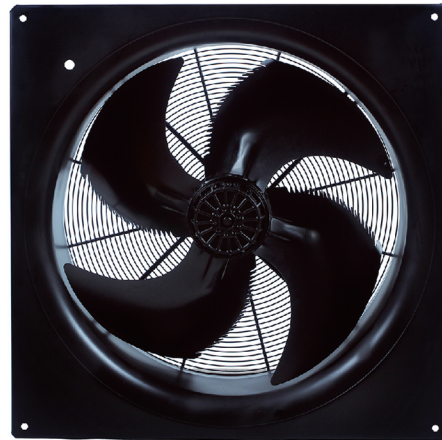

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

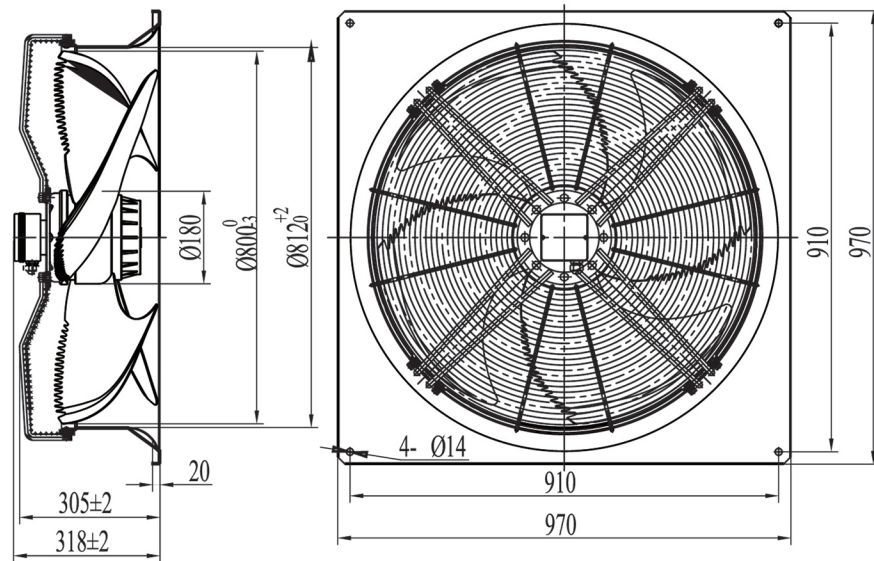

技术参数 Technical data

型号 MODEL	特征码 Feature Code	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitance	最大风量 / 许用静压 Air Volume / Max. static pressure	净重 N.W
		#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa	Kg
YWF6D-800R	S-K4L.4AAD.021	①	380	50	4.2	2100	900	70	/	17450 / 105	48

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN