





轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN


EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN


AC 离心风机
AC CENTRIFUGAL FAN

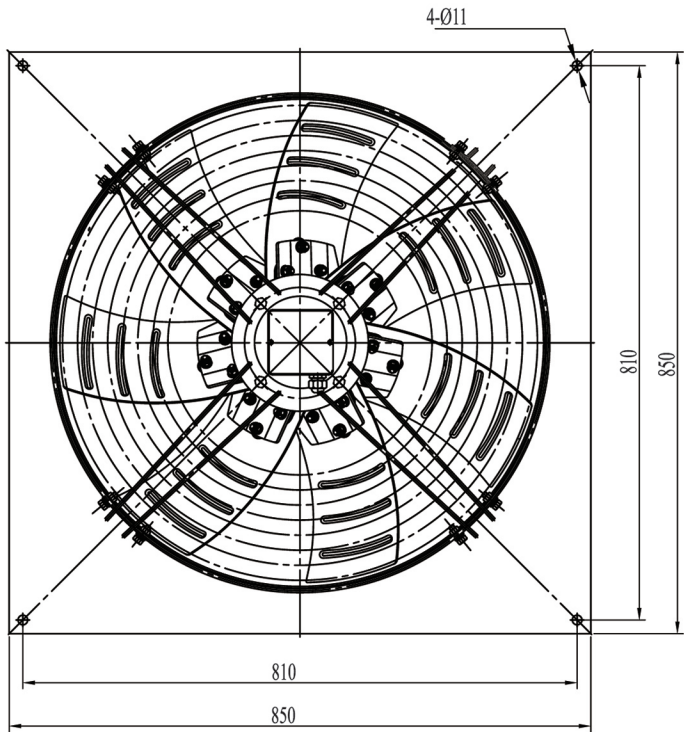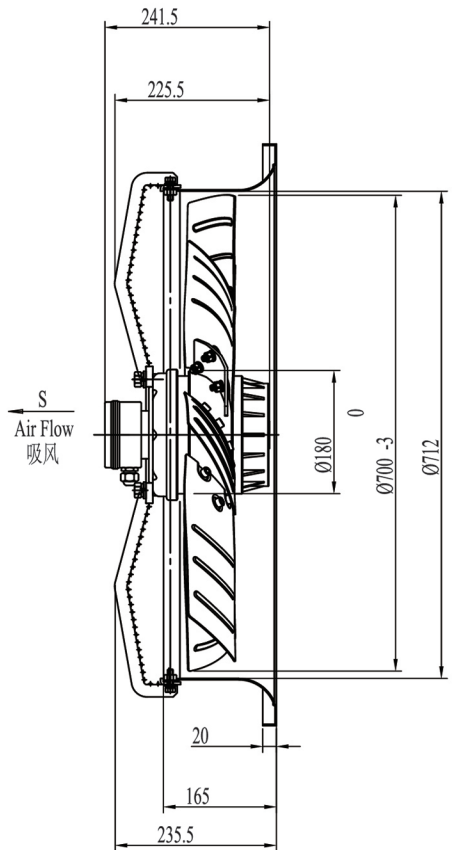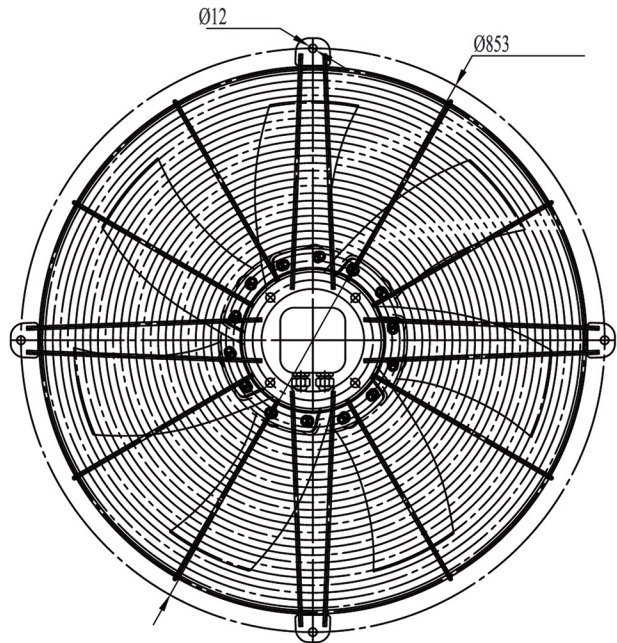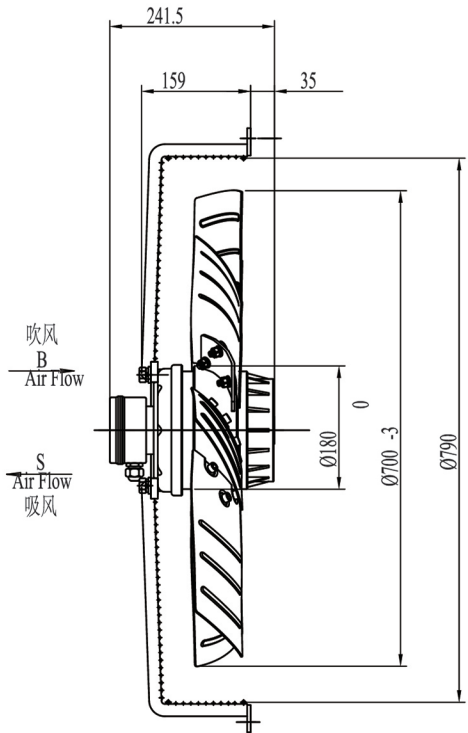

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
- Insulation Class: “B” “F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

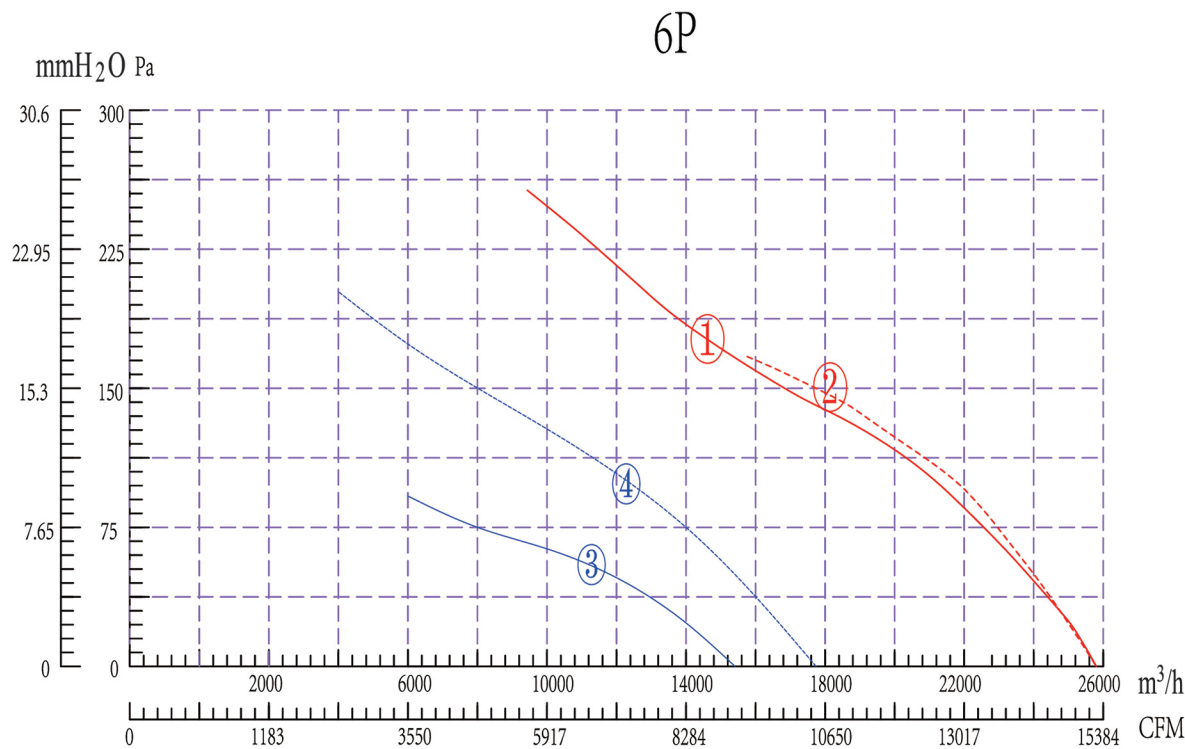

技术参数 Technical data

		曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 / 许用静压 Air Volume / Max static pressure	净重 N.W
型号 MODEL		#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF6D-800G-E7L	YWF6D-800G-K7L	①	380	50	4.1	2120	900	80	/	25800 / 120	35.0
		②	380	60	3.5	1938	1070	80	/	25800 / 135	35.0
YWF6D-800H-E5L	YWF6D-800H-K5L	③	380▲	50	2.5	1150	900	76	/	17800 / 125	27.0
		④	380Y	50	1.5	870	710	71	/	15400 / 65	27.0


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN


EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

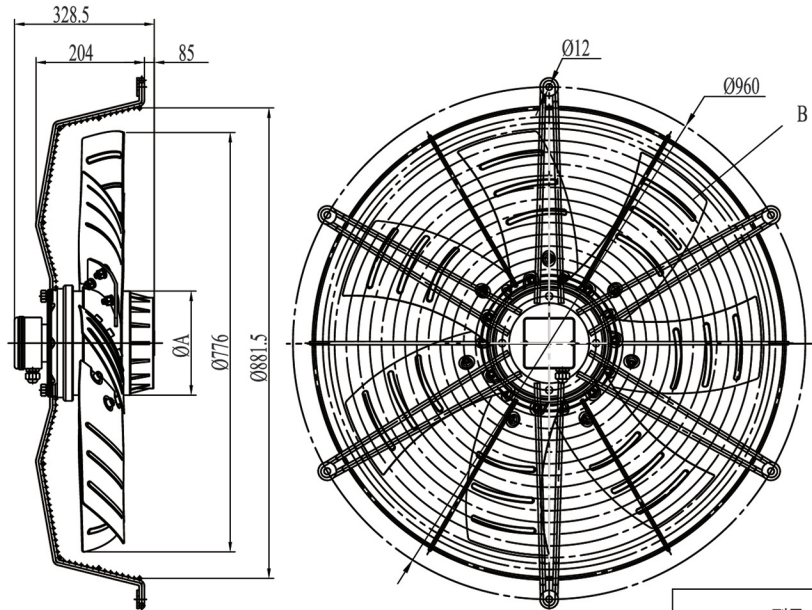


型号 MODEL	尺寸/mm		叶片数量
	A	B	
YWF6D-800GS(B)-E7L	180	7	
YWF6D-800MS(B)-E5L	170	5	

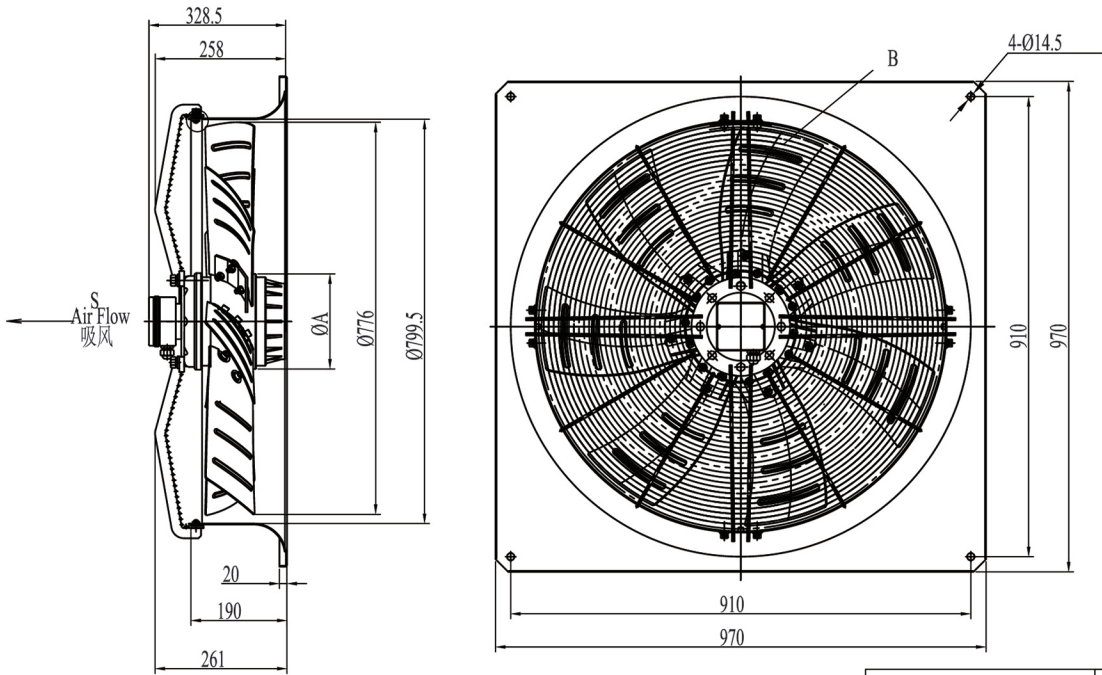


型号 MODEL	尺寸/mm		叶片数量
	A	B	
YWF6D-800GS-K7L	180	7	
YWF6D-800HS-K5L	170	5	



- 防护等级：IP54
 - 绝缘等级：“B” “F”
 - 工作方式：S1
 - 轴承：免维护轴承
 - 叶片材质：钢板
 - 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
 - Insulation Class: “B” “F”
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Blades: steel plate
 - Perm.amb.temp.: -40°C - +60°C

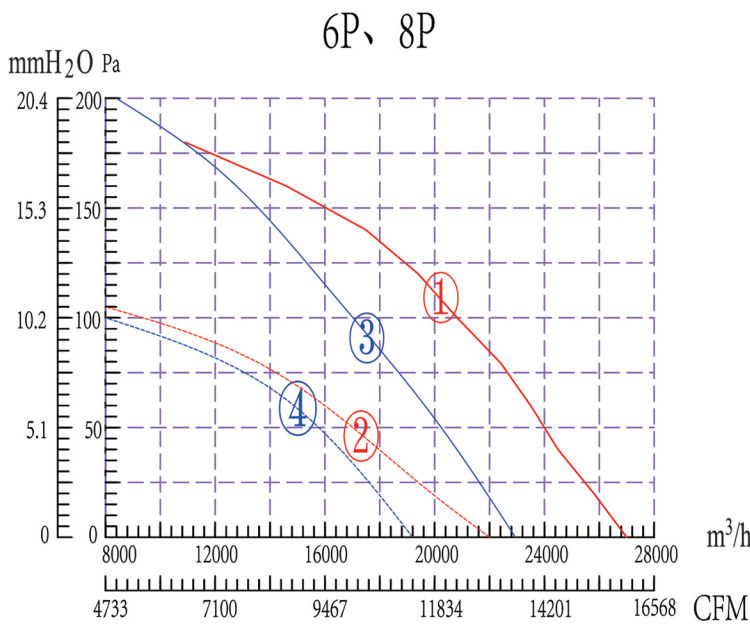

技术参数 Technical data

		曲线	电压	频率	额定电流	输入功率	转速	噪音	电容	额定风量 / 许用静压	净重
		Curve NO.	Voltage	Frequency	Current	Input Power	Speed	Noise	Capacitor	Air Volume / Max static pressure	N.W
型号 MODEL		#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa	Kg
YWF6D-910G-E7L	YWF6D-910G-K7L	①	380▲	50	3.1	1350	900	85	/	27000 / 140	42.0
YWF8D-910G-E7L	YWF8D-910G-K7L	②	380	50	1.55	870	720	80	/	22000 / 100	41.0
YWF6D-910H-E5L	YWF6D-910H-K5L	③	400▲	50	3.65	1730	900	77	/	22950 / 135	31
		④	400Y	50	2.2	1250	750	73	/	19200 / 70	31