

Movement by Perfection



The Royal League in **ventilation**, control and drive technology



Product documentation

Type
RE35P-4DK.7M.1R

Article number
210202

1. Recitals

The Product Specifications contained in this document are final, unless otherwise stated by a separate provision in the "ZIEHL-ABEGG deviation list document" with respect to information provided by the customer (cp. separate Chapter: Attachment).

Other regulations between the parties, regardless of time, form or content, are not part of the subject matter of the contract and the agreement on characteristics/of features (Product Specifications) between the parties.

Compliance with the following specifications is mandatory to ensure the functionality and safety of the product. If the following specifications given especially but not limited for operating conditions, transport, storage, mounting, start-up, maintenance and repair are not observed, the product may not operate safely and may cause a hazard to the life and limb of users and third parties.

Deviations from the following requirements may therefore lead both to the loss of the statutory material defect liability rights and to the liability of the buyer for the product that has become unsafe due to the deviation from the specifications.

2. Product specification - Technical data

Article number	210202
Type	RE35P-4DK.7M.1R
Designation	Single inlet impeller with forward curved blades.
Rated values	3~230/400V $\pm 10\%$ Δ/Y 50Hz P_1 3.70kW 10.50/ 6.00A 1320/min COSY 0,89 PsF min.330PA 40°C 3~230/400V $\pm 10\%$ Δ/Y 60Hz P_1 4.20kW 12.10/ 7.00A 1500/min COSY 0,87 PsF min.720PA 40°C 3~265/460V $\pm 10\%$ Δ/Y 60Hz P_1 4.90kW 12.00/ 7.00A 1560/min COSY 0,88 PsF min.710PA 40°C
Electrical connection	Supply cable side, 9x 0,75mm ² x 105cm
ErP Data	Measurement category ErP: A Air flow q_v on Eta opt: 2963 m ³ /h Pressure increase p_{fs} on Eta opt: 753 Pa Input power P_1 on Eta opt: 1542 W Efficiency η_{statA} : 41.2 % Efficiency grade: $N_{actual} = 46.3 / N_{target} = 44^*$ *ErP 2015
Thermal class	Thermal class 155
Cable quality	Li4G4G-J
Material impeller	Impeller made of galvanised sheet metal
Painting impeller	unpainted
Connection diagram	1360-106XA
Installation position	Fitting position H/Vu/Vo
Fitting position mot	Mounting position H/Vu/Vo
Motor protection	thermal contact
Type of protection	IP54
Impregnation	Moisture and hot climate protection
Quality of bearings	ball bearing with long-time lubrication
Painting motor	Motor 1 coat paint resistance class 1 (L-TI-0596)
Colour motor	2T58036999 RAL 7032 (pebble grey)
Operating manual	L-BAL-005 www.ziehl-abegg.com/bal
Weight	32.00 kg
Wuchtgüte (generiert)	G 6.3
Min. operating temperature °C	-20°C


3. Characteristic Curve

RE35P-4DK.7M.1R

3~ 230V 50Hz D



measurement density kg/m³

Air performance

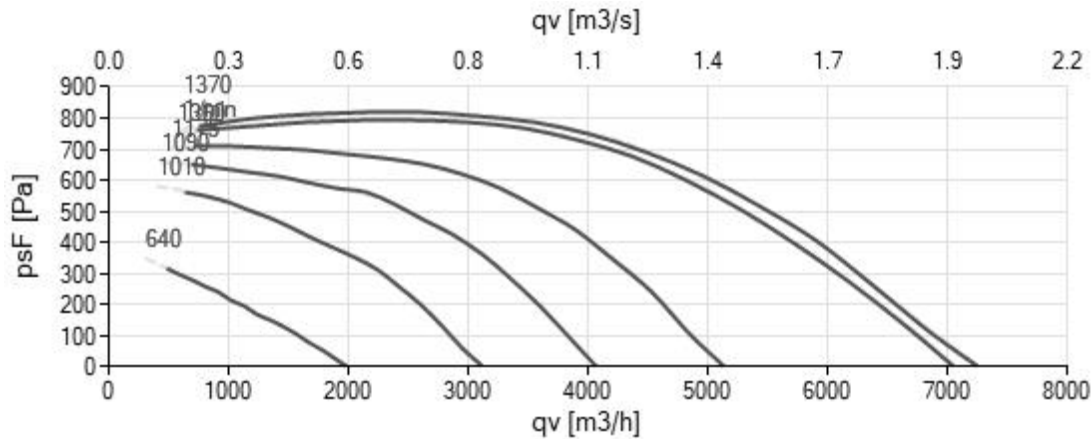

Power input

Efficiency

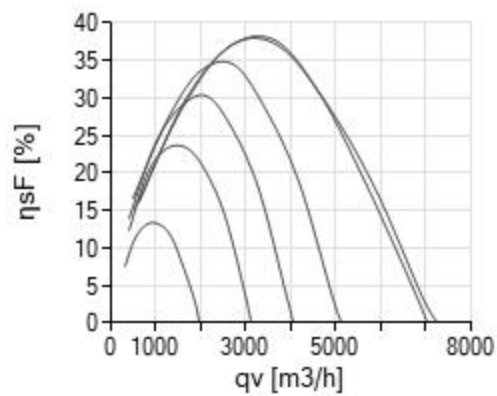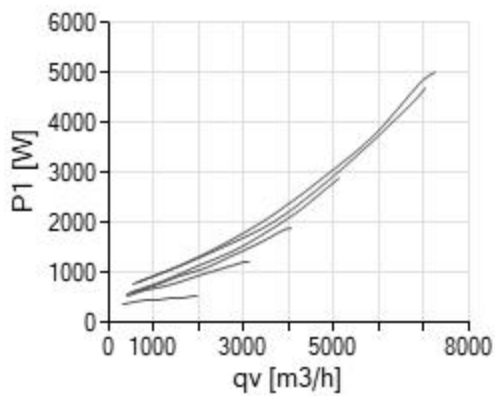


17225

Please note: It's not allowed to use this fan in the stall area!*

*In doubt please ask your responsible ZIEHL-ABEGG sales contact.

4. Drawing

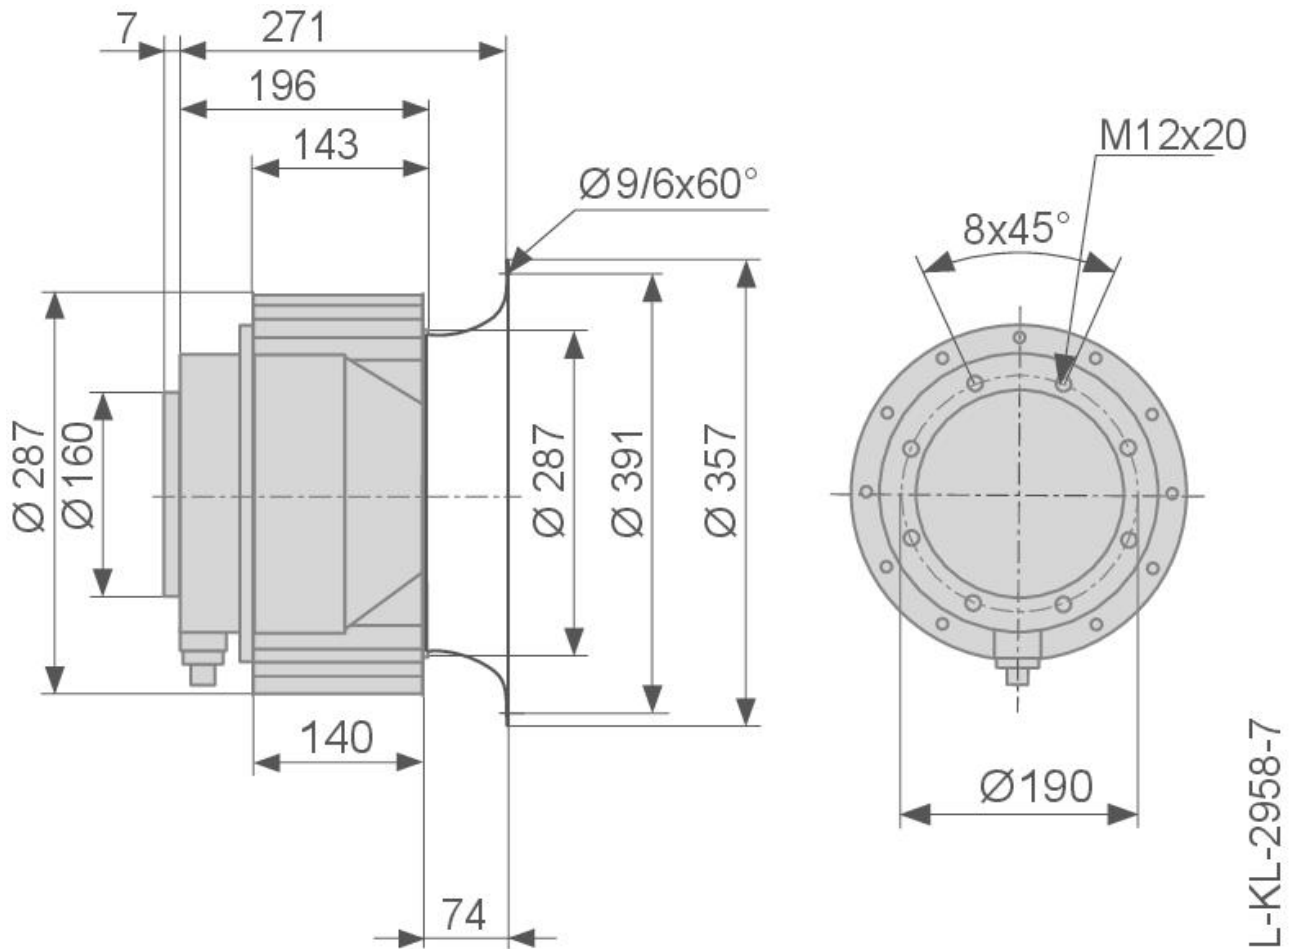

Dimensions in mm


The illustrations shown make no claim to completeness and are for orientation purposes only.

5. Connection diagram


3~ Motor mit einer Drehzahl und
Thermostatschalter (falls eingebaut).
3~ motor with one speed and thermostatic
switch (if built in).

106XA-05

Δ-Schaltung Δ-connection

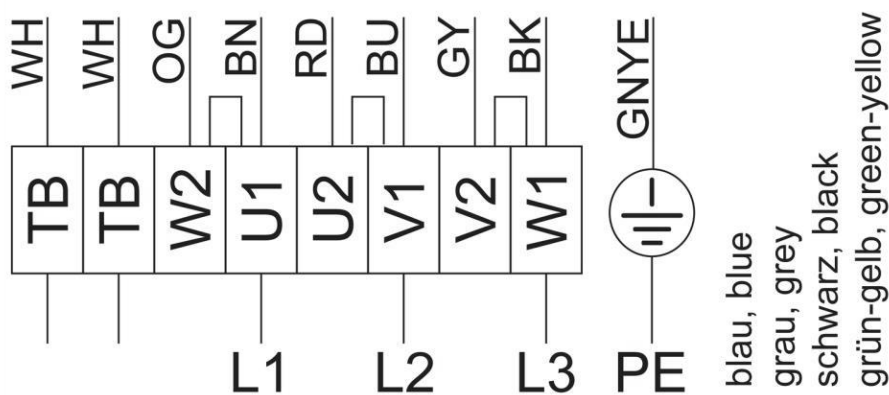

Y-Schaltung Y-connection

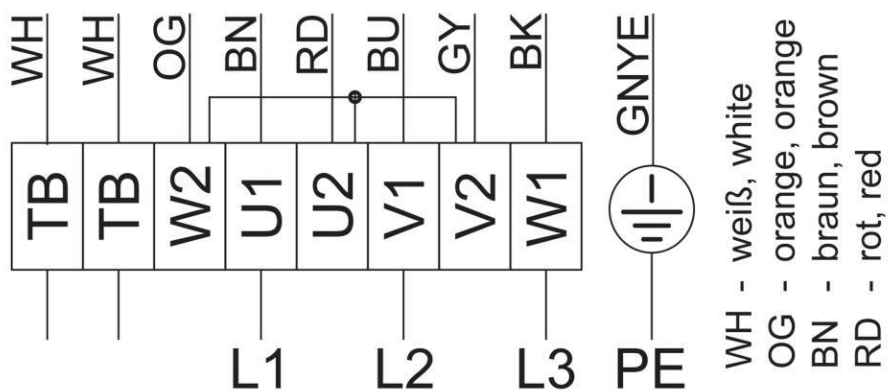

6. EU-Declaration of conformity

EU declaration of conformity

- Translation -
(english)

ZA75-GB 2022/47 Index 019

Manufacturer: ZIEHL-ABEGG SE
Heinz-Ziehl-Straße
74653 Künzelsau
Germany

The manufacturer is solely responsible for issuance of the declaration of conformity.

The products:

- External rotor motor MK..., MW..
- Axial fan DN..., FA..., FB..., FC..., FE..., FF..., FG..., FH..., FL..., FN..., FP..., FS..., FT..., FV..., VN..., VR..., ZC..., ZF..., ZG..., ZN..
- Centrifugal fan ER..., GR..., HR..., RA..., RD..., RE..., RF..., RG..., RH..., RK..., RM..., RR..., RZ..., WR..
- Cross-flow fan QG..., QK..., QR..., QT..

Motor type:

- Asynchronous internal or external rotor motor
- Asynchronous internal or external rotor motor with integrated frequency inverter
- Electronically commutated internal or external rotor motor
- Electronically commutated internal or external rotor motor (also with integrated EC controller)

The above mentioned products of this declaration fulfil all relevant provisions of the following Directives of the Union:

- EMC Directive 2014/30/EU
- Low Voltage Directive 2014/35/EU
- ErP Directive 2009/125/EC, in conjunction with Regulation (EU) no. 327/2011

The following harmonized standards have been applied:

- EN 60034-1:2010 + AC:2010
- EN 60204-1:2018
- EN 60529:1991 + A1:2000 + A2:2013 + AC:1993 + AC:2016 + AC:2019
- EN IEC 61000-6-2:2019
- EN IEC 61000-6-3:2021

Compliance with the ErP Directive 2009/125/EC does not refer to external rotor motors MK..., MW..

All ErP-relevant information comprises measurements which are determined using a standardised measurement set-up. More details can be obtained from the manufacturer.

Compliance with the EMC Directive 2014/30/EU refers only to those products when they are connected by mounting / operating instructions. If these products are integrated into a system or supplemented with other components (e.g. sensing controls) and operated, the manufacturer or operator is responsible of the overall system for compliance with the EMC Directive 2014/30/EU.

Künzelsau, 24.11.2022
(Location, date of issue)

ZIEHL-ABEGG SE
Moritz Krämer
Director Product Development
Ventilation Technology
(name, function)


(signature)

ZIEHL-ABEGG SE
Ralf Oesselke
Director Projects & Series Development
Ventilation Technology
(name, function)


(signature)

ZIEHL-ABEGG 

EC Declaration of Incorporation

- Translation -
(english)

ZA87-GB 2022/17 Index 012

as defined by the EC Machinery Directive 2006/42/EC, Annex II B

The design of the partly completed machine:

- Axial fan DN., FA., FB., FC., FE., FF., FG., FH., FL., FN., FP., FS., FT., FV., VN., VR., ZC., ZF., ZG., ZN..
- Centrifugal fan ER., GR., HR., RA., RD., RE., RF., RG., RH., RK., RM., RR., RZ., WR..
- Cross-flow fan QD., QG., QK., QR., QT.,

Motor type:

- Induction internal or external rotor motor (also with integrated frequency inverter)
- Electronically commutated internal or external rotor motor (also with integrated EC controller)

Complies with the requirements in Appendix I, Articles 1.1.2, 1.1.5, 1.4.1, 1.5.1 in EC Machinery Directive 2006/42/EC.

Manufacturer: ZIEHL-ABEGG SE
Heinz Ziehl Straße
74653 Künzelsau, Germany

The following harmonized standards have been applied:

EN 60204-1:2018	Safety of machinery – Electrical equipment of machines – Part 1: General requirements
EN ISO 12100:2010	Safety of machinery – General principles for design – Risk assessment and risk reduction
EN ISO 13857:2019	Safety of machinery – Safety distances to prevent hazard zones being reached by upper and lower limbs
Note:	Compliance with EN ISO 13857:2019 relates only to the installed contact protection if it is part of the scope of delivery.

The special technical documents in accordance with Appendix VII B have been created and are available in full.

The following persons are authorized to compile the technical documents, address see above.

Upon reasonable request, the special documents shall be transmitted to the public authority. The transfer can be made electronically, on data carriers or on paper. All property rights remain with the aforementioned manufacturer.

Start-up of this incomplete machine is prohibited until it is ensured that the machine in which it has been installed complies with the provisions of the EC Machinery Directive.

Künzelsau, 27.04.2022
(location, date of issue)

ZIEHL-ABEGG SE
Tobias Gauss
Deputy Head of Technics Ventilation Technology
(name, function)



(signature)

ZIEHL-ABEGG SE
Moritz Krämer
Head of Electrical Systems
(name, function)



(signature)

ZIEHL-ABEGG 



The Royal League in ventilation, control and drive technology

Intelligent control technology for any application

**ZIEHL-ABEGG system capabilities:
Everything from a single source – perfectly matched for optimal performance**

Please contact us. We would be pleased to design an individual solution for your requirements.

We would like to welcome you on our worldwide exhibitions. Please find our next exhibitions [here](#).