




Plastic Airfoil Blade Axial Fan

ErP2015
EXCEEDS THE NORM

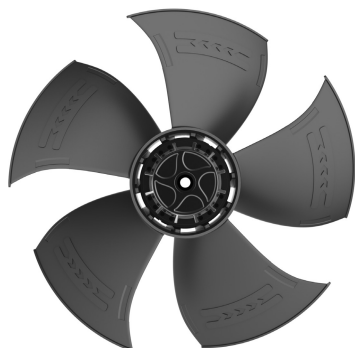

Φ400

Rotor Material: Aluminum Die-casting


Impeller Material: Plastic

Ingress Protection: IP54

Insulation Class: F


Bearing Type: Maintenance Free Ball Bearing

Performance Curves

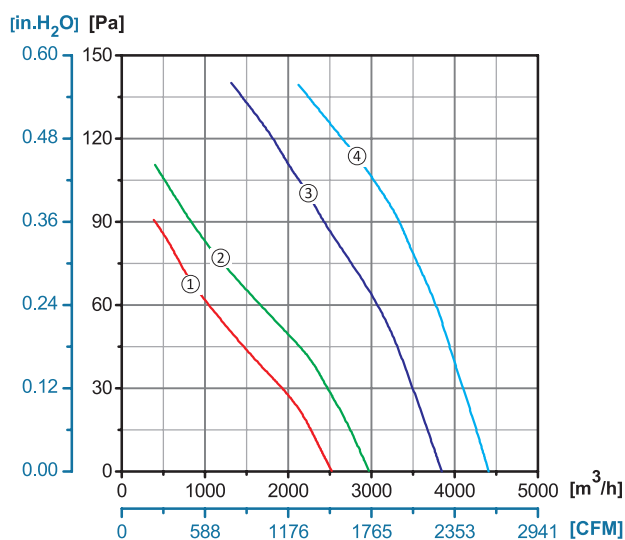


				
Type B	Type C	Type D	Type E	Type F0
YWF.A4S-400S-5B AP0	YWF.A4S-400S-5C AP0	YWF.A4S-400S-5D AP0	YWF.A4S-400S-5E AP0	YWF.A4S-400S-5F AP0
YWF.A4T-400S-5B AP0	YWF.A4T-400S-5C AP0	YWF.A4T-400S-5D AP0	YWF.A4T-400S-5E AP0	YWF.A4T-400S-5F AP0
YWF.A6S-400S-5B AP0	YWF.A6S-400S-5C AP0	YWF.A6S-400S-5D AP0	YWF.A6S-400S-5E AP0	YWF.A6S-400S-5F AP0
YWF.A6T-400S-5B AP0	YWF.A6T-400S-5C AP0	YWF.A6T-400S-5D AP0	YWF.A6T-400S-5E AP0	YWF.A6T-400S-5F AP0


Type B

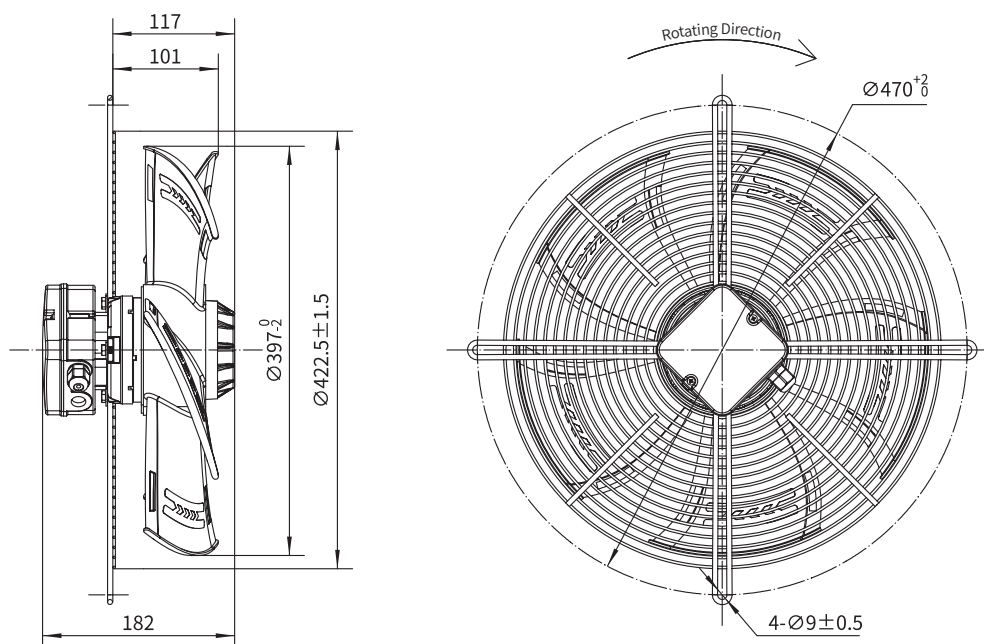

Type C

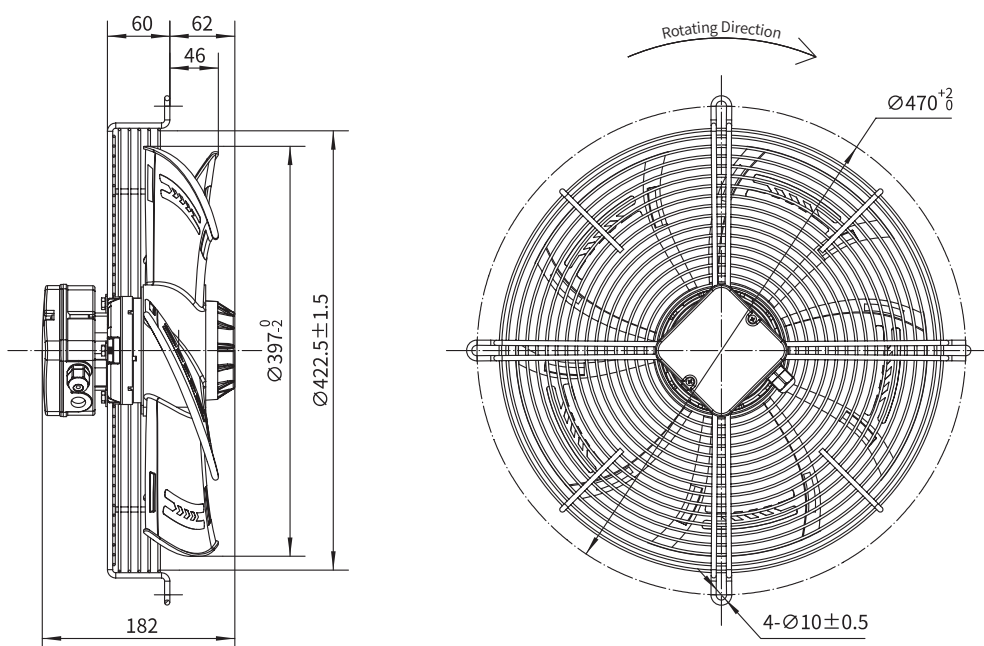

	Voltage	Frequency	Current	Power	Speed	Capacitor	Air Flow (0 Pa)	Noise	Curve	Working Temp.	Approvals
Type F1	V	Hz	A	W	RPM	μF	$[m^3/h]/[CFM]$	dB(A)	No.	Min/Max(°C)	
/	220/230	50	0.76	170	1400	6	3780/2225	58	③	-30/+60	CCC, CE
/	220/230	60	1.07	240	1600	6	4380/2575	61	④	-30/+60	CCC, CE
/	380/400	50	0.50	160	1400	/	3850/2265	60	③	-30/+60	CCC, CE
/	380/400	60	0.50	220	1600	/	4400/2590	63	④	-30/+60	CCC, CE
/	220/230	50	0.44	95	930	4	2520/1480	52	①	-30/+60	CCC, CE
/	220/230	60	0.49	110	1100	4	2970/1745	56	②	-30/+60	CCC, CE
/	380/400	50	0.30	90	940	/	2520/1480	54	①	-30/+60	CCC, CE
/	380/400	60	0.25	95	1100	/	2950/1735	57	②	-30/+60	CCC, CE

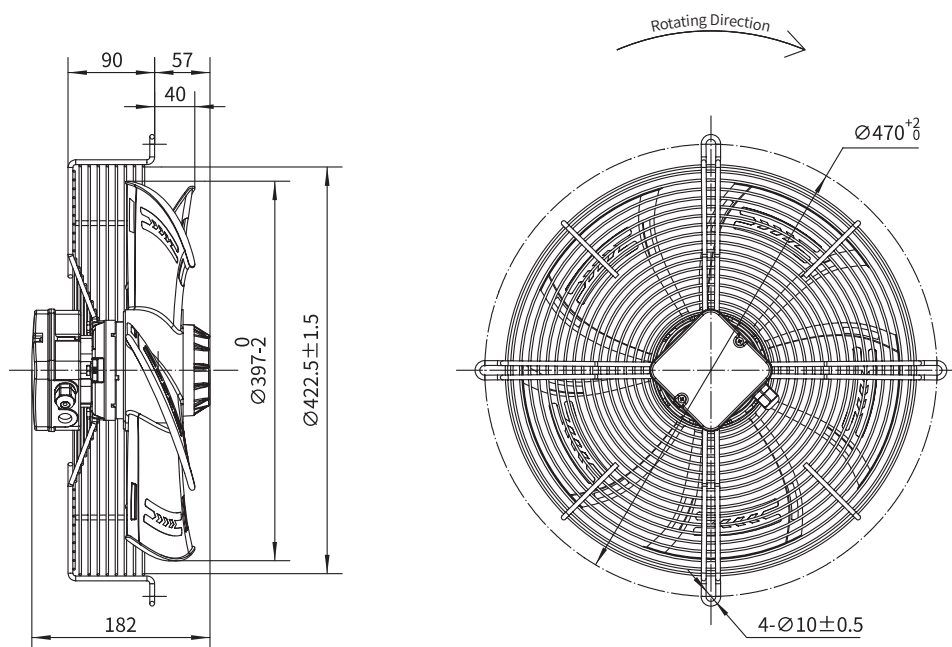**Type D**



Plastic Airfoil Blade Axial Fan

Φ400

Type F0

