

DC Backward Curved Centrifugal Fan

ErP2015
EXCEEDS THE NORM



DC92-B220


防护等级 (Level of protection): IP42

绝缘等级 (Insulation class): B


产品认证 (Approval): CE、CCC

轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC92-B190	24	/	3050	108	4.5	77	-20~+60
DC92-B190	48	/	3050	108	2.2	77	-20~+60

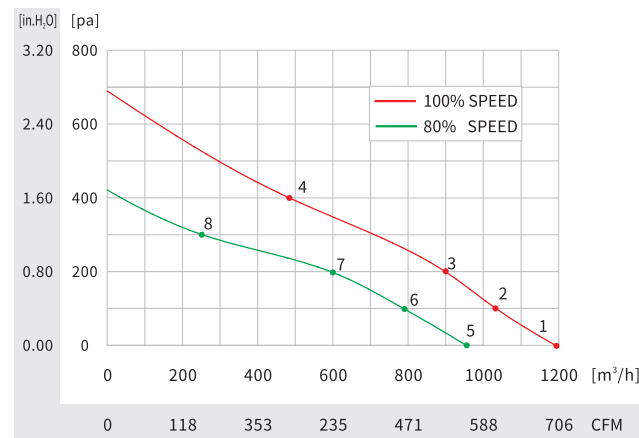

No.	转 速 Speed	输入功率 Input Power
	[RPM]	[W]
1	3038	111.3
2	2913	114.9
3	2856	115.6
4	2808	115.5
5	2427	58.4
6	2313	63.3
7	2274	65.1
8	2310	58.8

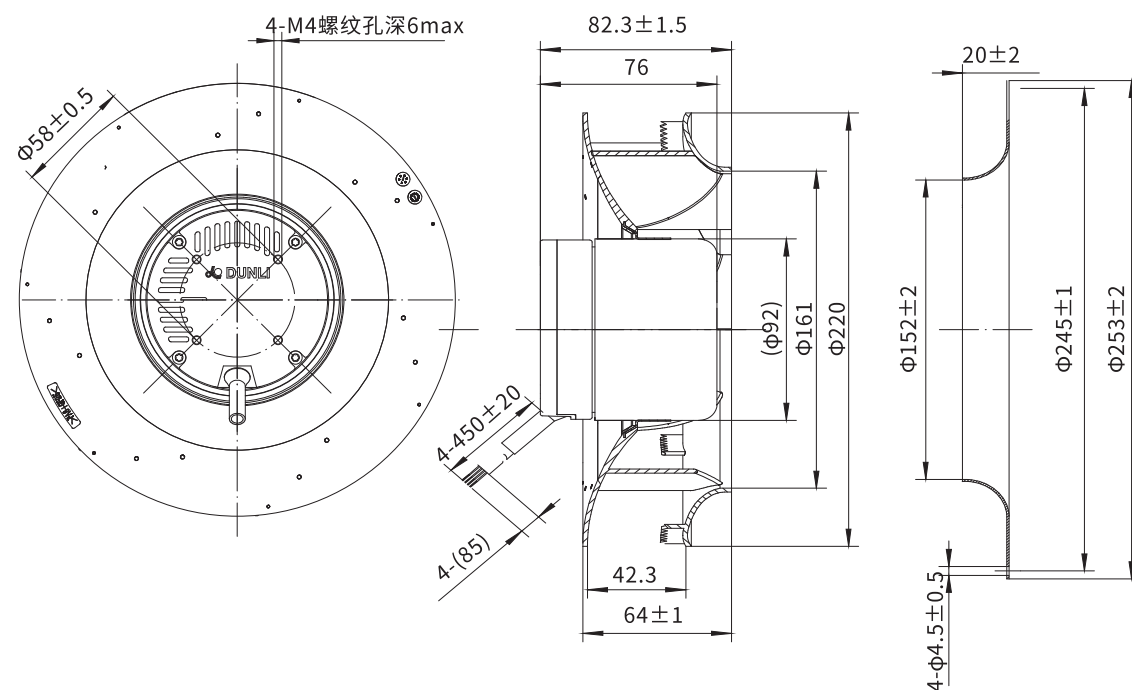

DC Backward Curved Centrifugal Fan

ErP2015
EXCEEDS THE NORM



DC92-B225


防护等级 (Level of protection): IP42

绝缘等级 (Insulation class): B

产品认证 (Approval): CE、CCC

轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC92-B225	24	/	2700	108	4.4	76	-20~+60
DC92-B225	48	/	2700	108	2.2	76	-20~+60

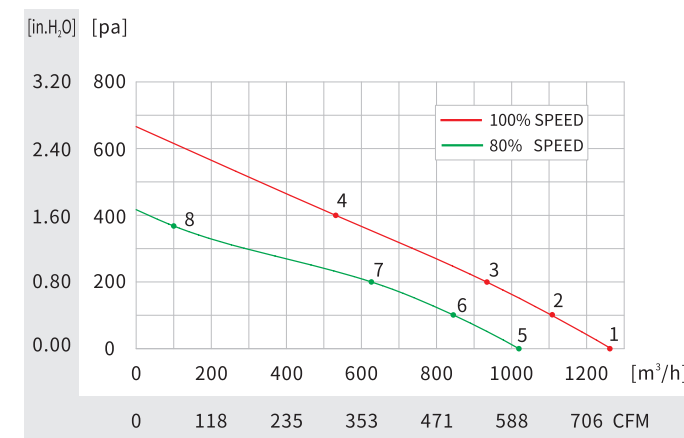

No.	转 速 Speed	输入功率 Input Power
	[RPM]	[W]
1	2726	114
2	2626	118.1
3	2505	118.5
4	2498	117.8
5	2179	58.8
6	2086	63.9
7	2024	67.9
8	2253	54.5

