

DC Forward Curved Centrifugal Fan


ErP2015
EXCEEDS THE NORM

DC92-F133




类型(Type): 双进风 Dual-Inlet
防护等级 (Level of protection): IP42
绝缘等级 (Insulation class): B
产品认证 (Approval): CE、CCC、UL
轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC92-F133	24	/	1600	105	4.4	67	-20~+60
DC92-F133	48	/	1600	105	2.2	67	-20~+60

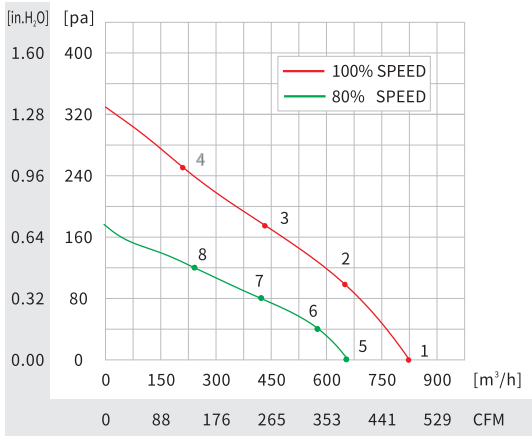

No.	转 速 Speed	输入功率 Input Power
	[RPM]	[W]
1	1633	108
2	1854	89
3	2122	76
4	2317	59
5	1310	55
6	1394	48
7	1527	39
8	1674	31

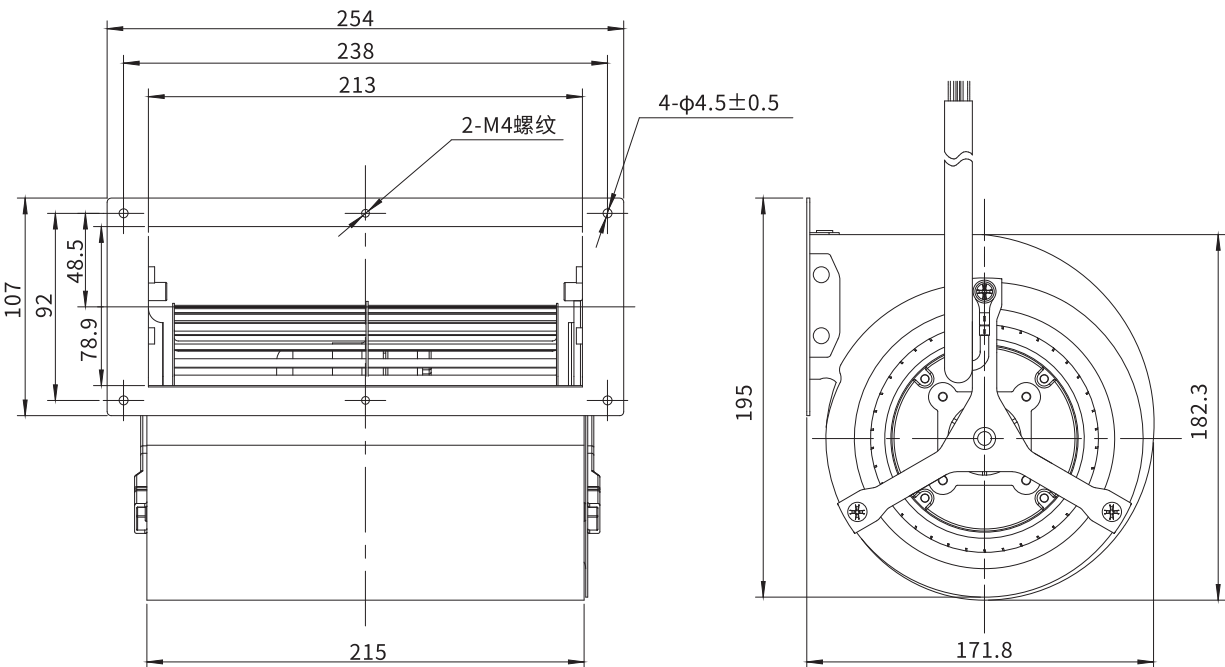

DC Forward Curved Centrifugal Fan


ErP2015
EXCEEDS THE NORM

DC92-F133



类型(Type): 双进风 Dual-Inlet
防护等级 (Level of protection): IP42
绝缘等级 (Insulation class): B
产品认证 (Approval): CE、CCC
轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC92-F133	310	/	1950	135	0.45	70	-20~+60

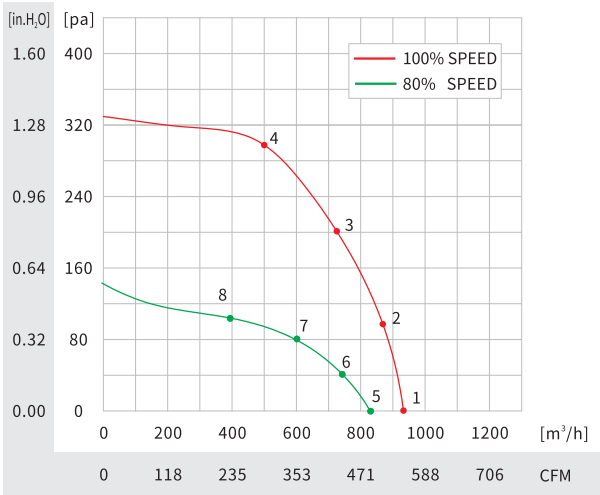

No.	转 速 Speed	输入功率 Input Power
	[RPM]	[W]
1	1753	143
2	2035	148
3	2413	156
4	2528	47
5	1641	115
6	1633	85
7	1643	58
8	1639	39

