

DC Forward Curved Centrifugal Fan


ErP2015
EXCEEDS THE NORM

DC92-F146




类型(Type): 双进风 Dual-Inlet
防护等级 (Level of protection): IP42
绝缘等级 (Insulation class): B
产品认证 (Approval): CE、CCC
轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC92-F146	24	/	1450	105	4.4	67	-20~+60
DC92-F146	48	/	1450	105	2.2	67	-20~+60

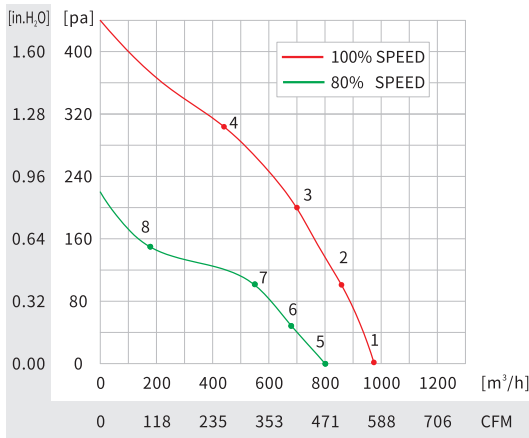

No.	转 速 Speed	输入功率 Input Power
	[RPM]	[W]
1	1401	113
2	1613	113
3	1876	113
4	2214	94
5	1127	57
6	1220	51
7	1335	43
8	1599	28

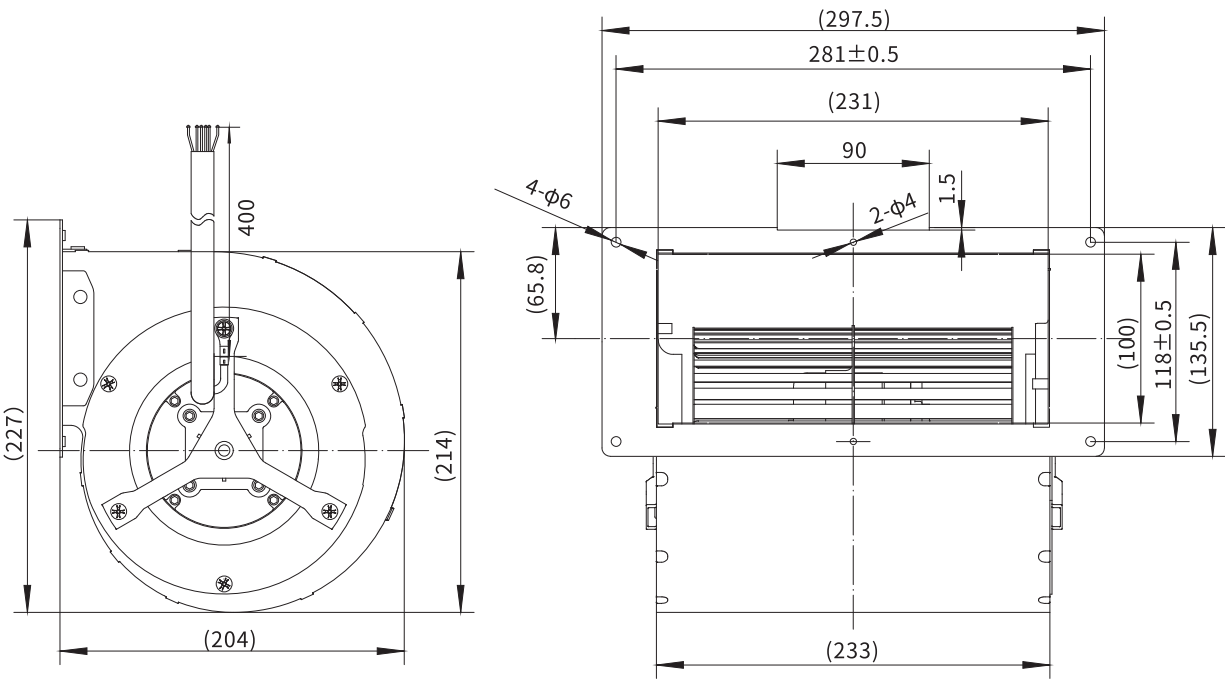

DC Forward Curved Centrifugal Fan


ErP2015
EXCEEDS THE NORM

DC92-F146



类型(Type): 双进风 Dual-Inlet
防护等级 (Level of protection): IP42
绝缘等级 (Insulation class): B
产品认证 (Approval): CE、CCC
轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC92-F146	310	/	1670	135	0.45	72	-20~+60

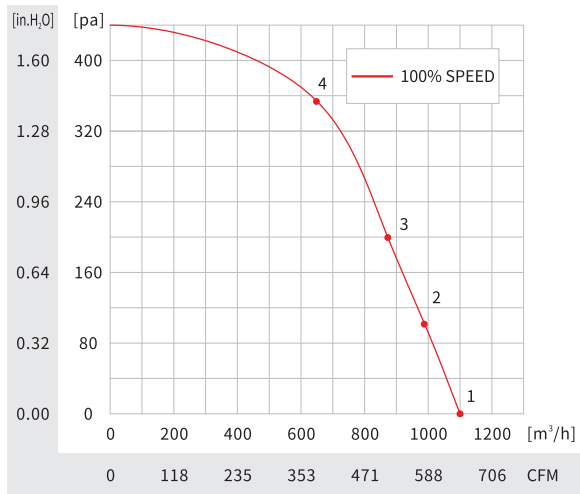

No.	转 速 Speed	输入功率 Input Power
	[RPM]	[W]
1	1645	136
2	1831	138
3	1999	136
4	2364	144

