

EC Backward Curved Centrifugal Fan


ErP2015
EXCEEDS THE NORM




EC102-B400-L142

防护等级 (Level of protection): IP44
绝缘等级 (Insulation class): B
产品认证 (Approval): CE、CCC
轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
EC102-B400-L142	220/230	50/60	1460	300	1.4	75	-20~+60

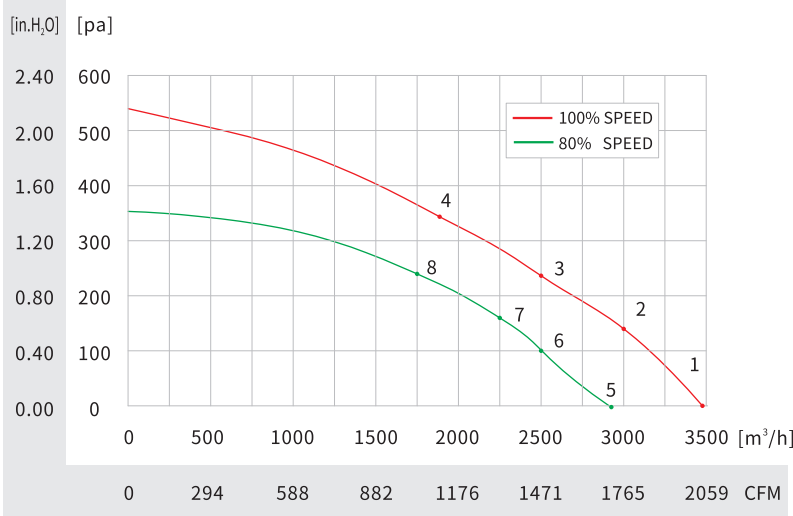

No.	转 速 Speed [RPM]	输入功率 Input Power [W]
1	1459	253.7
2	1415	293.0
3	1337	279.9
4	1352	283.6
5	1200	134.0
6	1205	172.5
7	1203	194.3
8	1201	205.9

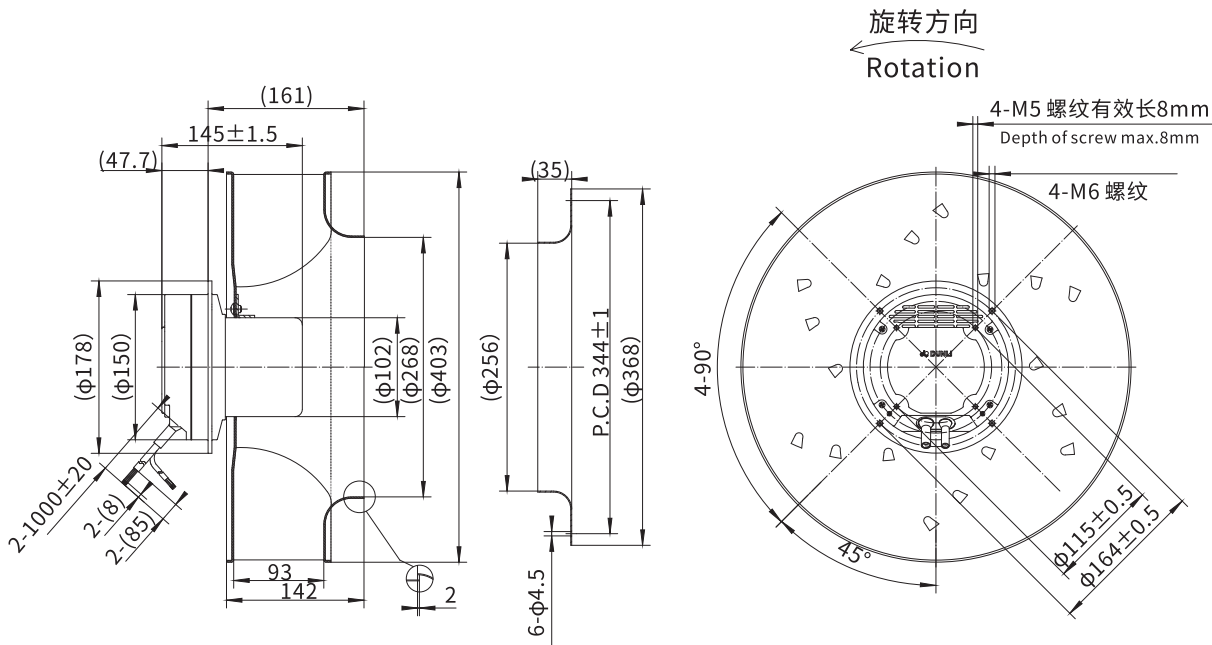

EC Backward Curved Centrifugal Fan


ErP2015
EXCEEDS THE NORM



EC102-B400-L142

防护等级 (Level of protection): IP44
绝缘等级 (Insulation class): B
产品认证 (Approval): CE、CCC
轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
EC102-B400-L142	220/230	50/60	1700	450	2.0	78	-20~+60

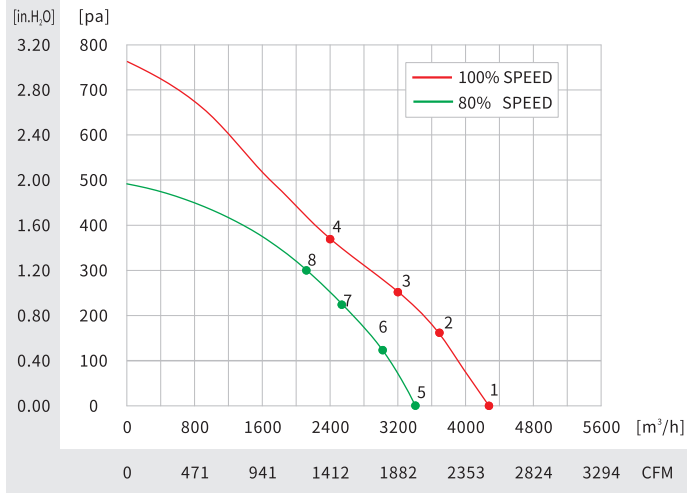

No.	转 速 Speed [RPM]	输入功率 Input Power [W]
1	1728	462.2
2	1662	459.4
3	1609	457.3
4	1554	453.7
5	1389	236.9
6	1390	271.2
7	1391	318.4
8	1392	337.7

