

 Φ630-5

ErP2015
EXCEEDS THE NORM

Φ 630-5 系列轴流风机



Φ 630-5 Series Axial Fan

材 质：转子铸铝
Material: Aluminum casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearing: Maintenance Free Ball Bearing




4-Pole

6-Pole

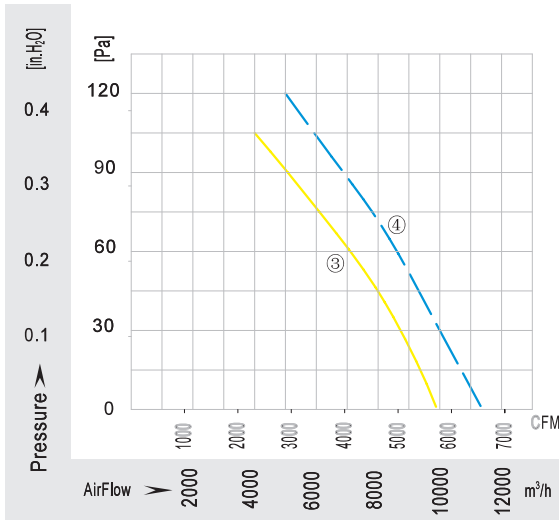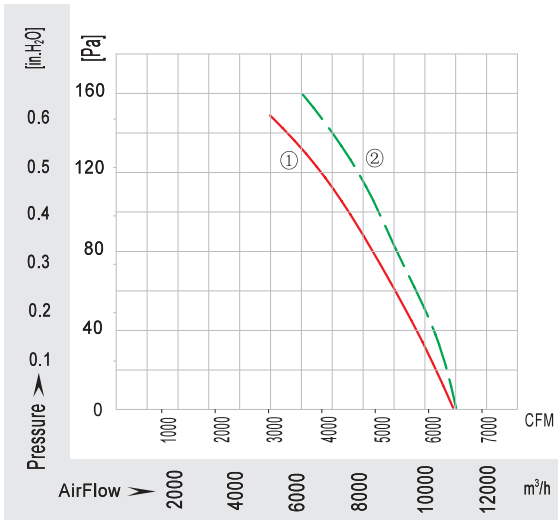


 Φ630-5

Model No.D

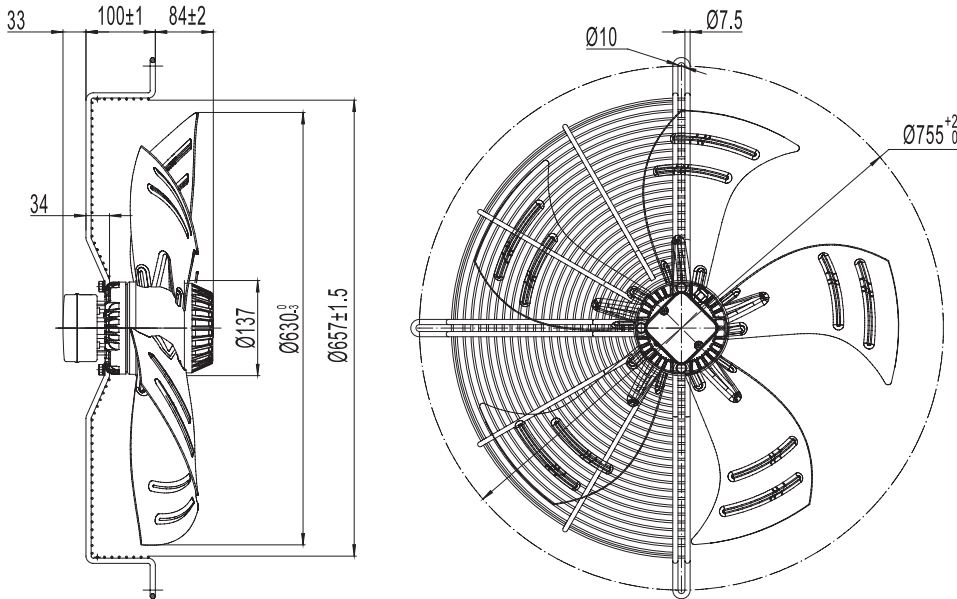

Model No.F1

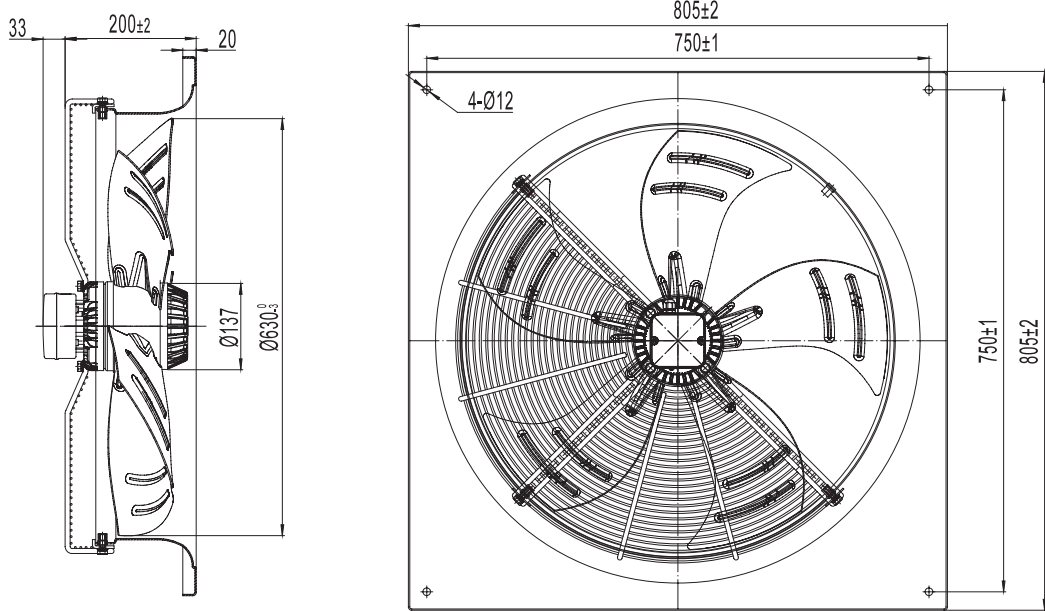


 B型网罩	 C型网罩	 D型网罩	 G型网罩	 F型正扣面板	 F型反扣面板
Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A4S-630S-5BIA00	YWF.A4S-630S-5CIA00	YWF.A4S-630S-5DIA00	YWF.A4S-630S-5GIA00	YWF.A4S-630S-5FIA00	YWF.A4S-630S-5FIA01
YWF.A4T-630S-5BIA00	YWF.A4T-630S-5CIA00	YWF.A4T-630S-5DIA00	YWF.A4T-630S-5GIA00	YWF.A4T-630S-5FIA00	YWF.A4T-630S-5FIA01
YWF.A6S-630S-5BIA00	YWF.A6S-630S-5CIA00	YWF.A6S-630S-5DIA00	YWF.A6S-630S-5GIA00	YWF.A6S-630S-5FIA00	YWF.A6S-630S-5FIA01
YWF.A6T-630S-5BIA00	YWF.A6T-630S-5CIA00	YWF.A6T-630S-5DIA00	YWF.A6T-630S-5GIA00	YWF.A6T-630S-5FIA00	YWF.A6T-630S-5FIA01

 E型导风筒	电压 Voltage	频率 Frequency	电 流 Current	输入功率 Input Power	转速 Speed	电容 Capacitor	风量 Air Flow(OPa)	噪音 Noise	曲线 Curve No.	运行温度 Operating Temperature	认证 Approvals
Model No.E	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.A4S-630S-5EIA00	220/230	50	3.70	800	1360	16	10800/6381	74	①	-30/+60	CCC,CE,RoHs
		60	5.34	1150	1500		11000/6500	75	②		
YWF.A4T-630S-5EIA00	380/400	50	1.60	850	1350	/	10800/6381	73	①	-30/+60	CCC,CE,RoHs
		60	1.80	1010	1540		11000/6500	75	②		
YWF.A6S-630S-5EIA00	220/230	50	2.50	520	910	12	9500/5613	67	③	-30/+60	CCC,CE,RoHs
		60	3.25	705	1050		10500/6204	70	④		
YWF.A6T-630S-5EIA00	380/400	50	1.40	550	900	/	9500/5613	67	③	-30/+60	CCC,CE,RoHs
		60	1.56	740	1060		10500/6204	69	④		


E-mail: zakaz@ventilatorry.ru

Φ630-5


Model No.B

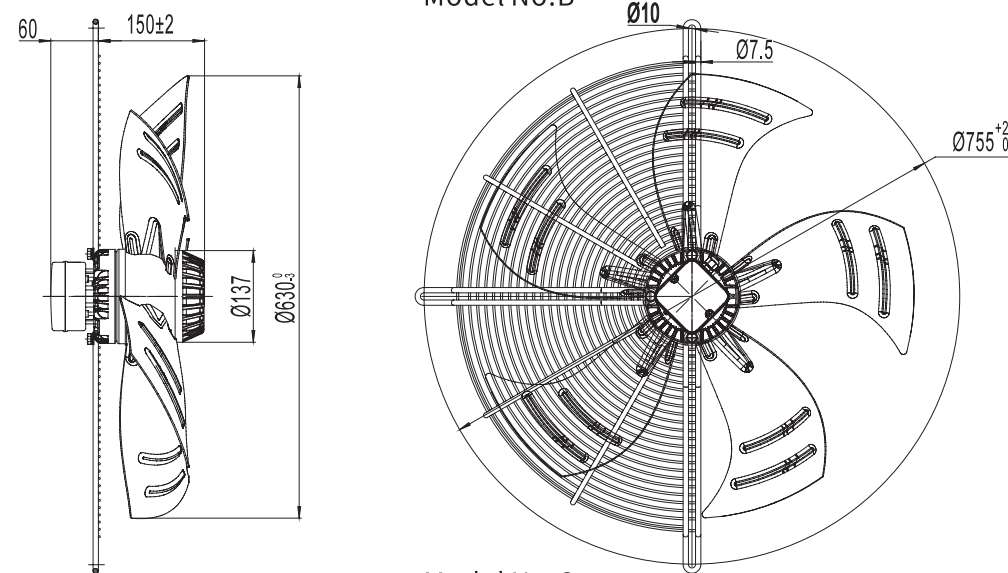

Model No.C

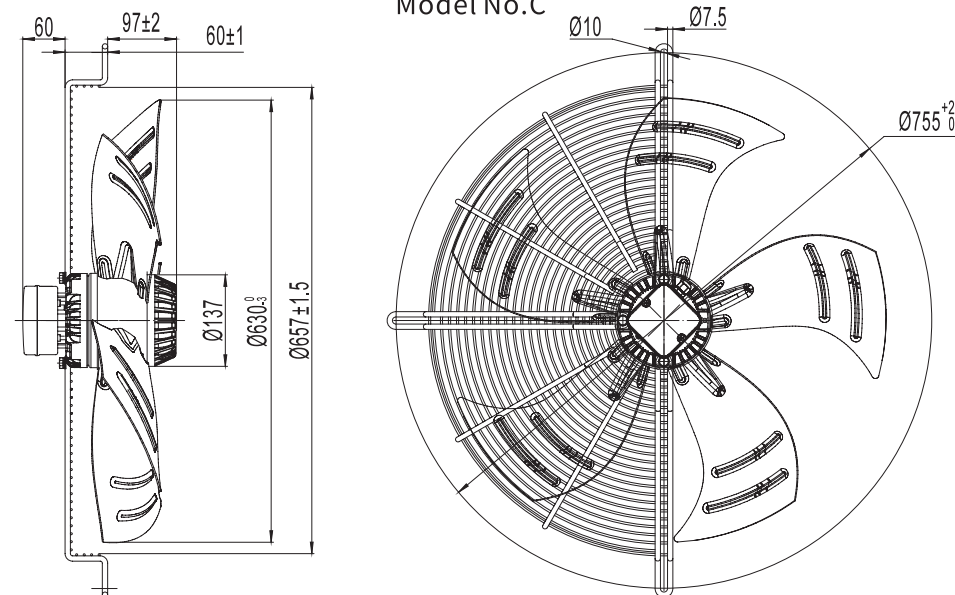


Model No.G

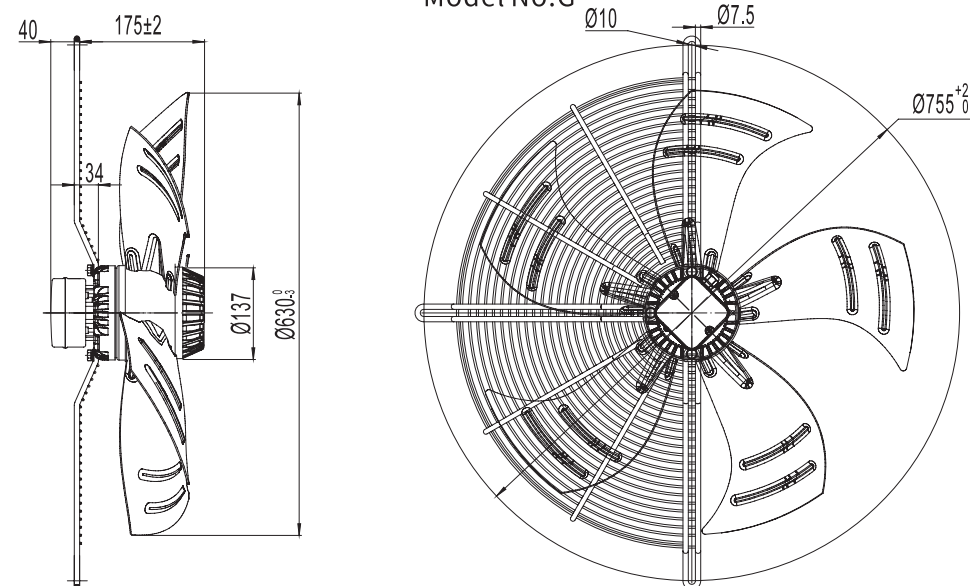

Φ630-5

Model No.E

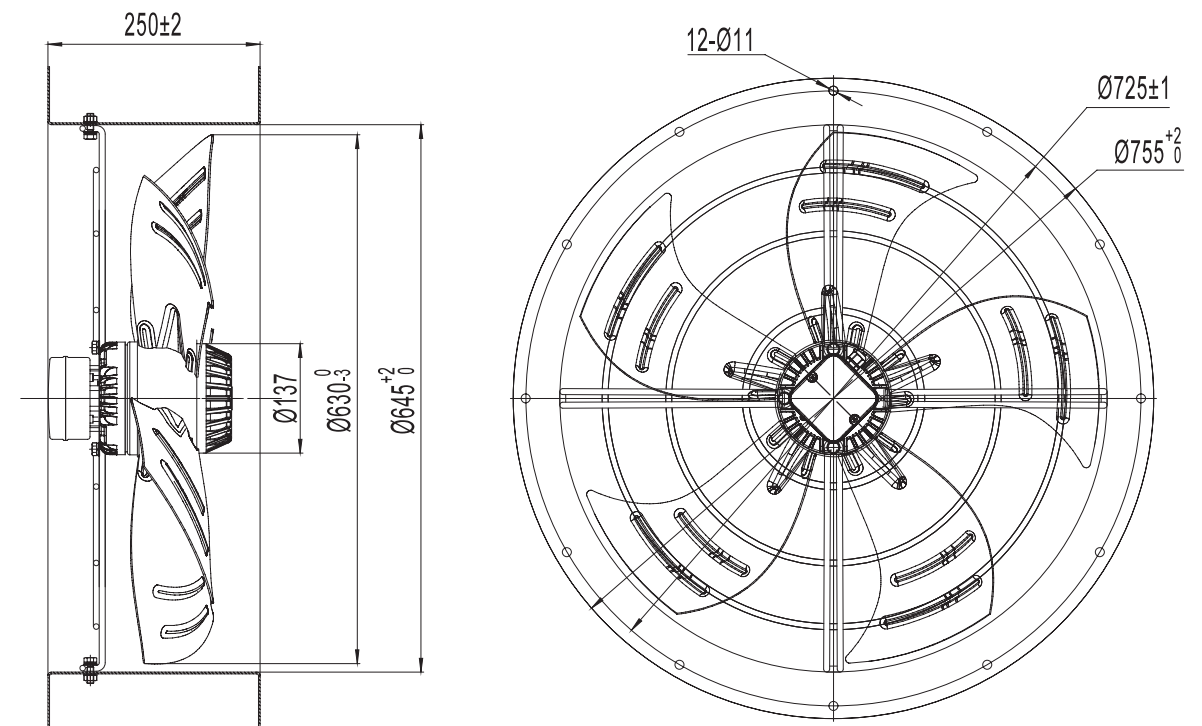

Model No.F0

