


 Φ180



Φ 180 系列后倾离心风机

Φ 180 Series Backward Centrifugal Fan

- 材 质：风轮PA6、转子铸铝
- 保护等级: IP44
- 绝缘等级: F
- 轴 承: 免维护滚珠球轴承



Material: Impeller: PA6 Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing


 Φ190



Φ 190 系列后倾离心风机

Φ 190 Series Backward Centrifugal Fan

- 材 质：风轮PA6、转子铸铝
- 保护等级: IP44
- 绝缘等级: F
- 轴 承: 免维护滚珠球轴承





Material: Impeller: PA6 Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing

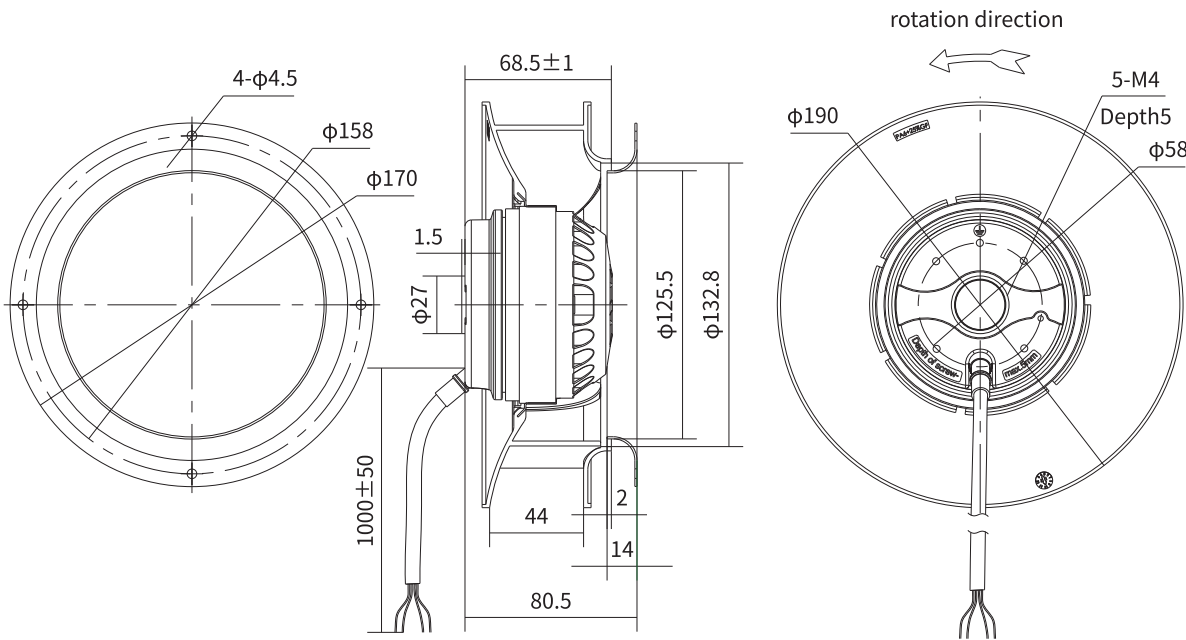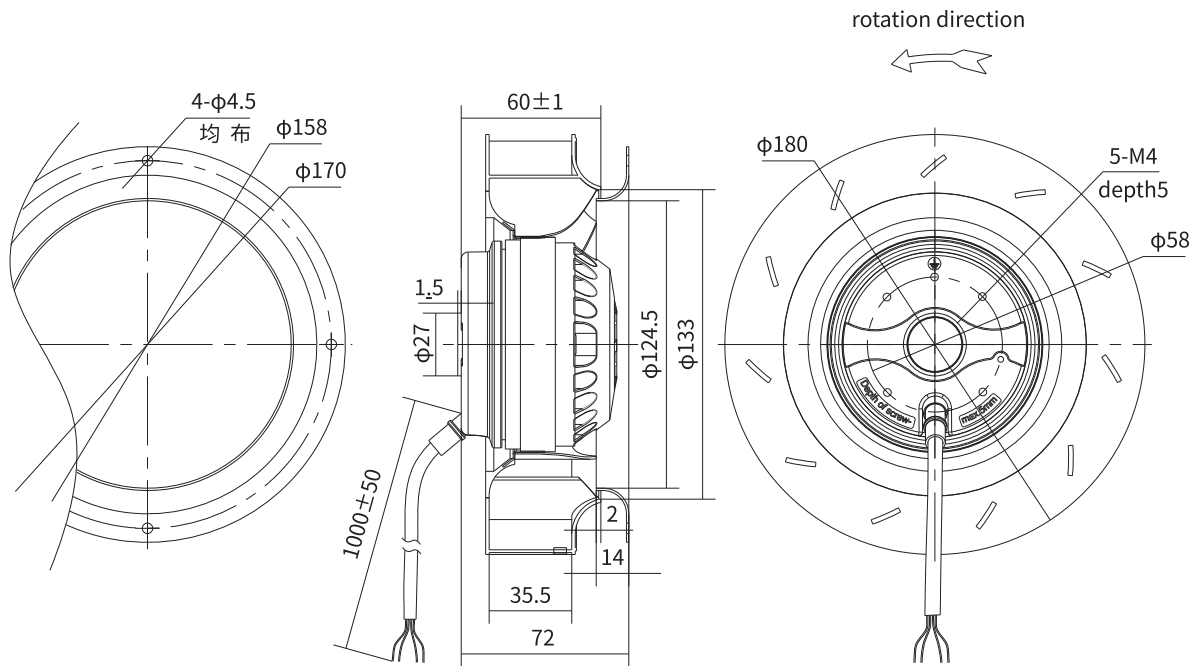

	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Curve No.	Operating Temperature	Approvals
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.B2S-180-047AB0A	115/120	60	0.51	61	3050	6.0	475/278	68	②	-30/+60	RoHs
YWF.B2S-180-047AB00	220/230	50	0.19	40	2580	2.0	410/250	57	①	-30/+60	CCC,CE,RoHs
	220/230	60	0.26	53	2830	2.0	460/270	67	②	-30/+60	CE,RoHs

	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Curve No.	Operating Temperature	Approvals
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.B2S-190-060AB0A	115/120	60	0.75	85	2760	8.0	525/308	69	③	-30/+60	UL,RoHs
YWF.B4S-190-060AB00	220/230	60	0.14	30	1610	1.0	305/180	58	④	-30/+60	RoHs
YWF.B2S-190-060AB00	220/230	50	0.31	68	2600	3.0	480/282	68	①	-30/+60	CCC,CE,RoHs
	220/230	60	0.41	85	2900	3.0	550/320	70	②	-30/+60	CE,RoHs
YWF.B2T-190-060AB00	380/400	50	0.13	58	2460	/	450/265	67	⑤	-30/+60	CCC,CE,RoHs
	400	60	0.13	70	2620	/	480/282	69	②	-30/+60	CE,RoHs