


 Φ160

Φ 160 系列前倾离心风机

Φ 160 Series Forward Centrifugal Fan

- 材 质：风轮镀锌板、转子铸铝
- 保护等级: IP44
- 绝缘等级: F
- 轴 承: 免维护滚珠球轴承



Material: Impeller: Steel Sheet Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F


Bearing: Maintenance free ball bearing

 Φ180

Φ 180 系列前倾离心风机

Φ 180 Series Forward Centrifugal Fan

- 材 质：风轮镀锌板、转子铸铝
- 保护等级: IP54
- 绝缘等级: F
- 轴 承: 免维护滚珠球轴承





Material: Impeller: Steel Sheet Rotor: Aluminum Casting

Protection Class: IP54



Insulation Class: F

Bearing: Maintenance free ball bearing

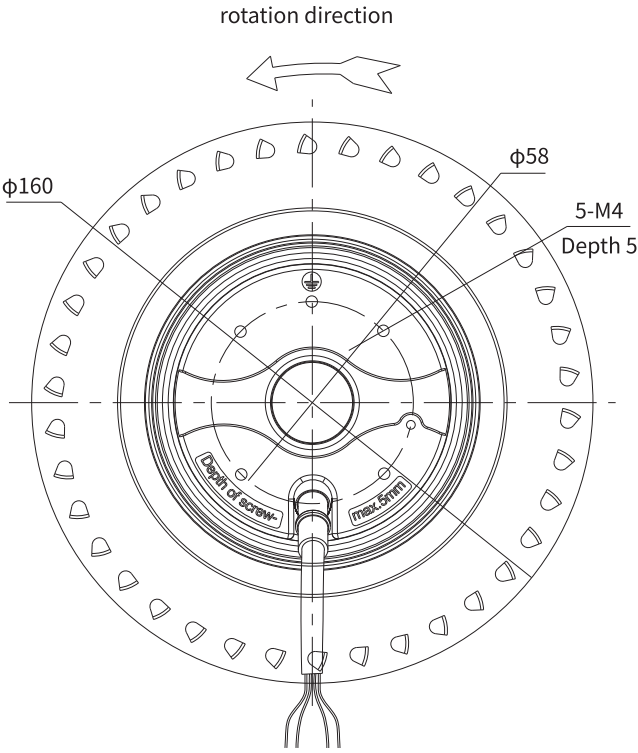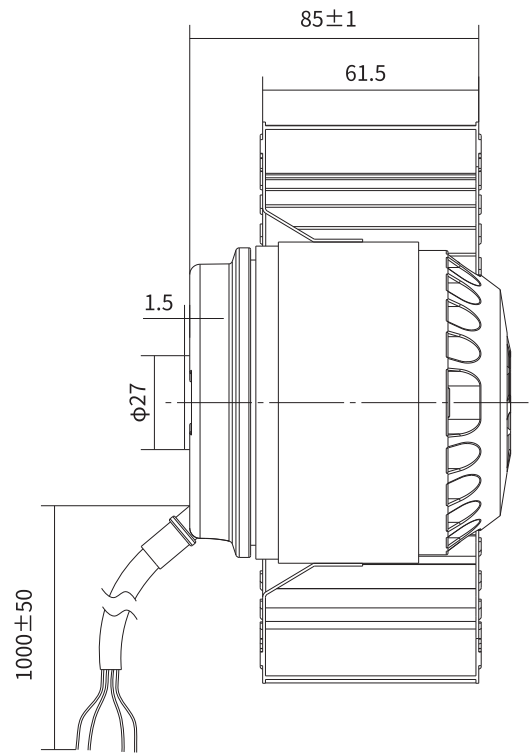

备注：此款风机可正反向定制

Remarks: This fan can be designed as clockwise and counterclockwise rotation

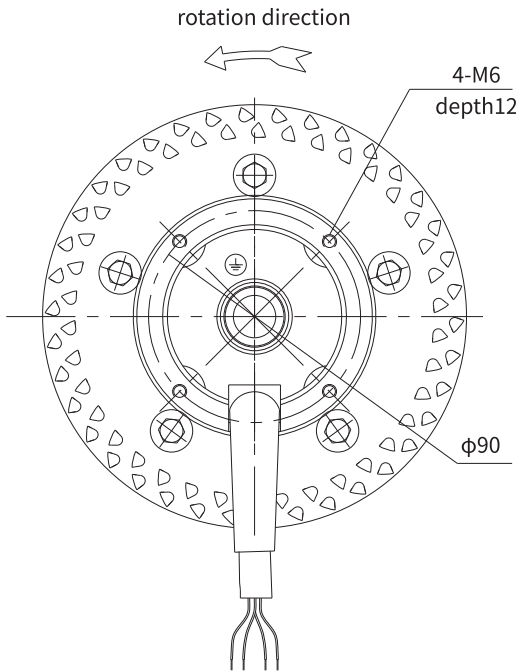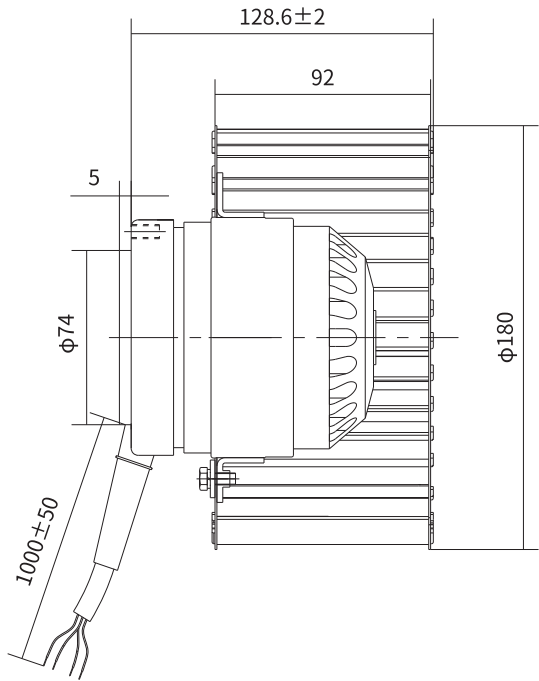

|                     | 电 压     | 频 率       | 电 流     | 输入功率        | 转 速   | 电 容       | 风 量      | 噪 音   | 曲线        | 运行温度                  | 认 证         |
|---------------------|---------|-----------|---------|-------------|-------|-----------|----------|-------|-----------|-----------------------|-------------|
|                     | Voltage | Frequency | Current | Input Power | Speed | Capacitor | Air Flow | Noise | Curve No. | Operating Temperature | Approvals   |
| Model No.           | V       | Hz        | A       | W           | RPM   | μF        | m³/h/CFM | dB(A) | #         | Min/Max(°C)           |             |
| YWF.F4S-180-092AX0A | 115/120 | 50        | 1.23    | 98          | 1430  | 12        | 750/441  | 57    | ①         | -30/+60               | RoHs        |
|                     | 115/120 | 60        | 1.00    | 108         | 1700  | 12        | 800/471  | 61    | ②         | -30/+60               | RoHs        |
| YWF.F4S-180-092AX00 | 220/230 | 50        | 0.60    | 95          | 1450  | 3.5       | 750/441  | 57    | ①         | -30/+60               | CCC,CE,RoHs |
|                     | 220/230 | 60        | 0.48    | 100         | 1710  | 3.5       | 800/471  | 61    | ②         | -30/+60               | CE,RoHs     |
| YWF.F4T-180-092AX00 | 380/400 | 50        | 0.28    | 70          | 1400  | /         | 750/441  | 57    | ①         | -30/+60               | CCC,CE,RoHs |
|                     | 380/400 | 60        | 0.23    | 87          | 1685  | /         | 800/471  | 61    | ②         | -30/+60               | CE,RoHs     |
| YWF.F6S-180-092AX00 | 220/230 | 50        | 0.37    | 68          | 970   | 3         | 510/300  | 46    | ③         | -30/+60               | CCC,CE,RoHs |
|                     | 220/230 | 60        | 0.29    | 63          | 1150  | 3         | 590/347  | 48    | ④         | -30/+60               | CE,RoHs     |

|                     | 电 压     | 频 率       | 电 流     | 输入功率        | 转 速   | 电 容       | 风 量      | 噪 音   | 曲线        | 运行温度                  | 认 证         |
|---------------------|---------|-----------|---------|-------------|-------|-----------|----------|-------|-----------|-----------------------|-------------|
|                     | Voltage | Frequency | Current | Input Power | Speed | Capacitor | Air Flow | Noise | Curve No. | Operating Temperature | Approvals   |
| Model No.           | V       | Hz        | A       | W           | RPM   | μF        | m³/h/CFM | dB(A) | #         | Min/Max(°C)           |             |
| YWF.F4S-160-060AX0A | 115/120 | 60        | 0.58    | 68          | 1700  | 10        | 440/260  | 59    | ②         | -30/+60               | RoHs        |
| YWF.F2S-160-060AX00 | 220/230 | 50        | 0.66    | 140         | 2670  | 6         | 560/325  | 68    | ①         | -30/+60               | CCC,CE,RoHs |