

## Product Data Sheet 8556 TA

**ebm****papst**

The engineer's choice



## 8556 TA

## INDEX

|          |                                 |          |
|----------|---------------------------------|----------|
| <b>1</b> | <b>General .....</b>            | <b>3</b> |
| <b>2</b> | <b>Mechanics .....</b>          | <b>3</b> |
| 2.1      | GENERAL.....                    | 3        |
| 2.2      | CONNECTIONS .....               | 4        |
| <b>3</b> | <b>Operating Data.....</b>      | <b>5</b> |
| 3.1      | ELECTRICAL OPERATING DATA ..... | 5        |
| 3.2      | ELECTRICAL FEATURES .....       | 6        |
| 3.3      | AERODYNAMICS .....              | 6        |
| 3.4      | SOUND DATA .....                | 7        |
| <b>4</b> | <b>Environment.....</b>         | <b>7</b> |
| 4.1      | GENERAL.....                    | 7        |
| 4.2      | CLIMATIC REQUIREMENTS*).....    | 7        |
| <b>5</b> | <b>Safety.....</b>              | <b>8</b> |
| 5.1      | ELECTRICAL SAFETY .....         | 8        |
| 5.2      | APPROVAL TESTS .....            | 8        |
| <b>6</b> | <b>Reliability.....</b>         | <b>8</b> |
| 6.1      | GENERAL.....                    | 8        |

## 1 General

|                                     |                          |
|-------------------------------------|--------------------------|
| Fan type                            | Fan without chassis      |
| Rotating direction looking at rotor | Clockwise                |
| Airflow direction                   | Air intake over traverse |
| Bearing system                      | Ball bearing             |
| Mounting position - shaft           | Any                      |
| Balancing grade                     | 2,5                      |


## 2 Mechanics

### 2.1 General

|                   |          |  |
|-------------------|----------|--|
| Width             | 0,0 mm   |  |
| Height            | 0,0 mm   |  |
| Depth             | 37,0 mm  |  |
| Diameter          | 76,0 mm  |  |
| Mass              | 0,370 kg |  |
| Housing material  |          |  |
| Impeller material | Metal    |  |

## 2.2 Connections

|                       |              |  |
|-----------------------|--------------|--|
| Electrical connection | Wires        |  |
| Lead wire length      | L = 325,0 mm |  |
| Tolerance             | +/- 10,0 mm  |  |
| Tube length           | See drawing  |  |
| Tolerance             |              |  |
| Wire size (AWG)       | 18           |  |
| Insulation diameter   | 2,06 mm      |  |
| Plug                  | See drawing  |  |
| Contact               | See drawing  |  |

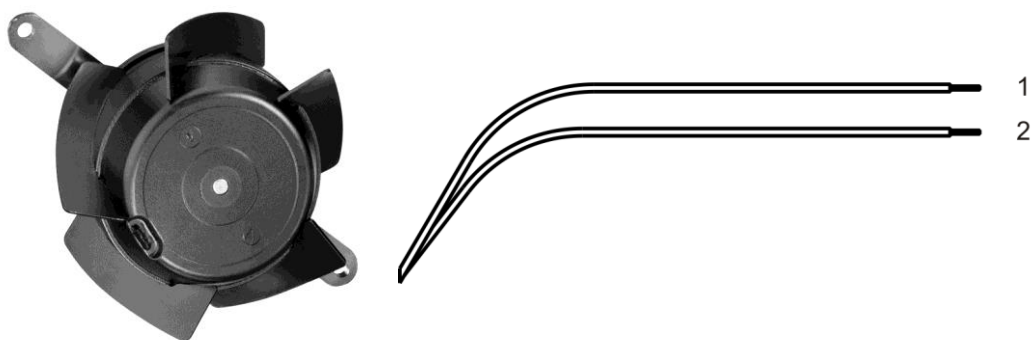

|   | Color | Operation |
|---|-------|-----------|
| 1 | black | L         |
| 2 | black | N         |


### **3      Operating Data**

#### **3.1    Electrical Operating Data**

For checking purposes the electrical data can be specified without an intake nozzle / aperture plate as well. For this the data have to defined by the appropriate quality assurance.

### 3.2 Electrical Features

|                         |           |
|-------------------------|-----------|
| Locked rotor protection | Impedance |
| Locked rotor current at |           |

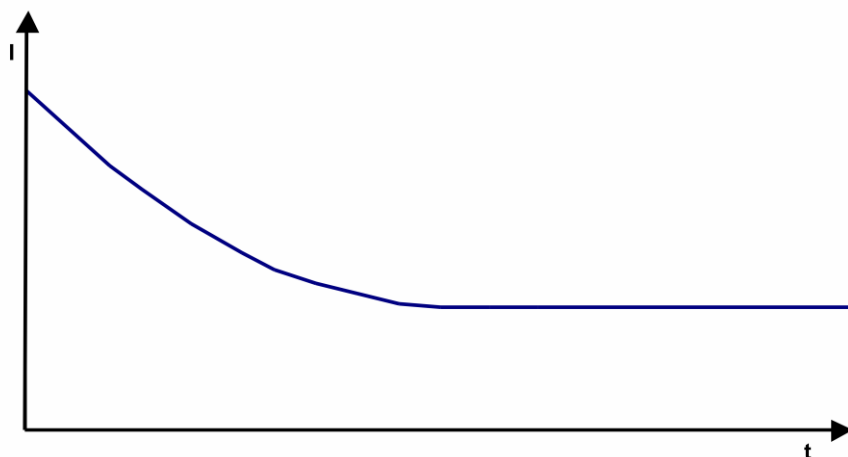

### 3.3 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
 Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
 In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.  
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

|                                                        |                                 |
|--------------------------------------------------------|---------------------------------|
| Measurement setup:                                     | Measured with an aperture plate |
| Aperture plate diameter:                               | 76,5 mm                         |
| Distance between mounting traverse and aperture plate: | 17 mm                           |

a.) Operation condition:  
 2.750 1/min at free air flow                      Frequency: 50 Hz

|                                                             |                        |
|-------------------------------------------------------------|------------------------|
| Max. free-air flow ( $\Delta p = 0$ / $\dot{V} = \max.$ )   | 34,0 m <sup>3</sup> /h |
| Max. static pressure ( $\Delta p = \max.$ / $\dot{V} = 0$ ) | 50 Pa                  |

b.) Operation condition:  
 3.250 1/min at free air flow                      Frequency: 60 Hz

|                                                             |                        |
|-------------------------------------------------------------|------------------------|
| Max. free-air flow ( $\Delta p = 0$ / $\dot{V} = \max.$ )   | 40,0 m <sup>3</sup> /h |
| Max. static pressure ( $\Delta p = \max.$ / $\dot{V} = 0$ ) | 68 Pa                  |

### 3.4 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

2.750 1/min at free air flow

Frequency: 50 Hz

|                                                                 |            |  |
|-----------------------------------------------------------------|------------|--|
| Optimal operating point                                         |            |  |
| Sound power level at the optimal operating point                |            |  |
| Sound pressure level at free air flow, measured in rubber bands | 28,0 dB(A) |  |

b.) Operation condition:

3.250 1/min at free air flow

Frequency: 60 Hz

|                                                                 |            |  |
|-----------------------------------------------------------------|------------|--|
| Optimal operating point                                         |            |  |
| Sound power level at the optimal operating point                |            |  |
| Sound pressure level at free air flow, measured in rubber bands | 33,0 dB(A) |  |

## 4 Environment

### 4.1 General

|                                            |                                  |  |
|--------------------------------------------|----------------------------------|--|
| Min. permitted ambient temperature TU min. | -40 °C / 50 Hz<br>-40 °C / 60 Hz |  |
| Max. permitted ambient temperature TU max. | 90 °C / 50 Hz<br>95 °C / 60 Hz   |  |
| Min. permitted storage temperature TL min. | -40 °C                           |  |
| Max. permitted storage temperature TL max. | 100 °C                           |  |

### 4.2 Climatic Requirements\*)

|                       |                                                               |  |
|-----------------------|---------------------------------------------------------------|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days |  |
| Water exposure        | None                                                          |  |
| Dust requirements     | None                                                          |  |
| Salt fog requirements | None                                                          |  |

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

## 5 Safety

### 5.1 Electrical Safety

|                                                                                                                                                                                                                                                                                                                                                                                           |                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| Dielectric strength<br>DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700)<br>A.) Type test<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C.<br>No arcing or breakdown is allowed!<br>All connections together to ground.<br>B.) Routine test<br>Measuring conditions: At indoor climate.<br>No arcing or breakdown is allowed!<br>All connections together to ground. | 1500 VAC / 1 Min.<br><br>1500 VAC / 1 Sec. |
| Isolation resistance<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.                                                                                                                                                                                                                                                                | RI > 50 MOhm                               |
| Clearance / creepage distance                                                                                                                                                                                                                                                                                                                                                             | 2,0 mm / 1,8 mm                            |
| Protection class                                                                                                                                                                                                                                                                                                                                                                          | I                                          |

### 5.2 Approval Tests

|     |                                                                     |                                                                               |
|-----|---------------------------------------------------------------------|-------------------------------------------------------------------------------|
| CE  | EC Declaration of Conformity                                        | Yes                                                                           |
| EAC | Eurasian Conformity                                                 | Yes                                                                           |
| UL  | Underwriters Laboratories                                           | Yes / UL507, Electric Fans                                                    |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association                                      | Yes / C22.2 No. 113 Fans and Ventilators                                      |
| CCC | China Compulsory Certification                                      | Yes / GB 12350 Safety Requirements for small Power Motors                     |

The approval tests are observed to:

U approval max.: 230 V / f: 60 Hz @ TU approval max.: 90 °C


## 6 Reliability

### 6.1 General

|                                   |                                      |  |
|-----------------------------------|--------------------------------------|--|
| Life expectancy L10 at TU = 40 °C | 52.500 h / 50 Hz<br>55.000 h / 60 Hz |  |
| Life expectancy L10 at TU max.    | 15.000 h / 50 Hz<br>15.000 h / 60 Hz |  |

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN 34 beachten

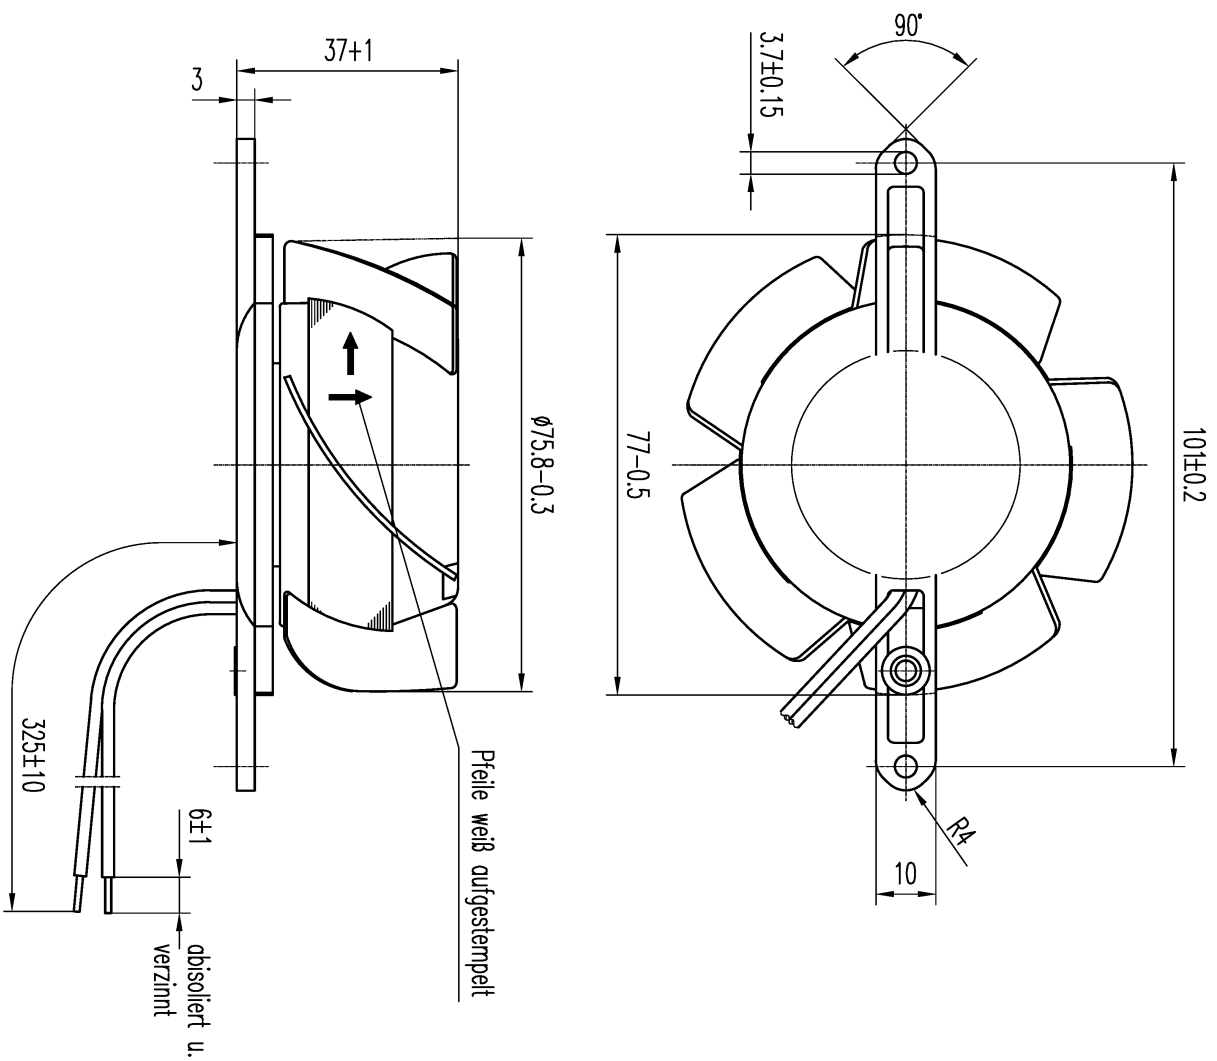

Axialspiel bei  
Kugellagerung (K) : 0 (mit Federausgleich)  
Gleitlagerung (G) : 0.1 – 0.6

|                  |         |  |  |  |  |  |  |  |  |
|------------------|---------|--|--|--|--|--|--|--|--|
| gilt für         |         |  |  |  |  |  |  |  |  |
| G 92/4 401/4 656 | 8830 JA |  |  |  |  |  |  |  |  |
| G 92/4 401/4 655 | 8800 JA |  |  |  |  |  |  |  |  |
| G 92/4 401/4 657 | 8550 JA |  |  |  |  |  |  |  |  |
| G 92/4 401/4 654 | 8530 JA |  |  |  |  |  |  |  |  |
| K 92/4 401/4 653 | 8506 JA |  |  |  |  |  |  |  |  |
| K 92/4 401/4 657 | 8556 JA |  |  |  |  |  |  |  |  |
| G 92/4 401/4 659 | 8880 JA |  |  |  |  |  |  |  |  |
| G 92/4 401/4 658 | 8860 JA |  |  |  |  |  |  |  |  |

## Allgemeintoleranzen

DIN ISO 2768-C

Artikel

Maßstab

Zchg.-Nr.

1

Ers.f.Zchg.:

**PAPST**  
 PAPST-MOTOREN GmbH & Co KG  
 D-78112 St. Georgen  
 Germany

| Index                                             | Änd.-Nr. | Datum | Geändert von |
|---------------------------------------------------|----------|-------|--------------|
| Zur Verwendung im Verteiler freigegeben<br>von am |          |       |              |

084

210

232

235

240

243

516