

Max. 170 m³/h

DC axial fans

Ø 127 mm



- **Material:** Housing: GRP¹⁾ (PBT)
Impeller: GRP¹⁾ (PA)
- **Direction of air flow:** Exhaust over struts
- **Direction of rotation:** Counterclockwise, looking towards rotor
- **Connection:** Via single wires AWG 24, TR 64
- **Highlights:** Ball bearings and sleeve bearings available
Optional:
- Reversible direction of rotation
- Symmetrical impeller
- **Weight:** 170 g

- **Possible special versions:**
(See chapter DC fans - specials)
 - Speed signal
 - Go / NoGo alarm
 - External temperature sensor
 - Internal temperature sensor
 - PWM control input
 - Analog control input
 - Moisture protection
 - Reversible direction of rotation
 - Symmetrical impeller

1) Fiberglass-reinforced plastic

Series 4400 F


Nominal data		Air flow	Air flow	Nominal voltage	Voltage range	Sound pressure level	Sound power level	Sintec sleeve bearings	Ball bearings	Power consumption	Nominal speed	Temperature range	Service life L ₁₀ (40 °C) ebm-papst standard	Service life L ₁₀ (T _{max}) ebm-papst standard	Life expectancy L ₁₀ PC (40 °C) see page 17	Curve
Type		m ³ /h	cfm	VDC	VDC	dB(A)	Bel(A)	■	■	Watts	rpm ⁻¹	°C	Hours	Hours		
NEW	4412 FGL-573	91	54	12	7...15	26	3.9	■	■	1.2	1 600	-20...+75	80 000 / 32 500	135 000	①	
NEW	4412 FGML*	114	67	12	7...12.6	32	4.3	■	■	2.0	1 950	-20...+75	75 000 / 30 000	127 500	③	
NEW	4412 FGM*	140	82	12	7...12.6	38	4.8	■	■	3.2	2 400	-20...+75	75 000 / 27 500	117 500	③	
NEW	4412 FG*	170	100	12	8...12.6	43	5.3	■	■	5.3	2 900	-20...+60	60 000 / 37 500	102 500	④	

Subject to change

* On request

Other voltage versions (24 VDC, 48 VDC), speed variations and ball bearing designs are available as additional variants.

n rpm ⁻¹	P _{ed} W	L _{WA} dB(A)	n rpm ⁻¹	P _{ed} W	L _{WA} dB(A)
① ① 1515	1	44	③ ① 2225	4	51
① ② 1516	1	38	③ ② 2235	4	50
① ③ 1547	1	40	③ ③ 2304	4	51
① ④ 1567	1	39	③ ④ 2369	4	52
② ① 1856	2	50	④ ① 2670	6	59
② ② 1848	2	44	④ ② 2685	6	59
② ③ 1882	2	44	④ ③ 2783	6	56
② ④ 1929	2	46	④ ④ 2869	6	57

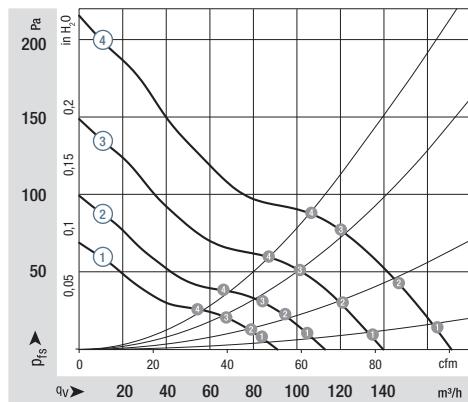

Air performance measured according to: ISO 5801.
Installation category A, without contact protection.
Noise: Total sound power level L_{WA} ISO 103002
measured on a hemisphere with a radius of 2 m.
Sound pressure level L_{pA} measured at 1 m distance
from fan axis.
The values given are applicable only under the specified
measuring conditions and may differ depending on the
installation conditions.
In the event of deviation from the standard configuration,
the parameters must be checked after installation!
For detailed information see
<http://www.ebmpapst.com/general-conditions>

