

A3G300-AL11-03

EC axial fan - HyBlade®

sickled blades (S series)



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142

Nominal data

Type	A3G300-AL11-03	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed	min ⁻¹	1660
Power input	W	98
Current draw	A	0.8
Max. back pressure	Pa	80
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



A3G300-AL11-03

EC axial fan - HyBlade®

sickled blades (S series)

Technical features


Size	300 mm
Surface of rotor	Passivated
Material of impeller	PP-GF40 plastic
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Over-temperature protected electronics / motor - Line undervoltage detection
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Locked-rotor protection
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1
Approval	CCC

A3G300-AL11-03

EC axial fan - HyBlade®

sickled blades (S series)

Product drawing

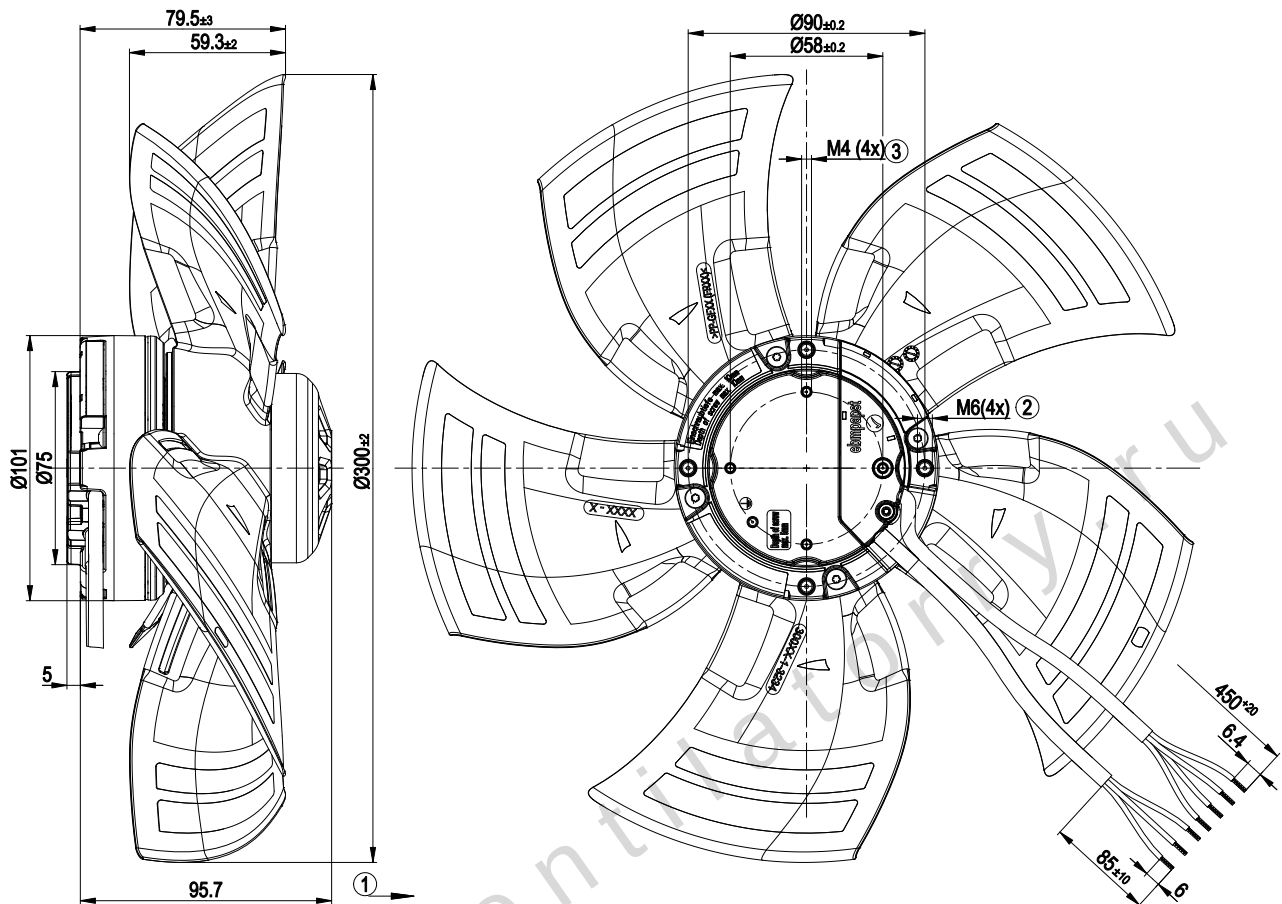


1	Direction of air flow "V"
2	Depth of screw max. 10 mm
3	Depth of screw max. 5 mm
4	Connection line PVC 4x AWG22, 4x brass lead tips crimped
5	Connection line PVC 3x AWG20, 3x brass lead tips crimped

A3G300-AL11-03

EC axial fan - HyBlade®

sickled blades (S series)

Connection screen

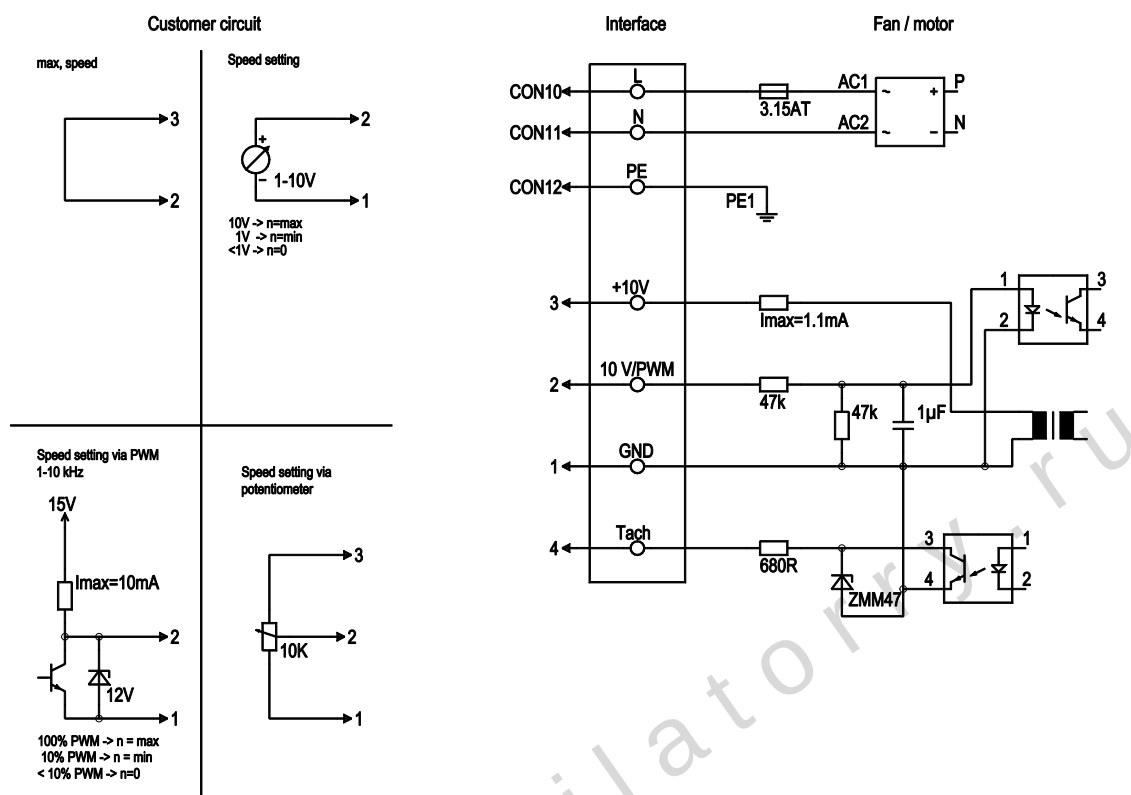


No.	Conn.	Designation	Colour	Function / assignment
	CON10	L	black	Power supply 230 VAC, 50-60 Hz, for voltage range refer to rating plate
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND - Connection for control interface
	2	0- 10V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
	3	10V/ max 1.1mA	red	Voltage output 10V/ 1.1mA, electrically isolated, not short-circuit-proof.
	4	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated

A3G300-AL11-03

EC axial fan - HyBlade®

sickled blades (S series)

Charts: Air flow 50 Hz

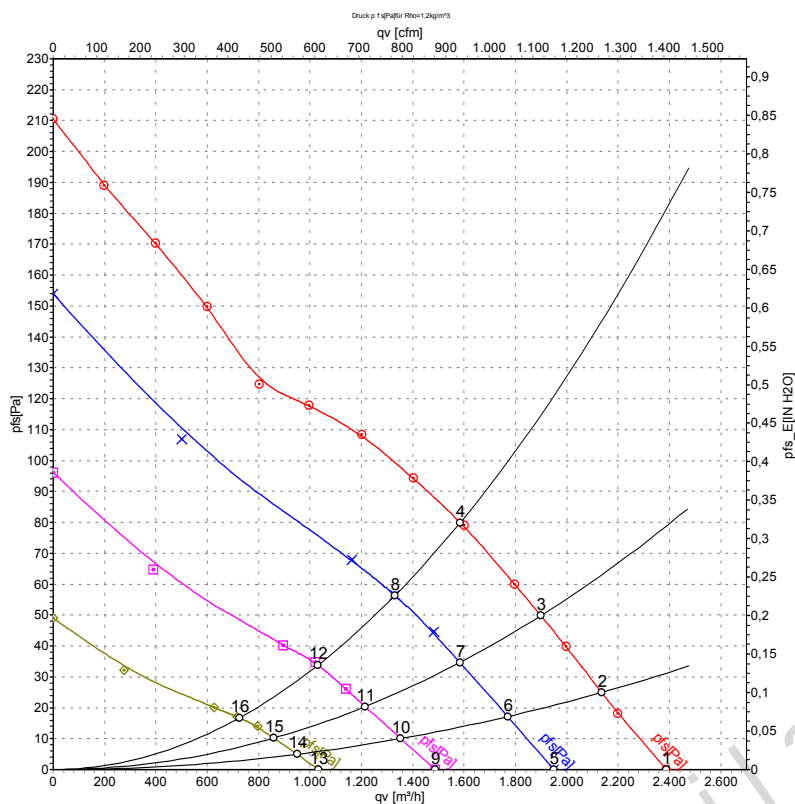

Measurement: LU-136633
 Measurement: LU-137015
 Measurement: LU-137016
 Measurement: LU-137017

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: L_{wA} measured as per ISO 13347 /
 L_{pA} measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	230	50	1740	81	0.67	59	66	2390	0
2	230	50	1710	88	0.74	59	66	2135	25
3	230	50	1690	93	0.77	59	66	1900	50
4	230	50	1660	98	0.80	59	66	1585	80
5	230	50	1430	46	0.43	54	61	1950	0
6	230	50	1415	49	0.46	54	61	1770	17
7	230	50	1400	51	0.49	54	61	1585	35
8	230	50	1390	55	0.50	54	62	1330	56
9	230	50	1090	23	0.23	47	54	1485	0
10	230	50	1085	24	0.25	47	54	1355	10
11	230	50	1075	25	0.26	46	54	1215	20
12	230	50	1070	27	0.28	47	54	1030	34
13	230	50	755	10	0.12	36	44	1035	0
14	230	50	755	11	0.12	36	44	950	5
15	230	50	750	11	0.13	36	44	860	10
16	230	50	750	12	0.14	36	44	725	17

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · qv = Air flow
 p_{fs} = Pressure increase