


D1G133-AB39-52

EC centrifugal fan

forward curved, dual inlet
with housing (without flange)

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2

D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	D1G133-AB39-52	
Motor	M1G074-BF	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 57
Frequency	Hz	-
Type of data definition		rfa
Speed	min ⁻¹	1780
Power input	W	105
Current draw	A	2.8
Max. ambient temperature	°C	60

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

D1G133-AB39-52

EC centrifugal fan

forward curved, dual inlet
with housing (without flange)

Technical features


General description	Integrated electronics
Size	133 mm
Operation mode	Continuous operation (S1)
Direction of rotation	Clockwise, seen on rotor
Mounting position	Any
Humidity class	F0
Insulation class	"B"
Cable exit	Variable
Motor bearing	Ball bearing
Mass	3.3 kg
Material of electronics housing	Rotor: Coated in black
Material of impeller	Sendzimir galvanized sheet steel
Motor protection	Reverse polarity and locked-rotor protection
Type of protection	IP 42
Protection class	I
Technical features	Control input 0-10 VDC / PWM, tach output, reverse polarity and locked rotor protection
Approval	CCC; CSA C22.2 Nr.77; UL 1004-1

D1G133-AB39-52

EC centrifugal fan

forward curved, dual inlet
with housing (without flange)

Product drawing


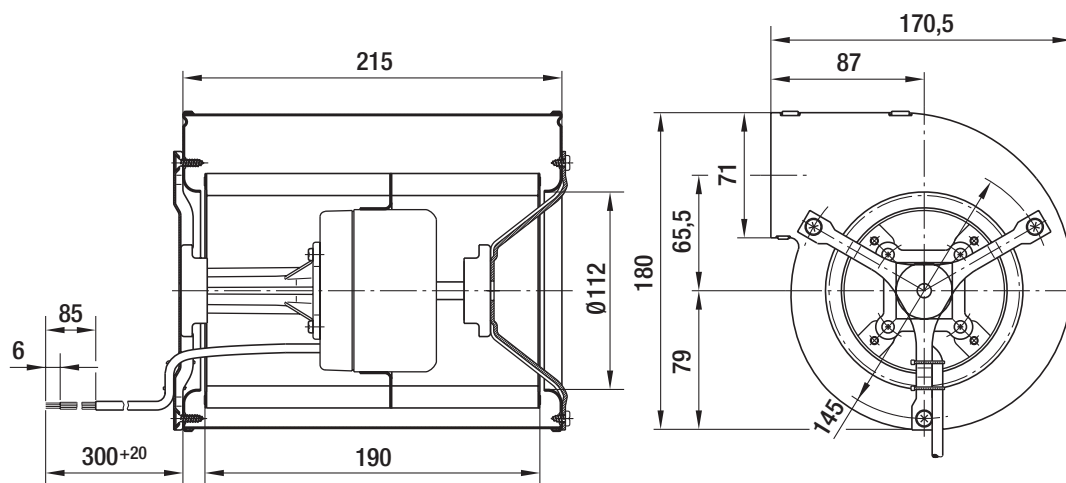


D1G133-AB39-52

EC centrifugal fan

forward curved, dual inlet
with housing (without flange)

Connection screen

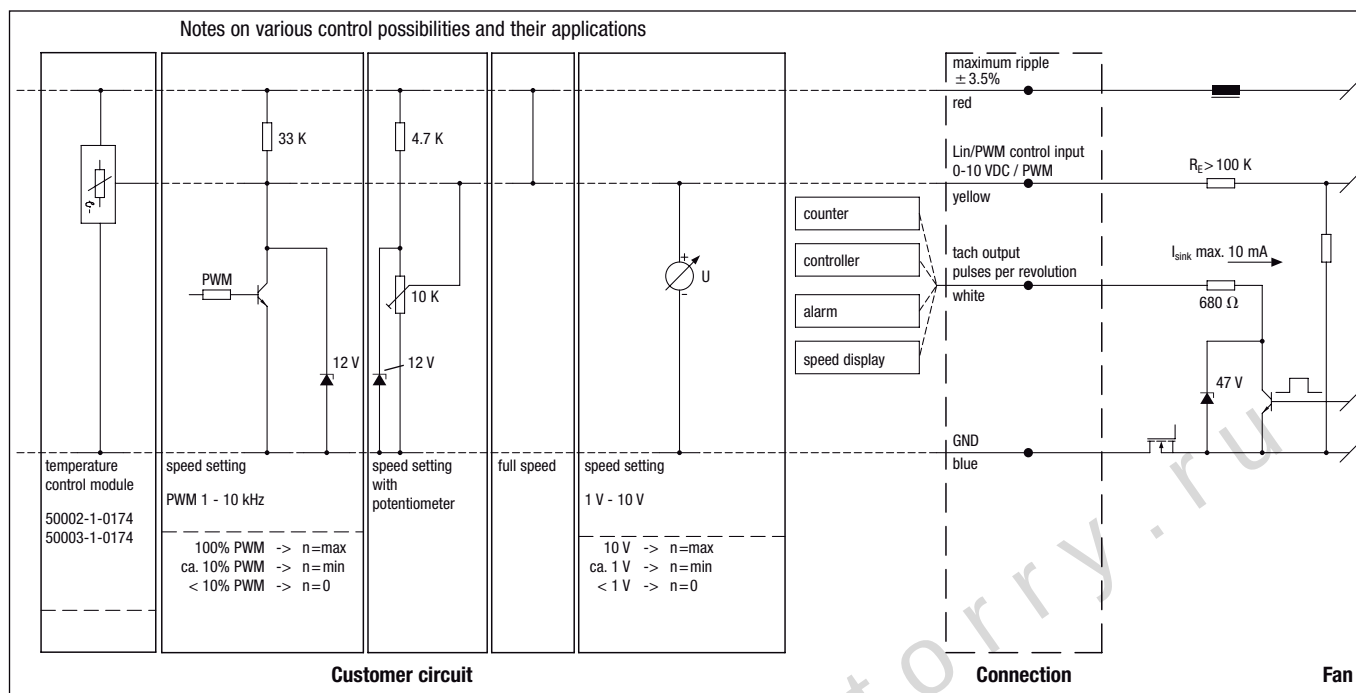

Line	Signal	Colour	Assignment / function
1	+	red	maximum ripple $\pm 3.5\%$
	GND	blue	GND


Line	Signal	Colour	Assignment / function
1	Tacho	white	Tach output: pulses per revolution
	0-10 V / PWM	yellow	Control input

D1G133-AB39-52

EC centrifugal fan

forward curved, dual inlet
with housing (without flange)

Charts: Air flow

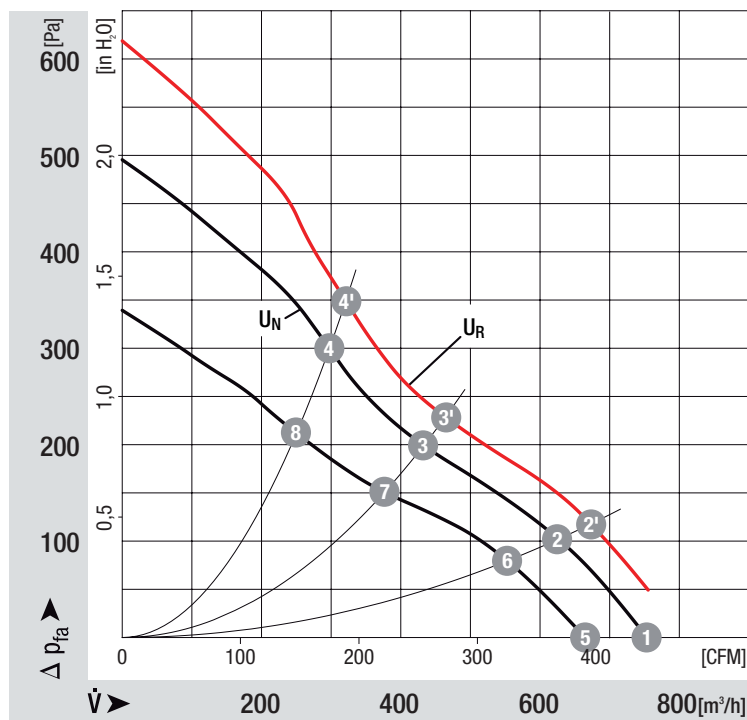

Measured values

	n	P _e
	min ⁻¹	W
1'		
2'	2050	121
3'	2490	106
4'	2820	100
1	1780	105
2	1900	97
3	2310	86
4	2630	80
5	1500	73
6	1720	67
7	2020	58
8	2230	49