

G2E133-DN77-01

AC centrifugal fan

forward curved, single inlet
with housing (without flange)

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	G2E133-DN77-01		
Motor	M2E068-BF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Type of data definition		rfa	rfa
Valid for approval / standard		CE	CE
Speed	min ⁻¹	2150	2100
Power input	W	88	110
Current draw	A	0.39	0.49
Motor capacitor	µF	2	2
Capacitor voltage	VDB	450	450
Min. back pressure	Pa	0	0
Max. ambient temperature	°C	55	50

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



G2E133-DN77-01

AC centrifugal fan

forward curved, single inlet
with housing (without flange)

Technical features


Mass	1.9 kg
Size	133 mm
Surface of rotor	Partially cast in aluminium
Material of impeller	Sendzimir galvanized sheet steel
Housing material	Sheet steel, hot-galvanised
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44
Insulation class	"B"
Humidity class	F0
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Leakage current	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I
Product conforming to standard	EN 60335-1; CE
Approval	CCC

G2E133-DN77-01

AC centrifugal fan


forward curved, single inlet
with housing (without flange)

Product drawing

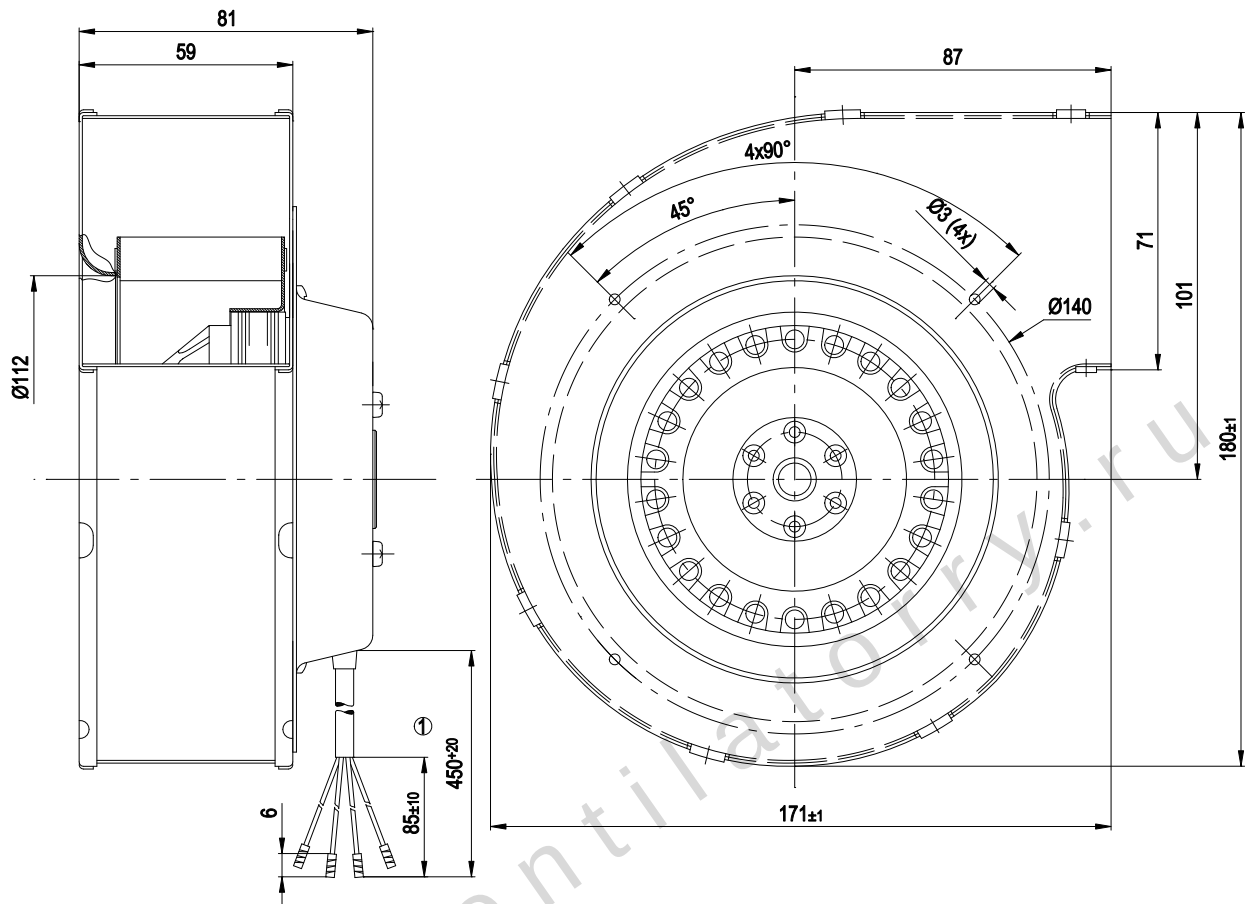

Connection line PVC 4G 0.5 mm², 4x brass lead tips crimped

Connection screen

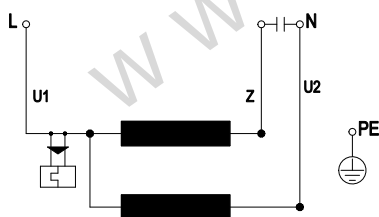


U1	blue	Z	brown	U2	black
PE	green/yellow				

G2E133-DN77-01

AC centrifugal fan

forward curved, single inlet
with housing (without flange)

Charts: Air flow 50 Hz

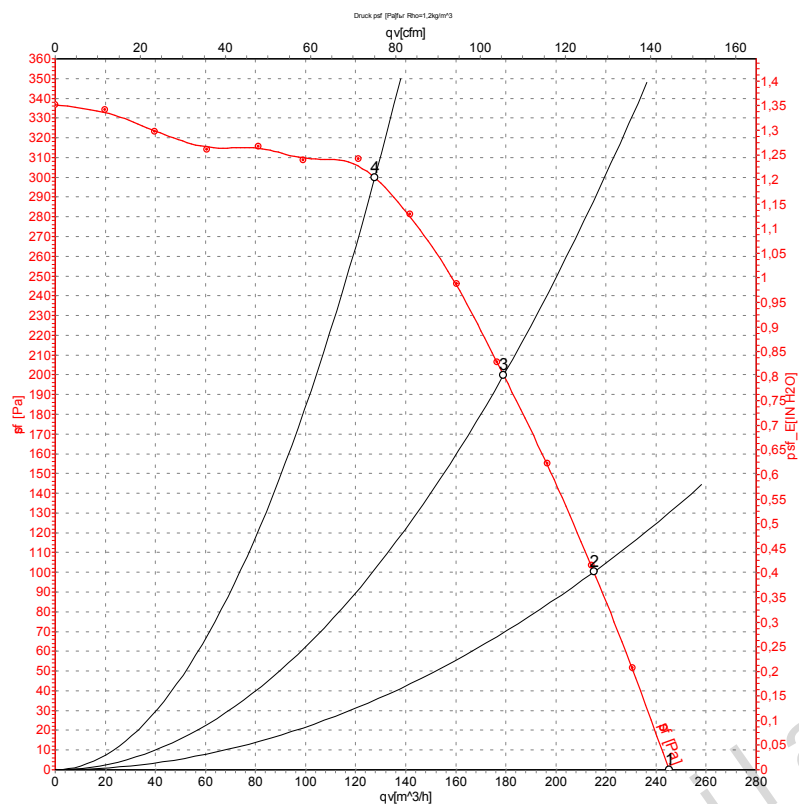

Measurement: LU-104594

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values


	U	f	n	P _e	I	q _v	p _{sf}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2150	88	0.39	245	0
2	230	50	2325	79	0.35	215	100
3	230	50	2460	74	0.33	180	200
4	230	50	2610	68	0.31	130	300

G2E133-DN77-01

AC centrifugal fan

forward curved, single inlet
with housing (without flange)

Charts: Air flow 60 Hz

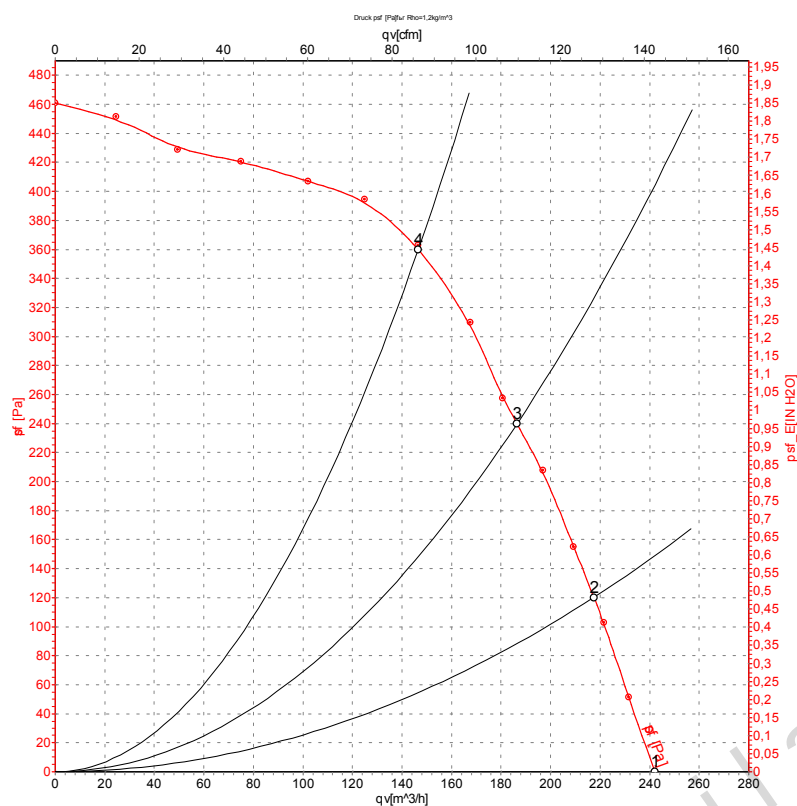

Measurement: LU-104597

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{st}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	60	2100	110	0.49	240	0
2	230	60	2400	99	0.43	220	120
3	230	60	2635	94	0.41	185	240
4	230	60	2875	88	0.38	145	360