

R2E108-AG63-05

AC centrifugal fan

forward curved, single inlet



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2

D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	R2E108-AG63-05		
Motor	M2E052-BF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Type of data definition		rfa	rfa
Valid for approval / standard		CE	CE
Speed	min ⁻¹	1850	1850
Power input	W	30	35
Current draw	A	0.14	0.16
Motor capacitor	μF	1	1
Capacitor voltage	VDB	400	400
Capacitor standard		P0 (CE)	P0 (CE)
Min. back pressure	Pa	0	0
Max. ambient temperature	°C	85	80

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

R2E108-AG63-05

AC centrifugal fan

forward curved, single inlet

Technical features


Size	108 mm
Operation mode	Continuous operation (S1)
Direction of rotation	Clockwise, seen on rotor
Insulation class	"B"
Cable exit	Variable
Motor bearing	Ball bearing
Mass	0.6 kg
Material of electronics housing	Rotor: Partially cast in aluminum
Material of impeller	Sendzimir galvanized sheet steel
Motor protection	Thermal overload protector (TOP) wired internally
Product conforming to standard	CE
Type of protection	IP 44
Protection class	I
Approval	CCC

R2E108-AG63-05

AC centrifugal fan

forward curved, single inlet

Product drawing

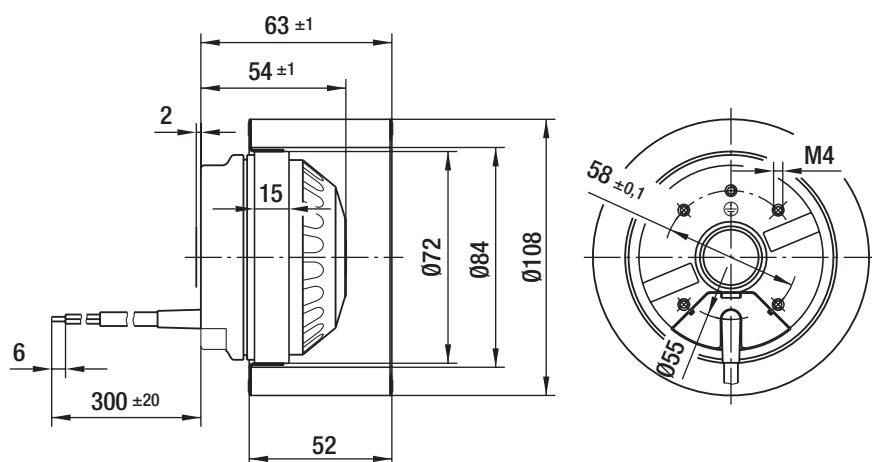


R2E108-AG63-05

AC centrifugal fan

forward curved, single inlet

Connection screen

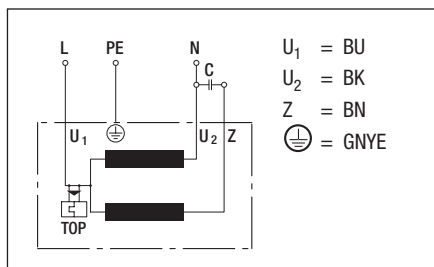


www.ventilatorry.ru

R2E108-AG63-05

AC centrifugal fan

forward curved, single inlet

Charts: Air flow 50 Hz

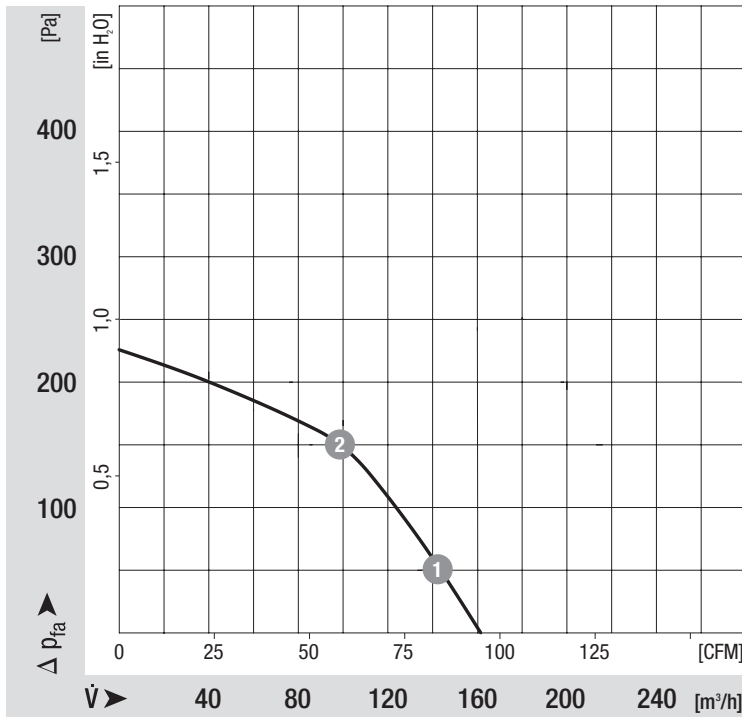

Measured values

	n	P _e	I
	min ⁻¹	W	A
1	2070	34	0.16
2	2470	31	0.15

R2E108-AG63-05

AC centrifugal fan

forward curved, single inlet

Charts: Air flow 60 Hz

