

R4E400-AN09-06

AC centrifugal fan

backward curved, single inlet



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2

74673 Mulfingen

Phone: +49 7938 81-0

Fax: +49 7938 81-110

www.ebmpapst.com

info1@de.ebmpapst.com

Nominal data

Type	R4E400-AN09-06		
Motor	M4E094-HA		
Nominal voltage	[V]	230	230
Frequency	[Hz]	50	60
Valid for approval / standard		CE	CE
Speed	[min ⁻¹]	1370	1500
Power input	[W]	480	695
Current draw	[A]	2,4	3.18
Motor capacitor	[μF]	10	10
Capacitor voltage	[VDB]	400	400
Air flow	[m ³ /h]	3900	4420
Back pressure	[Pa]	0	0
Sound pressure level	[dB(A)]	71	74

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

R4E400-AN09-06

AC centrifugal fan

backward curved, single inlet

Technical features


Size	400 mm
Operation mode	Continuous operation (S1)
Direction of rotation	Clockwise, seen on rotor
Insulation class	"F"
Cable exit	Variable
Bearing motor	Ball bearing
Mass	8.7 kg
Material of electronics housing	Rotor: Coated in black
Material of impeller	Aluminum sheet, riveted
Motor protection	Thermal overload protector (TOP) brought out
Number of blades	6
Type of protection	IP 54
Protection class	I
Approval	CCC

R4E400-AN09-06

AC centrifugal fan

backward curved, single inlet

Product drawing

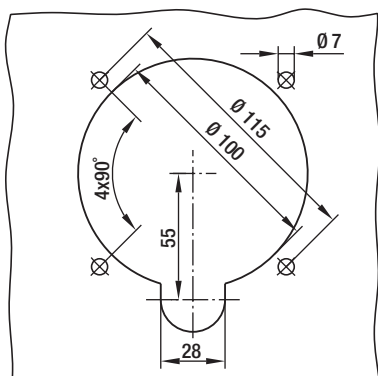


R4E400-AN09-06

AC centrifugal fan

backward curved, single inlet

Connection screen

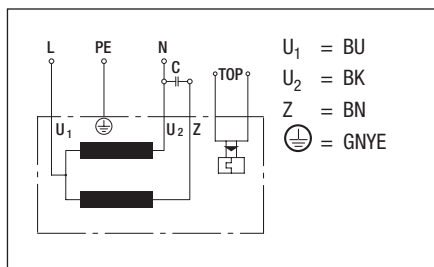


www.ventilatorry.ru

R4E400-AN09-06

AC centrifugal fan

backward curved, single inlet

Charts: Air flow 50 Hz

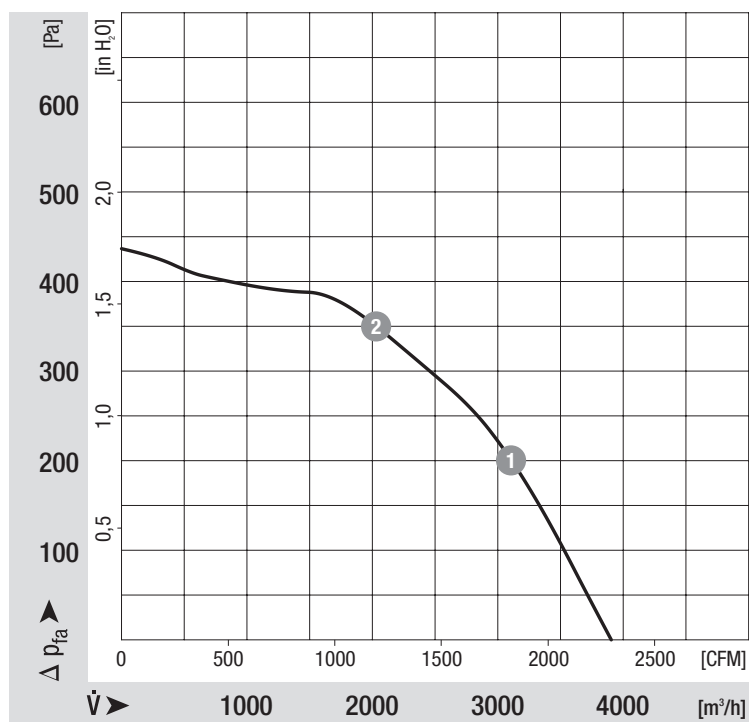

Measured values

	n	P ₁	I
	[min ⁻¹]	[W]	[A]
1	1380	464	2.36
2	1380	462	2.36

R4E400-AN09-06

AC centrifugal fan

backward curved, single inlet

Charts: Air flow 60 Hz

