

S3G300-AK13-52

## EC axial fan - HyBlade

sickled blades (S series)

with guard grille for short nozzle

## ebm-papst Mulfingen GmbH &amp; Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | S3G300-AK13-52    |            |
| Motor                    | M3G055-CF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 1500       |
| Power input              | W                 | 85         |
| Current draw             | A                 | 0.8        |
| Max. back pressure       | Pa                | 85         |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



S3G300-AK13-52

## EC axial fan - HyBlade

sickled blades (S series)

with guard grille for short nozzle

## Technical features

|                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 2.5 kg                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Size                                                               | 300 mm                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Surface of rotor                                                   | Thick layer passivated                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Material of terminal box                                           | ABS plastic                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Material of blades                                                 | Press-fitted sheet steel blank, sprayed with PP plastic                                                                                                                                                                                                                                                                                                                                                                                          |
| Material of guard grille                                           | Steel, coated in black plastic (RAL9005)                                                                                                                                                                                                                                                                                                                                                                                                         |
| Number of blades                                                   | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Direction of air flow                                              | "V"                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Insulation class                                                   | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Mounting position                                                  | Any                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Condensate discharge holes                                         | None, open rotor                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Output limit</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage detection</li> </ul> |
| EMC interference immunity                                          | Acc. to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                    |
| EMC harmonics                                                      | Acc. to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                           |
| EMC interference emission                                          | Acc. to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                     |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Electrical leads                                                   | Via terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Motor protection                                                   | Locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Cable exit                                                         | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                                                                                                                 |
| Product conforming to standard                                     | EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Approval                                                           | CCC                                                                                                                                                                                                                                                                                                                                                                                                                                              |


S3G300-AK13-52

# EC axial fan - HyBlade

sickled blades (S series)

with guard grille for short nozzle

## Product drawing

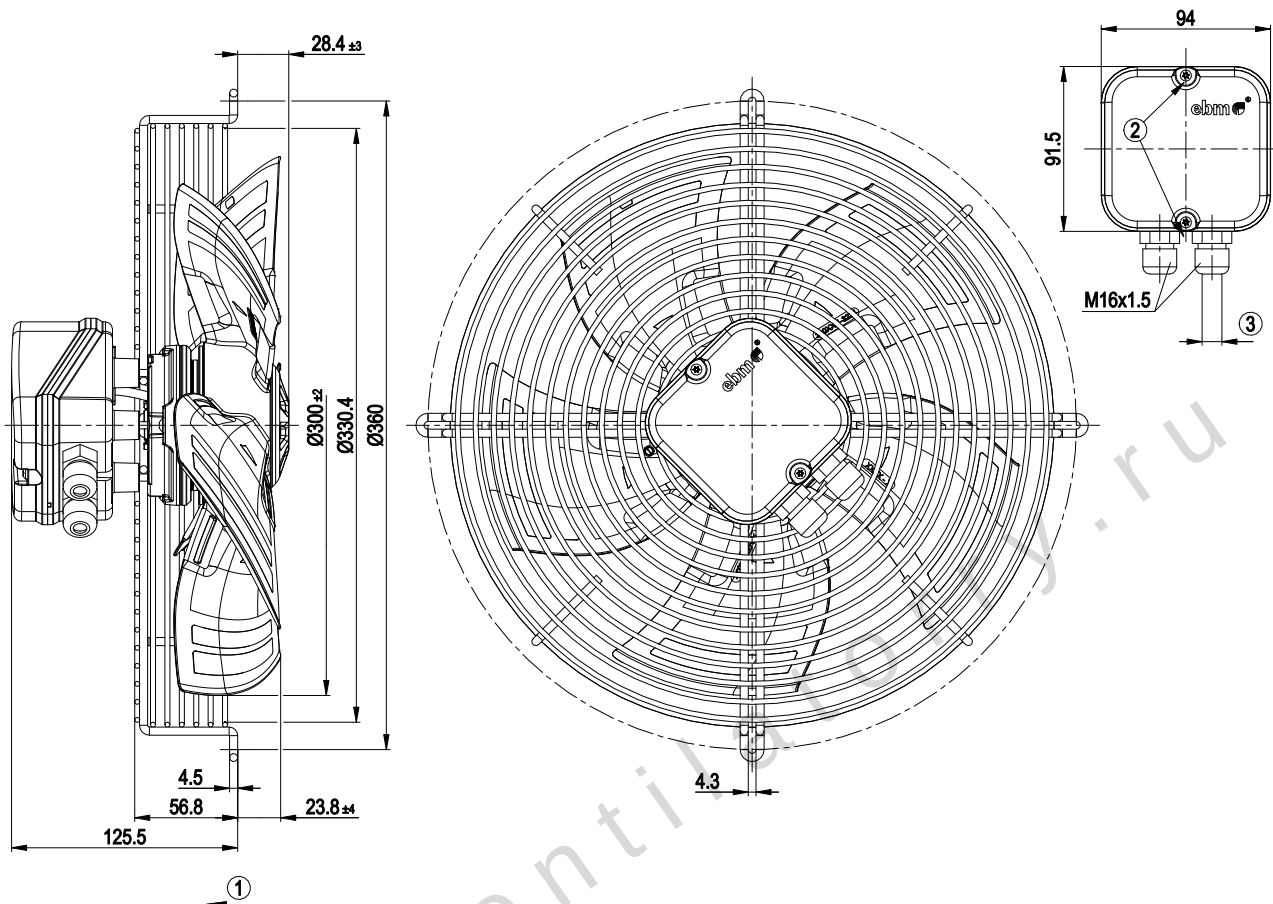

|   |                                                                |
|---|----------------------------------------------------------------|
| 1 | Direction of air flow "V"                                      |
| 2 | Tightening torque $0.5 \pm 0.1$ Nm                             |
| 3 | Cable diameter max. 7.5 mm, tightening torque $1.3 \pm 0.2$ Nm |


S3G300-AK13-52

# EC axial fan - HyBlade

sickled blades (S series)

with guard grille for short nozzle

## Connection screen

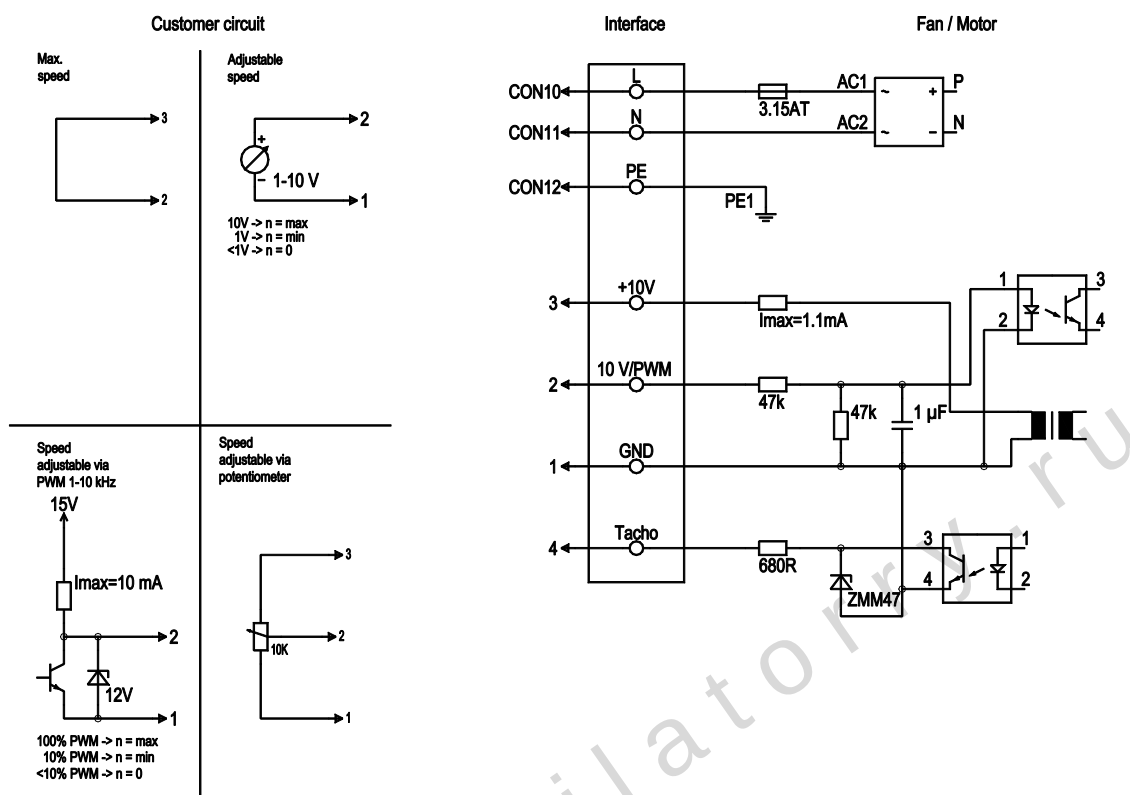

| No. | Conn. | Designation        | Colour       | Function / assignment                                                      |
|-----|-------|--------------------|--------------|----------------------------------------------------------------------------|
|     | CON10 | L                  | black        | Power supply 230 VAC, 50-60 Hz, see type plate for voltage range           |
|     | CON11 | N                  | blue         | Neutral conductor                                                          |
|     | CON12 | PE                 | green/yellow | Protective earth                                                           |
|     | 1     | GND                | blue         | GND connection for control interface                                       |
|     | 2     | 0-10V PWM          | yellow       | Control input 0-10 V or PWM, electrically isolated                         |
|     | 3     | 10 V / max. 1,1 mA | red          | Voltage output 10 VDC 1.1 mA, electrically isolated, short-circuit-proof   |
|     | 4     | Tacho              | white        | Tach output: Open collector, 1 pulse per revolution, electrically isolated |


S3G300-AK13-52

# EC axial fan - HyBlade

sickled blades (S series)

with guard grille for short nozzle

## Charts: Air flow 50 Hz

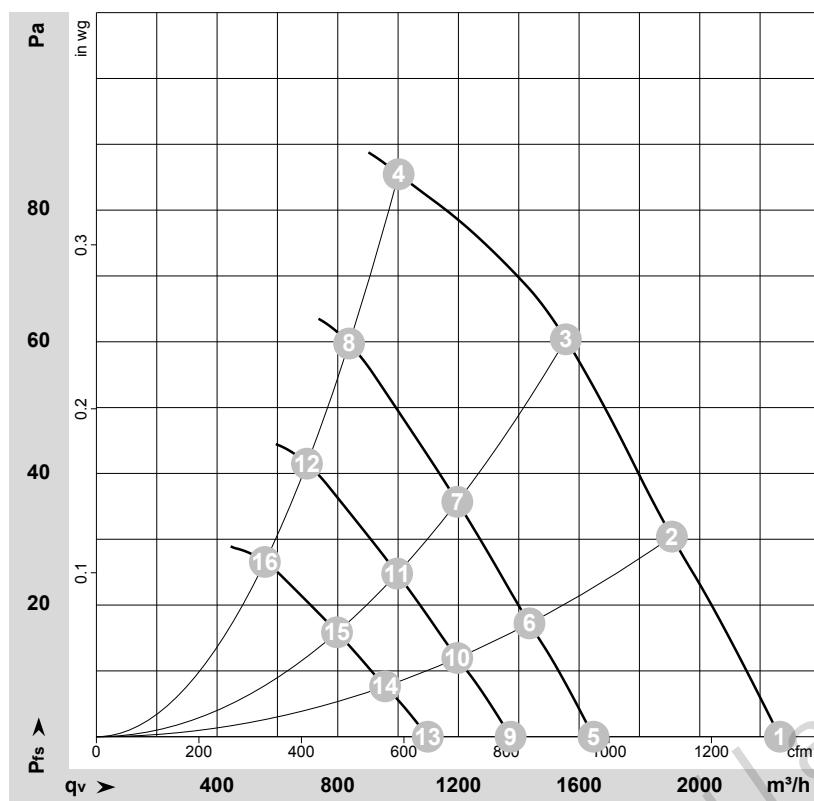

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-133717-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|--------------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | inH <sub>2</sub> O |
| 1  | 230 | 50 | 1650              | 72              | 0.63 | 55                | 63                | 2265           | 0               | 1335           | 0.00               |
| 2  | 230 | 50 | 1595              | 79              | 0.67 | 56                | 63                | 1910           | 30              | 1125           | 0.12               |
| 3  | 230 | 50 | 1560              | 85              | 0.80 | 54                | 62                | 1555           | 60              | 915            | 0.24               |
| 4  | 230 | 50 | 1500              | 85              | 0.80 | 58                | 67                | 1000           | 85              | 590            | 0.34               |
| 5  | 230 | 50 | 1200              | 28              | 0.24 | 47                | 55                | 1650           | 0               | 970            | 0.00               |
| 6  | 230 | 50 | 1200              | 33              | 0.29 | 49                | 56                | 1435           | 17              | 845            | 0.07               |
| 7  | 230 | 50 | 1200              | 38              | 0.32 | 48                | 55                | 1195           | 36              | 705            | 0.14               |
| 8  | 230 | 50 | 1200              | 48              | 0.41 | 53                | 62                | 840            | 60              | 495            | 0.24               |
| 9  | 230 | 50 | 1000              | 16              | 0.14 | 43                | 50                | 1375           | 0               | 810            | 0.00               |
| 10 | 230 | 50 | 1000              | 19              | 0.17 | 44                | 51                | 1195           | 12              | 705            | 0.05               |
| 11 | 230 | 50 | 1000              | 22              | 0.18 | 43                | 51                | 995            | 25              | 585            | 0.10               |
| 12 | 230 | 50 | 1000              | 28              | 0.24 | 49                | 57                | 700            | 42              | 410            | 0.17               |
| 13 | 230 | 50 | 800               | 8.0             | 0.07 | 37                | 45                | 1100           | 0               | 645            | 0.00               |
| 14 | 230 | 50 | 800               | 10.0            | 0.08 | 38                | 46                | 955            | 8               | 565            | 0.03               |
| 15 | 230 | 50 | 800               | 11              | 0.09 | 38                | 45                | 800            | 16              | 470            | 0.06               |
| 16 | 230 | 50 | 800               | 14              | 0.12 | 43                | 51                | 560            | 27              | 330            | 0.11               |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · q<sub>v</sub> = Air flow  
p<sub>fs</sub> = Pressure increase