

S3G910-BO83-01

# EC axial fan - HyBlade®

sickled blades (S series), single inlet  
with guard grille for full nozzle

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142



### Nominal data

Type	S3G910-BO83-01	
Motor	M3G112-IA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
Speed	min <sup>-1</sup>	610
Power input	W	625
Current draw	A	1.1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

### Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency $\eta_{es}$	%	45.5	28.2	32.2
Efficiency grade N		53.3	36	40
Power input $P_{ed}$	kW	0.59		
Air flow $q_v$	m <sup>3</sup> /h	11680		
Pressure increase $p_{fs}$	Pa	76		
Speed n	min <sup>-1</sup>	615		

Data definition with optimum efficiency. LU-120677  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



S3G910-BO83-01

# EC axial fan - HyBlade®

sickled blades (S series), single inlet

with guard grille for full nozzle

## Technical features


<b>Mass</b>	19.9 kg
<b>Size</b>	910 mm
<b>Surface of rotor</b>	Coated in black
<b>Material of electronics housing</b>	Die-cast aluminium
<b>Material of blades</b>	Press-fitted sheet steel blank, sprayed with PP plastic
<b>Material of guard grille</b>	Steel, coated in black plastic (RAL9005)
<b>Number of blades</b>	5
<b>Direction of air flow</b>	"V"
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Type of protection</b>	IP 54
<b>Insulation class</b>	"B"
<b>Humidity class</b>	F4-1
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Shaft horizontal or rotor on bottom
<b>Condensate discharge holes</b>	Rotor-side
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limit</li> <li>- PFC, passive</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
<b>EMC interference immunity</b>	Acc. to EN 61000-6-2 (industrial environment)
<b>EMC harmonics</b>	Acc. to EN 61000-3-2/3
<b>EMC interference emission</b>	Acc. to EN 61000-6-4 (industrial environment)
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	<= 3.5 mA
<b>Motor protection</b>	Thermal overload protector (TOP) wired internally
<b>Cable exit</b>	Variable
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 61800-5-1; CE
<b>Approval</b>	EAC

S3G910-BO83-01

# EC axial fan - HyBlade®

sickled blades (S series), single inlet  
with guard grille for full nozzle

## Product drawing

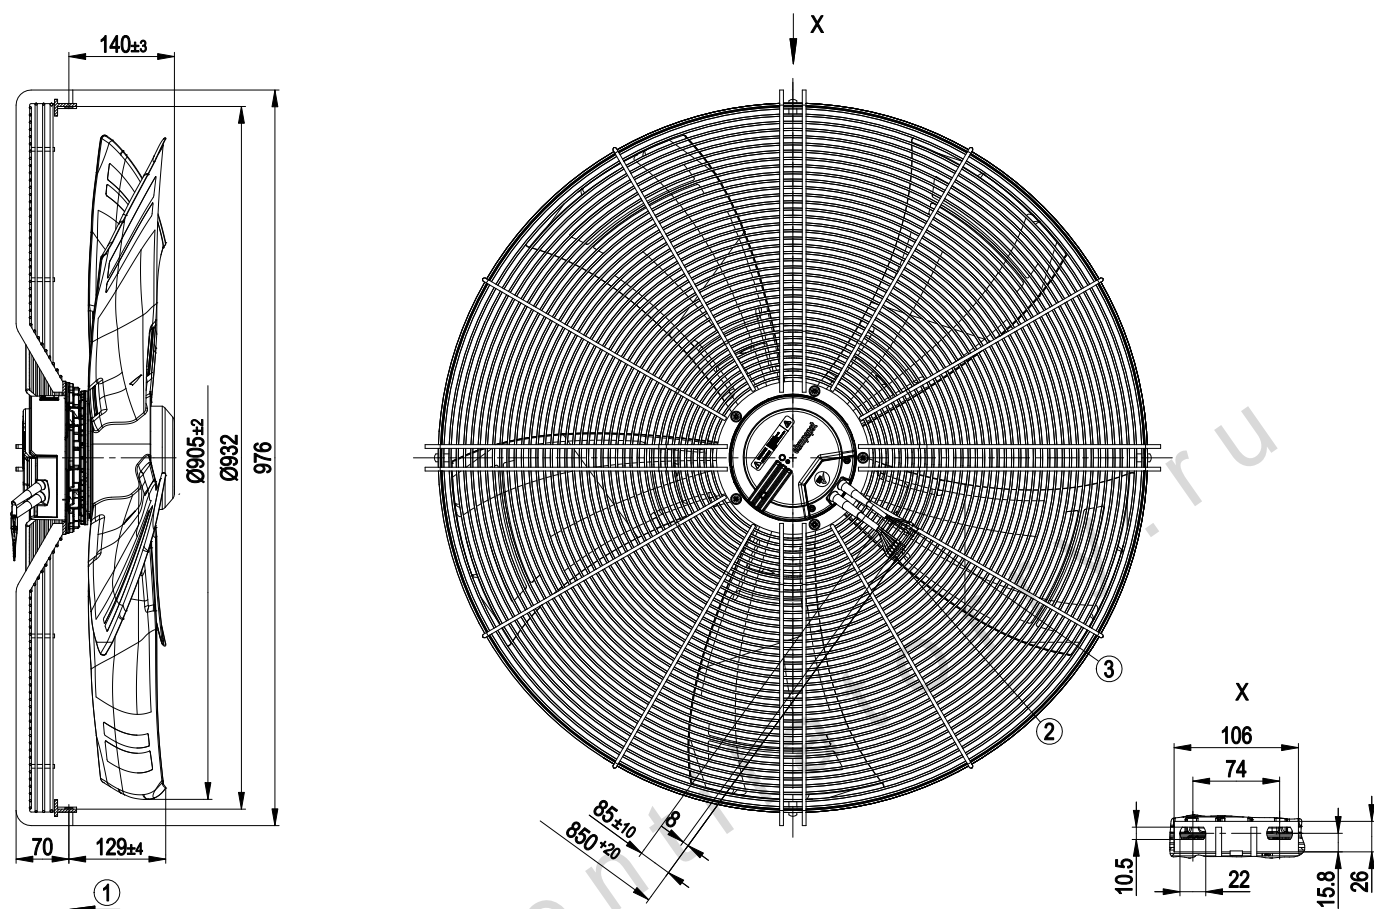


1	Direction of air flow "V"
2	Connection line PVC AWG18, 6x crimped core-end sleeves
3	Connection line PVC AWG22, 3x crimped core-end sleeves

S3G910-BO83-01

# EC axial fan - HyBlade®

sickled blades (S series), single inlet  
with guard grille for full nozzle

## Connection screen

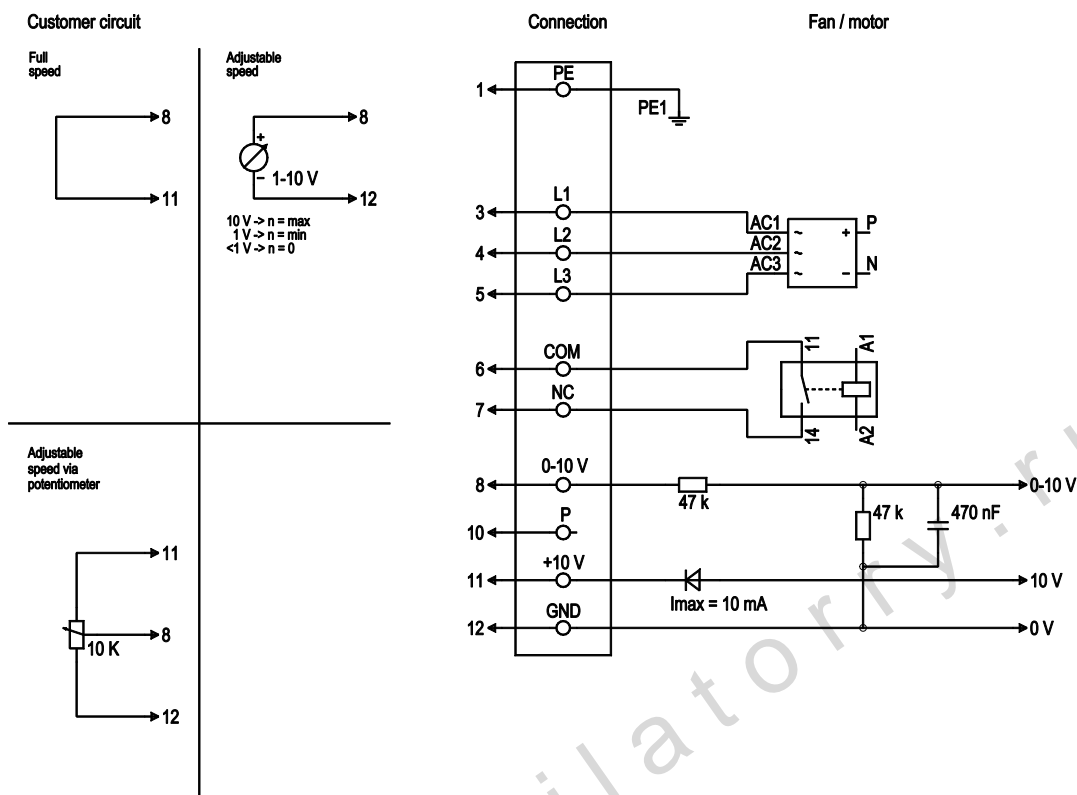


No.	Conn.	Designation	Colour	Function / assignment
1	1	PE	green/yellow	Ground wire
1	3	L1	black	Supply voltage, 50/60 Hz
1	4	L2	black	Supply voltage, 50/60 Hz
1	5	L3	black	Supply voltage, 50/60 Hz
1	6	COM	white 1	Floating status message contact, normally closed connection (2 A, max. 250 VAC, min. 10 mA, AC1)
1	7	NC	white 2	Floating status message contact, normally closed connection
2	8	0-10 V	yellow	Control input, set value 0-10 VDC, impedance 100 kΩ, SELV
2	10	P	orange	Do not use
2	11	+10 V	red	Voltage output 10 VDC (+/-3%), max. 10 mA, supply voltage for external devices (e.g. potentiometer), SELV
2	12	GND	blue	Reference mass for control interface, SELV

S3G910-B083-01

# EC axial fan - HyBlade®

sickled blades (S series), single inlet  
with guard grille for full nozzle

## Charts: Air flow 50 Hz

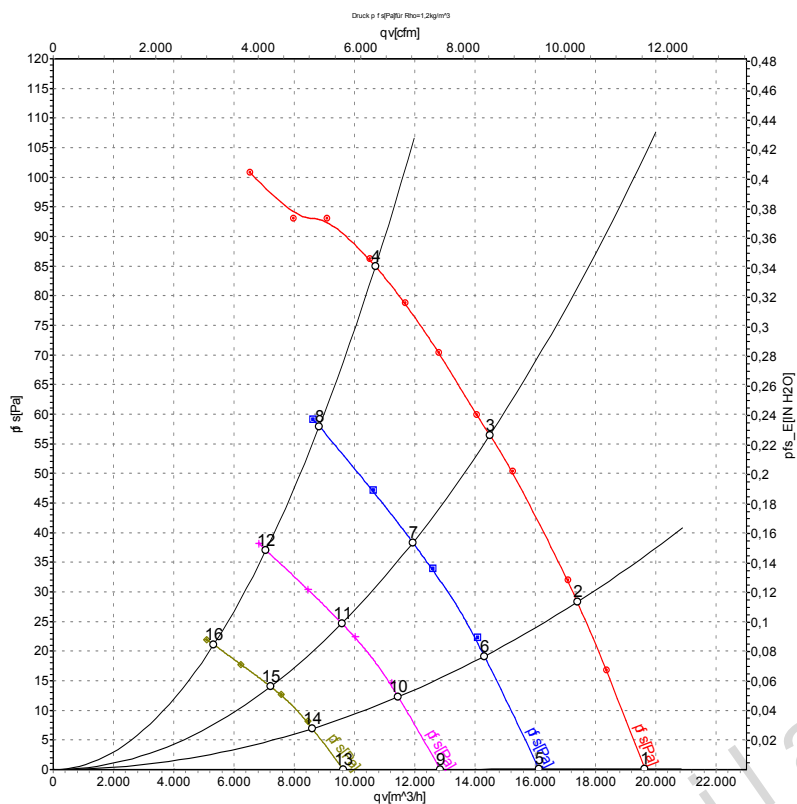

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	qv	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa
1	400	50	610	380	0.69	60	68	67	19630	0
2	400	50	610	463	0.77	59	66	65	17390	28
3	400	50	610	541	0.89	58	66	65	14480	56
4	400	50	610	625	1.10	62	70	70	10690	85
5	400	50	505	213	0.43	56	62	61	16120	0
6	400	50	505	259	0.51	55	61	60	14300	20
7	400	50	505	300	0.57	55	61	60	11930	38
8	400	50	505	340	0.63	56	63	63	8825	58
9	400	50	405	120	0.28	50	56	56	12830	0
10	400	50	405	143	0.32	52	56	55	11440	13
11	400	50	405	165	0.35	50	55	54	9575	25
12	400	50	405	185	0.38	50	57	57	7060	37
13	400	50	305	63	0.18	41	47	47	9625	0
14	400	50	305	71	0.20	43	49	49	8595	7
15	400	50	305	80	0.21	42	48	48	7215	14
16	400	50	305	89	0.22	42	48	49	5325	21

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
qv = Air flow · p<sub>fs</sub> = Pressure increase

