

W3G400-CN04-30

EC axial fan - HyBlade®

sickled blades (S series)

Wall ring with guard grille, Automotive

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142



Nominal data

Type	W3G400-CN04-30	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed	min ⁻¹	1080
Power input	W	140
Current draw	A	1.15
Max. back pressure	Pa	75
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}	%	36.8	24.1	28.1
Efficiency grade N		48.7	36	40
Power input P_{ed}	kW	0.13		
Air flow q_v	m ³ /h	2700		
Pressure increase p_{fs}	Pa	58		
Speed n	min ⁻¹	1095		

Data definition with optimum efficiency.

LU-137607

The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



W3G400-CN04-30

EC axial fan - HyBlade®

sickled blades (S series)

Wall ring with guard grille, Automotive

Technical features

Size	400 mm
Material of blades	PP-GF40 plastic
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Cooling bore / aperture	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Motor current limit - Soft start - Over-temperature protected electronics / motor
Speed steps	2
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	PTC resistor
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Approval	CCC


W3G400-CN04-30

EC axial fan - HyBlade®

sickled blades (S series)

Wall ring with guard grille, Automotive

Product drawing

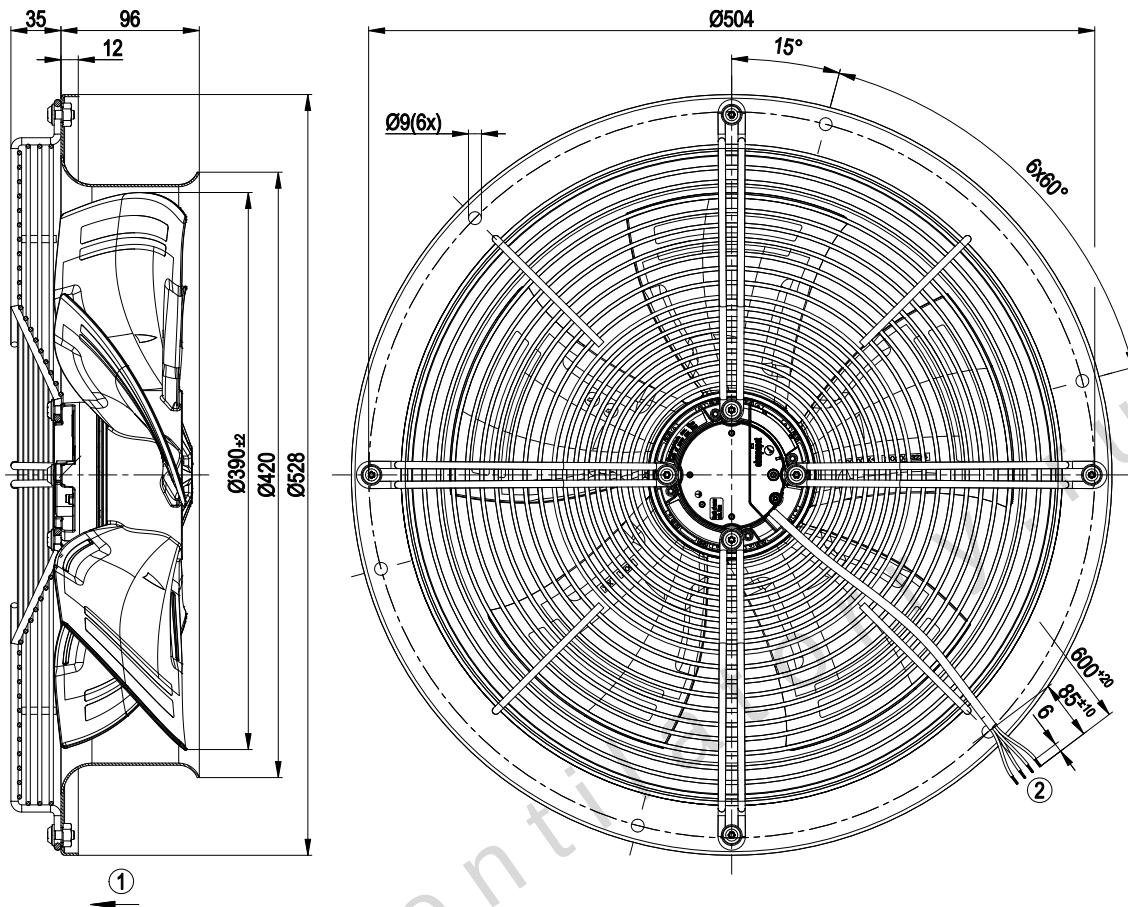

- | | |
|---|--|
| 1 | Direction of air flow "V" |
| 2 | Connection line PVC 4G AWG20, 4x brass lead tips crimped |


W3G400-CN04-30

EC axial fan - HyBlade®

sickled blades (S series)

Wall ring with guard grille, Automotive

Connection screen

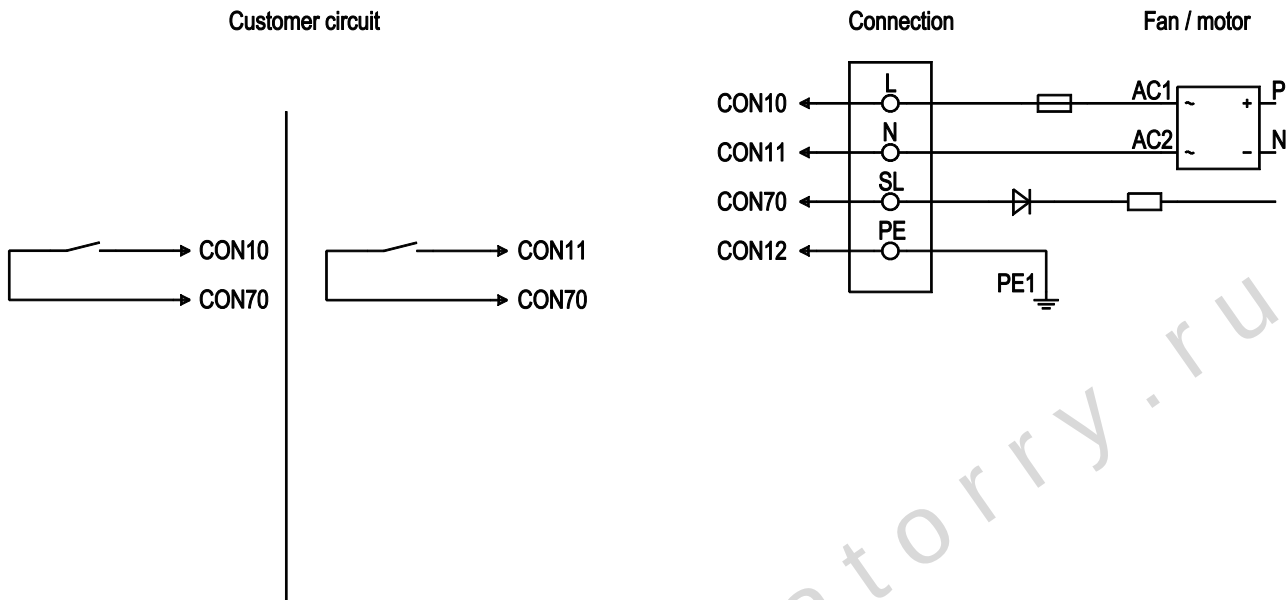

No.	Conn.	Designation	Colour	Function / assignment
	CON 10	L	black	Power supply 230 VAC, 50 - 60 Hz, see type plate for voltage range
	CON 11	N	blue	Neutral conductor
	CON 12	PE	green/yellow	Protective earth
	CON 70	SL	brown	Speed selection: switch open = speed 1; switch closed = speed 2


W3G400-CN04-30

EC axial fan - HyBlade®

sickled blades (S series)

Wall ring with guard grille, Automotive

Charts: Air flow 50 Hz

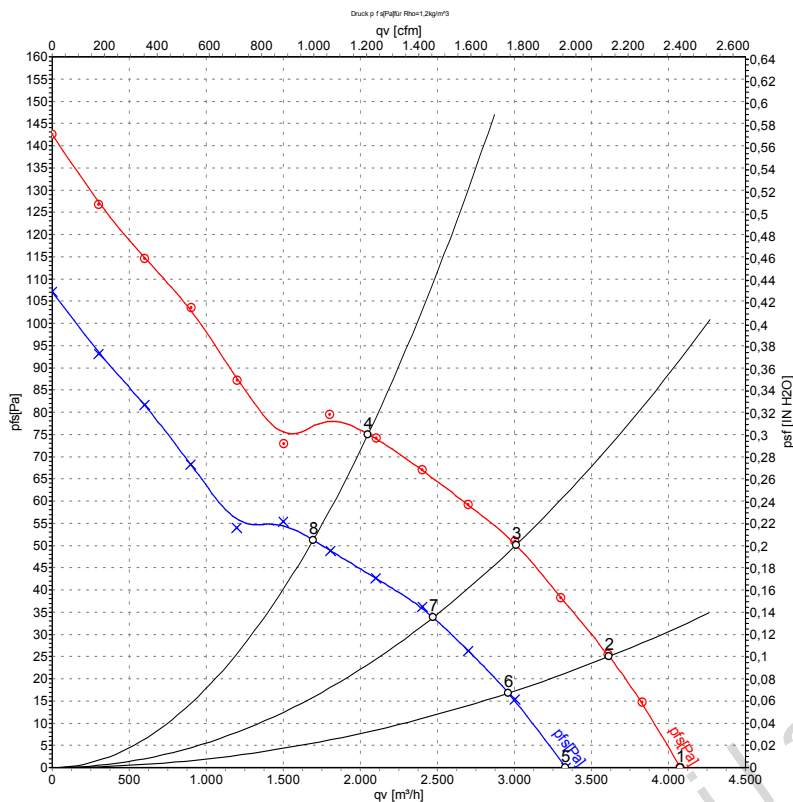

Measurement: LU-137607
Measurement: LU-137608

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	L _{pA_{in}}	L _{wA_{in}}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	230	50	1135	116	0.97	62	69	4075	0
2	230	50	1115	126	1.05	60	67	3615	25
3	230	50	1100	131	1.07	56	64	3010	50
4	230	50	1080	140	1.15	59	67	2050	75
5	230	50	930	64	0.60	58	65	3330	0
6	230	50	915	70	0.61	56	63	2960	17
7	230	50	905	73	0.64	52	59	2470	34
8	230	50	890	78	0.69	55	63	1695	51

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side · qv = Air flow
p_{fs} = Pressure increase