

4300 Series

Tubeaxial

119x119x32mm



■ DC fans with electronically commutated external rotor motor. Fully integrated commutation electronics.

■ With electronic protection against reverse polarity, blocking and overloading by PTC-resistor; partially impedance protected.

■ Mounting from either face using four 4.3 mm holes.



■ Fan of fiberglass reinforced plastic. PBTP housing, PA impeller.

■ Air exhaust over struts. Rotational direction CW looking at rotor.

■ Electrical connection via leads AWG 22, TR 64. Stripped and tinned ends.

■ UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	CFM @ 0	Curve	Volts	Voltage Range	Power (W)	dBA	Max Ambient Temp C	Wgt. (lbs)	Type Of Bearing	Features
4312GL	56	1	12	6 to 15	1.2	30	75	0.5	Sintec	Leads
4312L	56	1	12	6 to 15	1.2	30	75	0.5	Ball	Leads
4312LS	56	1	12	6 to 15	1.2	30	75	0.5	Ball	Leads
4392L	56	1	12	6 to 15	1.2	30	75	0.5	Ball	Terminals
4312GM	82	2	12	6 to 15	2.6	39	75	0.5	Sintec	Leads
4312M	82	2	12	6 to 15	2.6	39	75	0.5	Ball	Leads
4312MS	82	2	12	6 to 15	2.6	39	75	0.5	Ball	Leads
4392M	82	2	12	6 to 15	2.6	39	75	0.5	Ball	Terminals
4312	100	3	12	6 to 15	5.0	45	75	0.5	Ball	Leads
4312G	100	3	12	6 to 15	5.0	45	75	0.5	Sintec	Leads
4312S	100	3	12	6 to 15	5.0	45	75	0.5	Ball	Leads
4392	100	3	12	6 to 15	5.0	45	75	0.5	Ball	Terminals
4312-143	106	4	12	6 to 15	5.8	47	75	0.5	Ball	Leads
4312-179	120	5	12	6 to 13.2	8.5	51	75	0.5	Ball	Leads
4314L	56	1	24	12 to 28	1.2	30	75	0.5	Ball	Leads

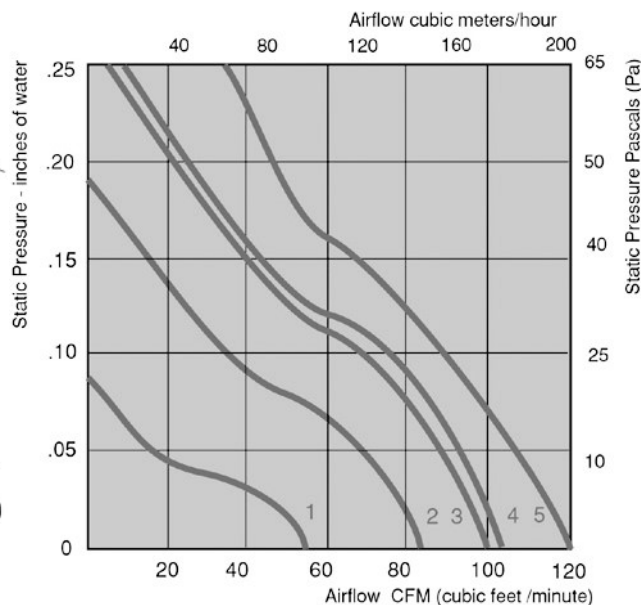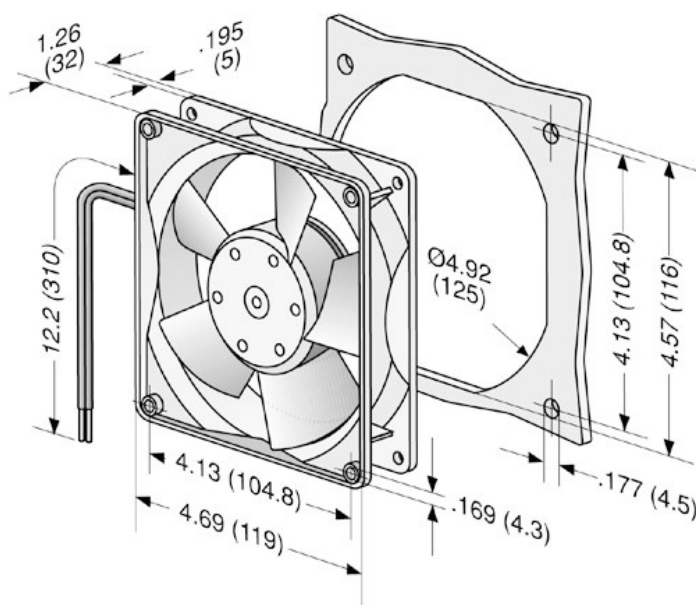

ebm
INDUSTRIES, INC.

e-mail: sales@ebm.com • TEL: 860-674-1515 • FAX: 860-674-8536

ebm Industries, Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm Industries, Inc., 2003 © ebm Industries, Inc. reserves the right to change any specifications or data without notice

ВЕНТИЛЯТОРЫ.RU
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ

E-mail: zakaz@ventilatorry.ru