

Product Data Sheet 6224 NI

ebm**papst**

The engineer's choice



6224 NI

INDEX

1	General	3
2	Mechanics	3
2.1	General	3
2.2	Connections	3
3	Operating Data	4
3.1	Electrical Interface - Input	4
3.2	Electrical Operating Data	5
3.3	Electrical Features	5
3.4	Aerodynamics	7
3.5	Sound Data	8
4	Environment	8
4.1	General	8
4.2	Climatic Requirements	8
5	Safety	9
5.1	Electrical Safety	9
5.2	Approval Tests	9
6	Reliability	9
6.1	General	9

1 General

Fan type	Fan	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


2 Mechanics

2.1 General

Depth	51,0 mm	
Diameter	172,0 mm	
Mass	0,780 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 600 Ncm Remaining corners: 600 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Plug	
Lead wire length	See drawing	
Tolerance		
Plug	See drawing	
Contact	See drawing	





3 Operating Data

3.1 Electrical Interface - Input

Control input	Internal Temperature Sensor
---------------	-----------------------------

Features

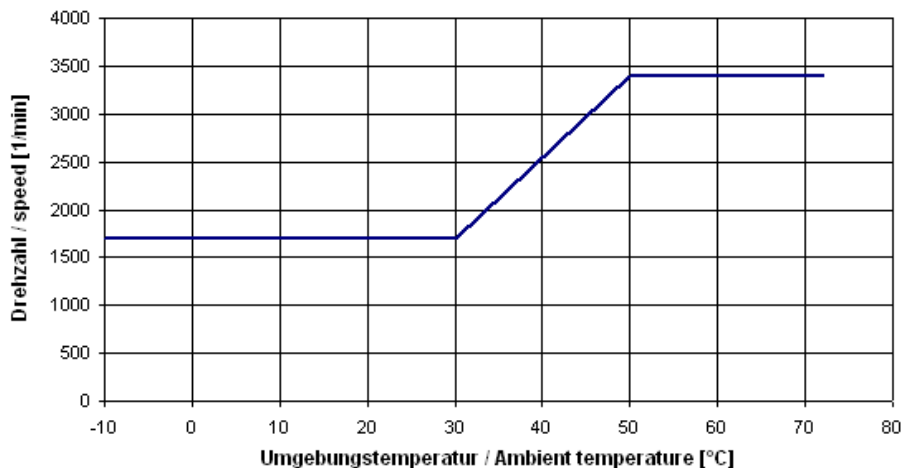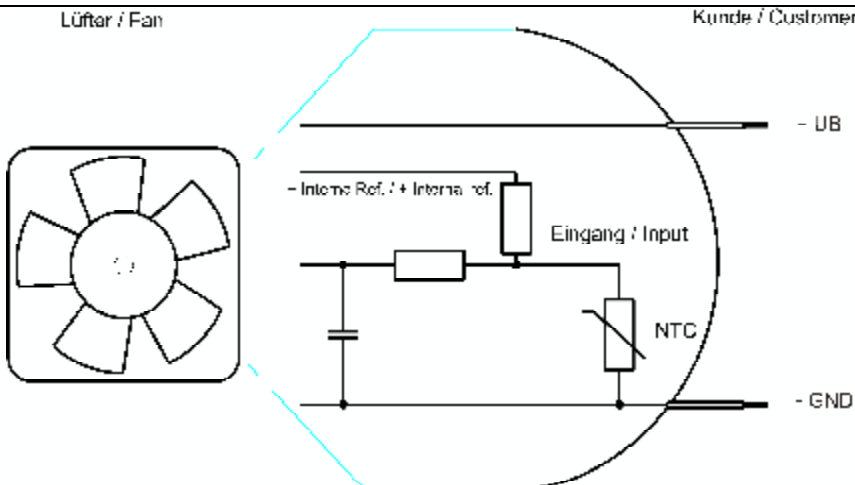Characteristics	 <table border="1"> <caption>Graph Data: Fan Speed vs. Ambient Temperature</caption> <thead> <tr> <th>Umgebungstemperatur / Ambient temperature [°C]</th> <th>Drehzahl / speed [1/min]</th> </tr> </thead> <tbody> <tr><td>-10</td><td>1700</td></tr> <tr><td>0</td><td>1700</td></tr> <tr><td>10</td><td>1700</td></tr> <tr><td>20</td><td>1700</td></tr> <tr><td>30</td><td>1700</td></tr> <tr><td>40</td><td>2500</td></tr> <tr><td>50</td><td>3400</td></tr> <tr><td>60</td><td>3400</td></tr> <tr><td>70</td><td>3400</td></tr> <tr><td>75</td><td>3400</td></tr> </tbody> </table>	Umgebungstemperatur / Ambient temperature [°C]	Drehzahl / speed [1/min]	-10	1700	0	1700	10	1700	20	1700	30	1700	40	2500	50	3400	60	3400	70	3400	75	3400
Umgebungstemperatur / Ambient temperature [°C]	Drehzahl / speed [1/min]																						
-10	1700																						
0	1700																						
10	1700																						
20	1700																						
30	1700																						
40	2500																						
50	3400																						
60	3400																						
70	3400																						
75	3400																						
Schematics	 The schematic shows a fan (Lüfter / Fan) connected to a customer's power supply (Kunde / Customer). The fan's internal reference (Internes Ref. / + Internes ref.) is connected to the customer's power supply (UB). The fan's input (Eingang / Input) is connected to the customer's ground (GND) through an NTC (Negative Temperature Coefficient) sensor. The fan's ground is also connected to the customer's ground (GND).																						

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)
 I: corresp. to arithm. mean current value


Name	Condition		
TU 0001	TU: ≥ 50 °C		
NTC 0001			

Tu ≥ 50 °C or broken Sensor.

Features	Condition	Symbol	Values		
Voltage range		U	12 V		28 V
Nominal voltage		U_N		24 V	
Power consumption	$\Delta p = 0$	P	2,8 W	18 W	18,5 W
Tolerance	TU / NTC 0010		+/- 15 %	+/- 15 %	+/- 15 %
Current consumption	$\Delta p = 0$	I	230 mA	750 mA	660 mA
Tolerance	TU / NTC 0010		+/- 15 %	+/- 15 %	+/- 15 %
Speed	$\Delta p = 0$	n	1.800 1/min	3.400 1/min	3.800 1/min
Tolerance	TU / NTC 0010		+/- 10 %	+/- 8 %	+/- 10 %
Starting current consumption				≤ 1.000 mA	

3.3 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at U_N	$I_F \leq 10$ mA	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 1.000 mA	
Clock signal at locked rotor	t_3 / t_4 typical: 0,5 s / 5,0 s	

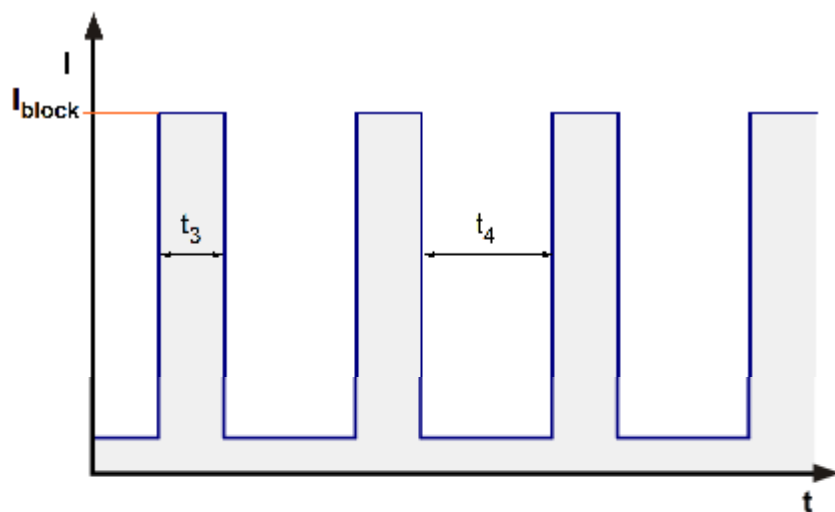

3.4 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;


In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

3.400 1/min at free air flow	TU >= 50 °C		
------------------------------	-------------	--	--

Max. free-air flow ($\Delta p = 0$ / $\dot{V} = \text{max.}$)	390,0 m ³ /h	
Max. static pressure ($\Delta p = \text{max.}$ / $\dot{V} = 0$)	180 Pa	

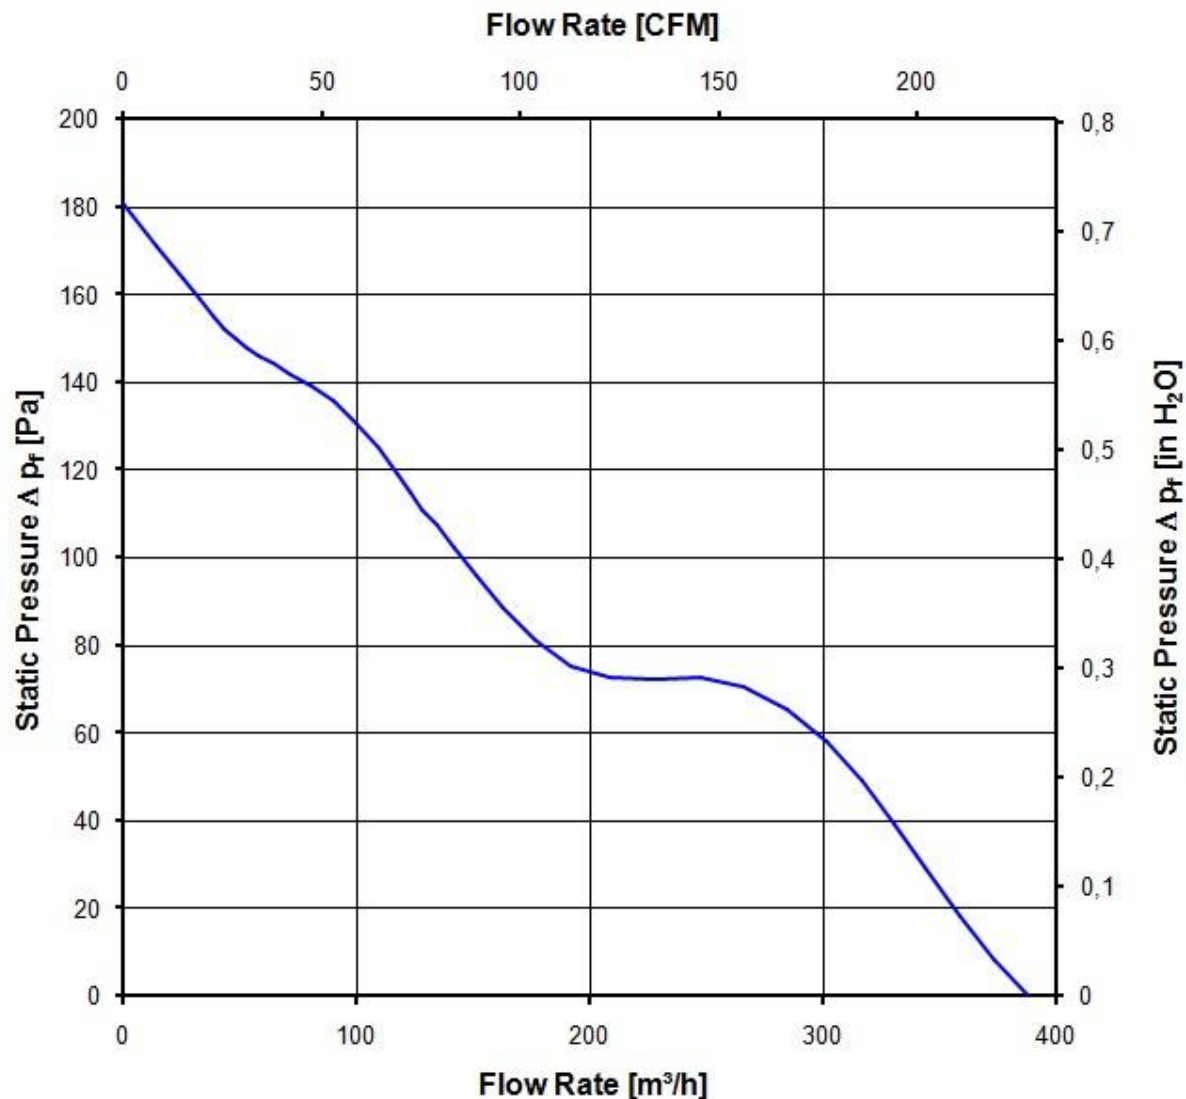

3.5 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

3.400 1/min at free air flow	TU $\geq 50^\circ\text{C}$		
------------------------------	----------------------------	--	--

Optimal operating point	285,0 m ³ /h @ 58 Pa	
Sound power level at the optimal operating point	6,1 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	55,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-10 °C	
Max. permitted ambient temperature TU max.	72 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 850 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

CE	EC Declaration of Conformity	No
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Not applicable


6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	75.000 h	
Life expectancy L10 at TU max.	35.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	127.500 h	


Copyright of the drawings and designs is to others and they are the property of the company. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Судящему, по DIN ISO 14648, beachten!
Refer to perfection notice DIN ISO 14648!

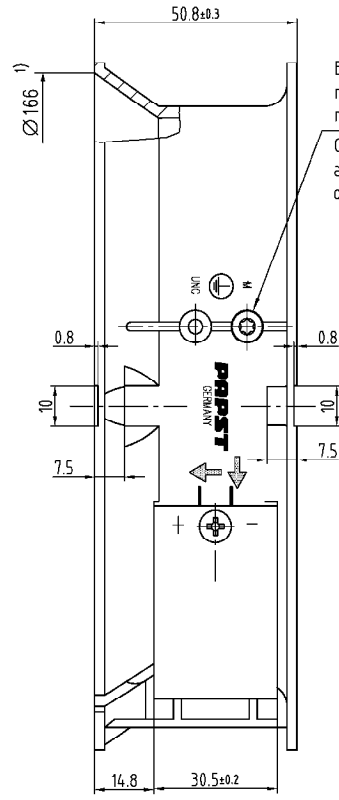


Ⓜ
Erdungsschraube Duo-Taprite
nach DIN 7500, CM 4x8, Torx
nur, wenn in Unterstückliste enthalten.
Grounding screw Duo-Taprite
according to DIN 7500, CM 4x8, Torx
only, if contained in sub-bill of material

Maße für Steckeranschluss
dimensions for plug connector



- Axialspiel: mit Feder spielfrei verspannt
1) Maße für Montagewand
- without axial clearance by a pre-loaded spring
1) dimensions for assembly wall

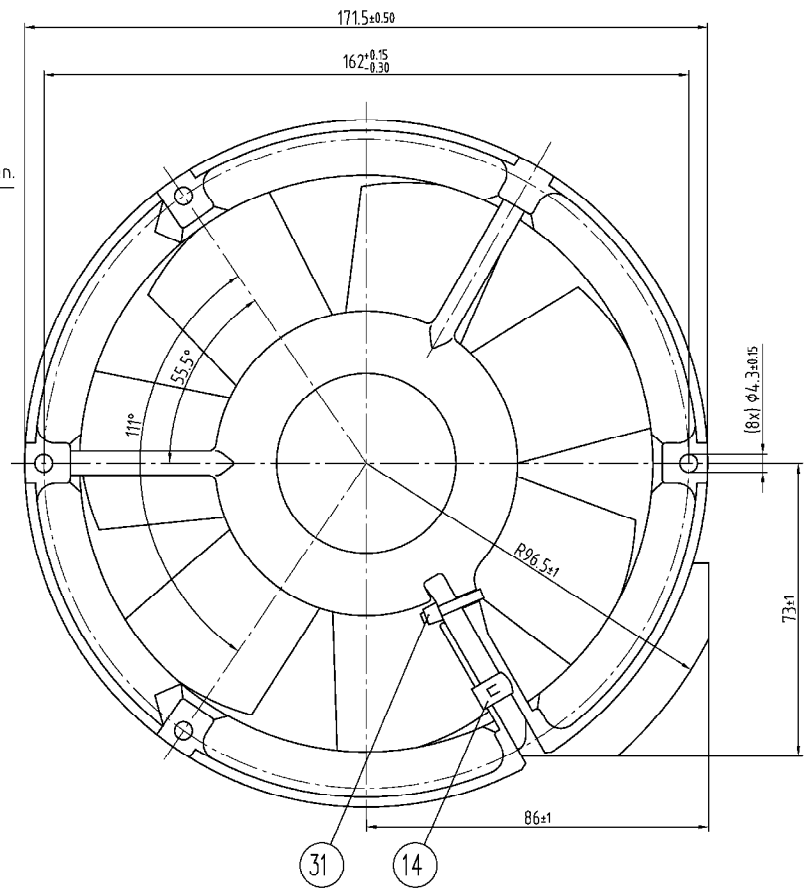

SAP-Status/State	Acad. Nr./Change No.	APRiCAD-System-Version	ebmpapst CAD-Umgebung/ CAD-Environment	Werkstoff/Material:	Volumen/Volume (mm³):
		Rechn./Date	Name/Name		Gewicht/Mass (g):
Bohr-/ Drawn				Artikel/Title	
Gepr./ Checked					
Freig./ Released					
Tolerierung/Tolerances:		Zchg.-Nr./Drawing.-No.:		Ers./Zchg./Replaces:	
Allgemeintoleranzen/Gen. Tolerances:		ebmpapst		Dokumen/Type of Document	Index/Index
		ebm-papst St. Leonen GmbH & Co. KG		Format/Size	Missst./dilate